

# PILOT'S OPERATING HANDBOOK

## PIPER CHEROKEE ARCHER II



FAA APPROVED IN NORMAL AND UTILITY CATEGORIES BASED ON CAR 3 AND FAR PART 21, SUBPART J. THIS HANDBOOK INCLUDES THE MATERIAL REQUIRED TO BE FURNISHED TO THE PILOT BY CAR 3 AND FAR PART 21, SUBPART J AND MUST BE CARRIED IN THE AIRPLANE AT ALL TIMES.

AIRPLANE SERIAL NO. \_\_\_\_\_

AIRPLANE REGISTRATION NO. \_\_\_\_\_

PA-28-181  
REPORT: VB-760

FAA APPROVED BY: Ward Evans  
WARD EVANS  
D.O.A. NO. SO-1  
PIPER AIRCRAFT CORPORATION  
VERO BEACH, FLORIDA

DATE OF APPROVAL: AUGUST 15, 1975



WARNING

EXTREME CARE MUST BE EXERCISED TO LIMIT THE USE OF THIS MANUAL TO APPLICABLE AIRCRAFT. THIS MANUAL REVISED AS INDICATED BELOW OR SUBSEQUENTLY REVISED IS VALID FOR USE WITH THE AIRPLANE IDENTIFIED ON THE FACE OF THE TITLE PAGE WHEN OFFICIALLY APPROVED. SUBSEQUENT REVISIONS SUPPLIED BY PIPER AIRCRAFT CORPORATION MUST BE PROPERLY INSERTED.

MODEL PA-28-181, CHEROKEE ARCHER II

PILOT'S OPERATING HANDBOOK, REPORT: VB-760 REVISION \_\_\_\_\_

PIPER AIRCRAFT CORPORATION  
APPROVAL SIGNATURE AND STAMP \_\_\_\_\_

Published by  
PUBLICATIONS DEPARTMENT  
Piper Aircraft Corporation  
Issued: August 15, 1975

## **APPLICABILITY**

The aircraft serial number eligibility bracket for application of this handbook is 28-7690001 through 28-7690467. The specific application of this handbook is limited to the Piper PA-28-181 model airplane designated by serial number and registration number on the face of the title page of this handbook.

This handbook cannot be used for operational purposes unless kept in a current status.

## **REVISIONS**

The information compiled in the Pilot's Operating Handbook will be kept current by revisions distributed to the airplane owners.

Revision material will consist of information necessary to update the text of the present handbook and/or to add information to cover added airplane equipment.

### **I. Revisions**

Revisions will be distributed whenever necessary as complete page replacements or additions and shall be inserted into the handbook in accordance with the instructions given below:

1. Revision pages will replace only pages with the same page number.
2. Insert all additional pages in proper numerical order within each section.
3. Page numbers followed by a small letter shall be inserted in direct sequence with the same common numbered page.

### **II. Identification of Revised Material**

Revised text and illustrations shall be indicated by a black vertical line along the outside margin of the page, opposite revised, added or deleted material. A line along the outside margin of the page opposite the page number will indicate that an entire page was added.

Black lines will indicate only current revisions with changes and additions to or deletions of existing text and illustrations. Changes in capitalization, spelling, punctuation or the physical location of material on a page will not be identified.

## **ORIGINAL PAGES ISSUED**

The original pages issued for this handbook prior to revision are given below:

Title, ii through v, 1-1 through 1-14, 2-1 through 2-8, 3-1 through 3-12, 4-1 through 4-16, 5-1 through 5-26, 6-1 through 6-52, 7-1 through 7-26, 8-1 through 8-16, 9-1 through 9-14, 10-1 through 10-2.


# PILOT'S OPERATING HANDBOOK LOG OF REVISIONS

Current Revisions to the PA-28-181 Cherokee Archer II Pilot's Operating Handbook, REPORT: VB-760 issued August 15, 1975.

| Revision Number and Code    | Revised Pages                                                                                                                         | Description of Revision                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | FAA Approval Signature and Date                  |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
| Rev. 1 - 761 619 (PR760106) | 6-i<br>6-37<br>6-44<br>6-46<br>7-25<br>8-5                                                                                            | Revised wording of 6.9 (a).<br>Removed Piper Dwg. No. from item 155.<br>Added items 236 and 238.<br>Revised item 263.<br>Revised ELT pilot's remote switch info.<br>Revised 8.7 (a), items (1), (2), and (3).                                                                                                                                                                                                                                                                                                                                                                                                                               | <i>Ward Evans</i><br>Ward Evans<br>Jan. 6, 1976  |
| Rev. 2 - 761 619 (PR761112) | 3-3<br>3-8<br>3-9<br>4-14<br>5-4<br>5-9<br>5-13<br>5-14<br>5-14a<br>5-14b<br>5-25<br>5-26<br>6-35<br>6-36<br><br>6-46<br>7-24<br>7-25 | Revised checklist.<br>Revised wording of 3.11.<br>Revised 3.15 info.<br>Revised approach speed in 4.29.<br>Revised takeoff performance.<br>Added Fig. 5-6, 5-8, and 5-30.<br>Revised Fig. 5-5.<br>Added Fig. 5-6 (Flaps Up Ground Roll).<br>Added page (added revised Fig. 5-7).<br>Added page (added Fig. 5-8 - 25° Ground Roll).<br>Revised Fig. 5-29.<br>Added Fig. 5-30 (Landing Ground Roll).<br>Added items 114 and 116.<br>Relocated items 127 and 129, added items 131 and 133.<br>Added PAL transmitter item 263 (c), revised item 263 (c) to 263 (d).<br>Revised ELT transmitter info.<br>Revised ELT pilot's remote switch info. | <i>Ward Evans</i><br>Ward Evans<br>Nov. 12, 1976 |
| Rev. 3 - 761 619 (PR770601) | 4-1<br>4-4<br>4-9                                                                                                                     | Revised item 4.3 (c).<br>Revised Starting Engine When Hot.<br>Revised item 4.13 (b)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | <i>Ward Evans</i><br>Ward Evans<br>June 1, 1977  |
| Rev. 4 - 761 619 (PR790316) | iii<br>1-4<br>4-5<br>5-5<br>5-14<br>5-14b<br>6-1<br>6-3<br>7-10                                                                       | Added serial no. effectivity.<br>Revised para. 1.13 and footnote.<br>Revised para. 4.5.<br>Revised para. 5.5.<br>Revised Fig. 5-6.<br>Revised Fig. 5-8.<br>Revised para. 6.1.<br>Added Caution to para. 6.3.<br>Added Warning to para. 7.15.                                                                                                                                                                                                                                                                                                                                                                                                |                                                  |



# PILOT'S OPERATING HANDBOOK LOG OF REVISIONS (cont)

| Revision Number and Code                 | Revised Pages | Description of Revision                                                                    | FAA Approval Signature and Date                                                                                       |
|------------------------------------------|---------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| Rev. 4 - 761 619<br>(PR790316)<br>(cont) | 7-11          | Revised para 7.15.                                                                         | <br>Ward Evans<br>March 16, 1979   |
|                                          | 7-21          | Added Caution to para. 7.23.                                                               |                                                                                                                       |
|                                          | 7-24          | Revised para. 7.37.                                                                        |                                                                                                                       |
|                                          | 8-13          | Added Caution to para. 8.21; relocated info to pg. 8-14.                                   |                                                                                                                       |
|                                          | 8-14          | Added info. from pg. 8-13; relocated info. to pg. 8-15.                                    |                                                                                                                       |
|                                          | 8-15          | Added info. from pg. 8-14.                                                                 |                                                                                                                       |
| Rev. 5 - 761 619<br>(PR900608)           | 1-3           | Revised para. 1.9, item (c).                                                               | <br>D.H. Trompler<br>July 30, 1990 |
|                                          | 8-1           | Revised para. 8.1.                                                                         |                                                                                                                       |
|                                          | 8-3           | Revised para. 8.3.                                                                         |                                                                                                                       |
|                                          | 8-4           | Revised para. 8.5.                                                                         |                                                                                                                       |
|                                          | 8-11          | Revised para 8.19. Revised para. 8.21, item b. Relocated para. 8.21, item (c) to pg. 8-12. |                                                                                                                       |
|                                          | 8-11a         | Added page.                                                                                |                                                                                                                       |
|                                          | 8-11b         | Added page. Added Fuel Comparison Chart.                                                   |                                                                                                                       |
|                                          | 8-12          | Added info. to para. 8.21, item (b).<br>Added relocated para. 8.21, item (c) from pg. 8-11 |                                                                                                                       |

# **TABLE OF CONTENTS**

|                   |                                                                      |
|-------------------|----------------------------------------------------------------------|
| <b>SECTION 1</b>  | <b>GENERAL</b>                                                       |
| <b>SECTION 2</b>  | <b>LIMITATIONS</b>                                                   |
| <b>SECTION 3</b>  | <b>EMERGENCY PROCEDURES</b>                                          |
| <b>SECTION 4</b>  | <b>NORMAL PROCEDURES</b>                                             |
| <b>SECTION 5</b>  | <b>PERFORMANCE</b>                                                   |
| <b>SECTION 6</b>  | <b>WEIGHT AND BALANCE</b>                                            |
| <b>SECTION 7</b>  | <b>DESCRIPTION AND OPERATION OF THE<br/>AIRPLANE AND ITS SYSTEMS</b> |
| <b>SECTION 8</b>  | <b>AIRPLANE HANDLING, SERVICING AND<br/>MAINTENANCE</b>              |
| <b>SECTION 9</b>  | <b>SUPPLEMENTS</b>                                                   |
| <b>SECTION 10</b> | <b>SAFETY TIPS</b>                                                   |

## TABLE OF CONTENTS

### SECTION 1

#### GENERAL

| Paragraph<br>No. |                                             | Page<br>No. |
|------------------|---------------------------------------------|-------------|
| 1.1              | Introduction .....                          | 1-1         |
| 1.3              | Engines .....                               | 1-3         |
| 1.5              | Propellers .....                            | 1-3         |
| 1.7              | Fuel .....                                  | 1-3         |
| 1.9              | Oil .....                                   | 1-3         |
| 1.11             | Maximum Weights .....                       | 1-4         |
| 1.13             | Standard Airplane Weights .....             | 1-4         |
| 1.15             | Baggage Space .....                         | 1-4         |
| 1.17             | Specific Loadings.....                      | 1-4         |
| 1.19             | Symbols, Abbreviations and Terminology..... | 1-5         |
| 1.21             | Conversion Factors .....                    | 1-11        |

## **SECTION 1**

### **GENERAL**

#### **1.1 INTRODUCTION**


This Pilot's Operating Handbook is designed for maximum utilization as an operating guide for the pilot. It includes the material required to be furnished to the pilot by C.A.R. 3 and FAR Part 21, Subpart J. It also contains supplemental data supplied by the airplane manufacturer.

This handbook is not designed as a substitute for adequate and competent flight instruction, knowledge of current airworthiness directives, applicable federal air regulations or advisory circulars. It is not intended to be a guide for basic flight instruction or a training manual and should not be used for operational purposes unless kept in a current status.

Assurance that the airplane is in an airworthy condition is the responsibility of the owner. The pilot in command is responsible for determining that the airplane is safe for flight. The pilot is also responsible for remaining within the operating limitations as outlined by instrument markings, placards, and this handbook.

Although the arrangement of this handbook is intended to increase its in-flight capabilities, it should not be used solely as an occasional operating reference. The pilot should study the entire handbook to familiarize himself with the limitations, performance, procedures and operational handling characteristics of the airplane before flight.

The handbook has been divided into numbered (arabic) sections, each provided with a "finger-tip" tab divider for quick reference. The limitations and emergency procedures have been placed ahead of the normal procedures, performance and other sections to provide easier access to information that may be required in flight. The "Emergency Procedures" Section has been furnished with a red tab divider to present an instant reference to the section. Provisions for expansion of the handbook have been made by the deliberate omission of certain paragraph numbers, figure numbers, item numbers and pages noted as being left blank intentionally.

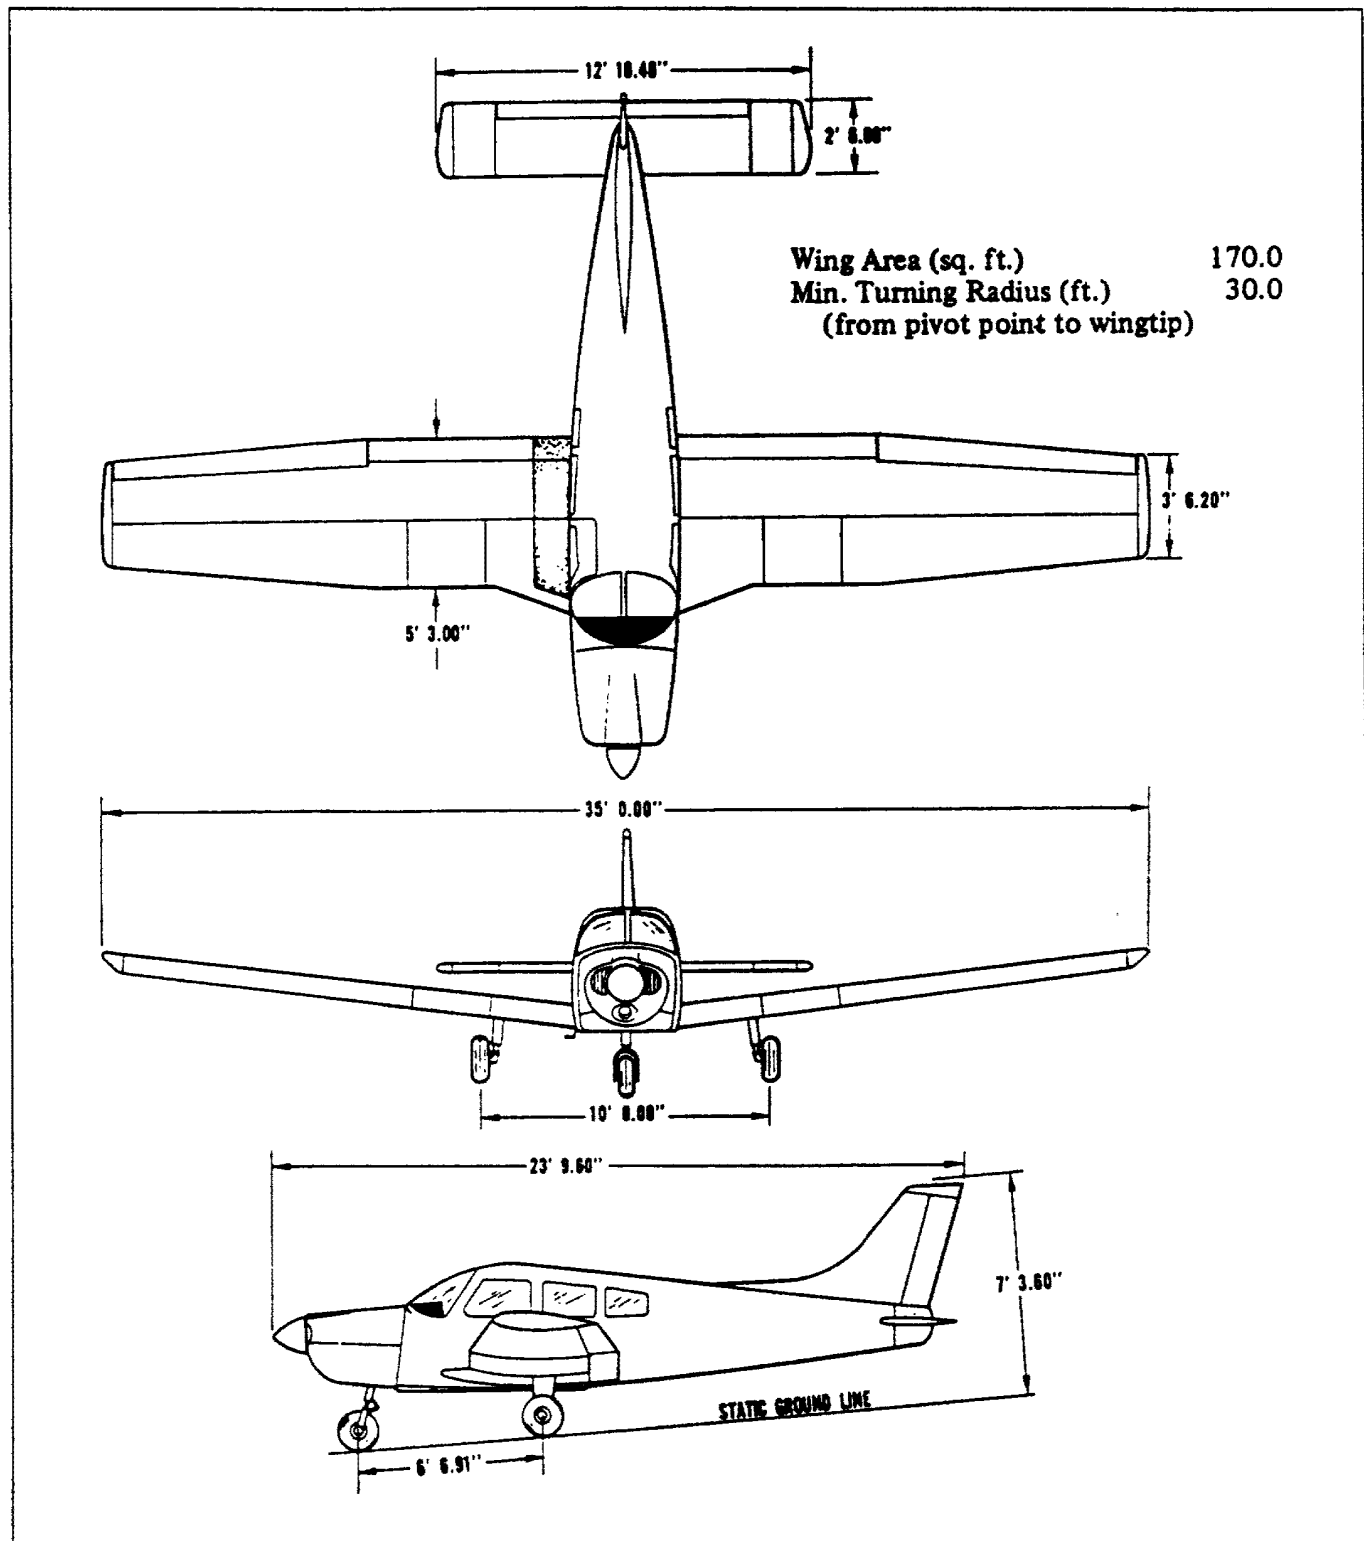

THREE VIEW

Figure 1-1

### 1.3 ENGINES

|                                 |                                                                 |
|---------------------------------|-----------------------------------------------------------------|
| (a) Number of Engines           | 1                                                               |
| (b) Engine Manufacturer         | Lycoming                                                        |
| (c) Engine Model Number         | O-360-A4M                                                       |
| (d) Rated Horsepower            | 180                                                             |
| (e) Rated Speed (rpm)           | 2700                                                            |
| (f) Bore (inches)               | 5.125                                                           |
| (g) Stroke (inches)             | 4.375                                                           |
| (h) Displacement (cubic inches) | 361.0                                                           |
| (i) Compression Ratio           | 8.5:1                                                           |
| (j) Engine Type                 | Four Cylinder, Direct Drive<br>Horizontally Opposed, Air Cooled |

### 1.5 PROPELLERS

|                                 |              |
|---------------------------------|--------------|
| (a) Number of Propellers        | 1            |
| (b) Propeller Manufacturer      | Sensenich    |
| (c) Model                       | 76EM8S5-0-60 |
| (d) Number of Blades            | 2            |
| (e) Propeller Diameter (inches) |              |
| (1) Maximum                     | 76           |
| (2) Minimum                     | 76           |
| (f) Propeller Type              | Fixed Pitch  |

### 1.7 FUEL

#### AVGAS ONLY

|                                        |               |
|----------------------------------------|---------------|
| (a) Fuel Capacity (U.S. gal.) (total)  | 50            |
| (b) Usable Fuel. (U.S. gal.) (total)   | 48            |
| (c) Fuel Grade, Aviation (min. octane) | 100/130 Green |

### 1.9 OIL

|                                                          |                                                            |
|----------------------------------------------------------|------------------------------------------------------------|
| (a) Oil Capacity (U.S. Quarts)                           | 8                                                          |
| (b) Oil Specification                                    | Refer to latest issue of<br>Lycoming Instruction No. 1014. |
| (c) Oil Viscosity per Average Ambient Temp. for Starting |                                                            |

|                      | MIL-L-6082B<br>Mineral<br>SAE Grade | MIL-L-22851<br>Ashless Dispersant<br>SAE Grades |
|----------------------|-------------------------------------|-------------------------------------------------|
| (1) All Temperatures |                                     | 15W-50 or 20W-50                                |
| (2) Above 80°F       | 60                                  | 60                                              |
| (3) Above 60°F       | 50                                  | 40 or 50                                        |
| (4) 30°F to 90°F     | 40                                  | 40                                              |
| (5) 0°F to 70°F      | 30                                  | 30, 40 or 20W-40                                |
| (6) 0°F to 90°F      | 20W-50                              | 20W-50 or 15W-50                                |
| (7) Below 10°F       | 20                                  | 30 or 20W-30                                    |

When operating temperatures overlap indicated ranges, use the lighter grade oil.

### 1.11 MAXIMUM WEIGHTS

|                                            | NORMAL | UTILITY |
|--------------------------------------------|--------|---------|
| (a) Maximum Takeoff Weight (lbs)           | 2550   | 1950    |
| (b) Maximum Landing Weight (lbs)           | 2550   | 1950    |
| (c) Maximum Weights in Baggage Compartment | 200    | 0       |

### 1.13 STANDARD AIRPLANE WEIGHTS\*

|                                                                                                                            |      |
|----------------------------------------------------------------------------------------------------------------------------|------|
| (a) Standard Empty Weight (lbs): Weight of a standard airplane including unusable fuel, full operating fluids and full oil | 1390 |
| (b) Maximum Useful Load (lbs): The difference between the Maximum Takeoff Weight and the Standard Empty Weight             | 1160 |

### 1.15 BAGGAGE SPACE

|                                     |    |
|-------------------------------------|----|
| (a) Compartment Volume (cubic feet) | 24 |
| (b) Entry Width (inches)            | 22 |
| (c) Entry Height (inches)           | 20 |

### 1.17 SPECIFIC LOADINGS

|                                  |      |
|----------------------------------|------|
| (a) Wing Loading (lbs per sq ft) | 15.0 |
| (b) Power Loading (lbs per hp)   | 14.2 |

\*These values are approximate and may vary from one aircraft to another. Refer to Figure 6-5 for the Standard Empty Weight value and Useful Load value to be used for C.G. calculation for the aircraft specified.

## 1.19 SYMBOLS, ABBREVIATIONS AND TERMINOLOGY

The following definitions are of symbols, abbreviations and terminology used throughout the handbook and those which may be of added operational significance to the pilot.

### (a) General Airspeed Terminology and Symbols

|                 |                                                                                                                                                                                               |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CAS             | Calibrated Airspeed means the indicated speed of an aircraft, corrected for position and instrument error. Calibrated airspeed is equal to true airspeed in standard atmosphere at sea level. |
| KCAS            | Calibrated Airspeed expressed in "Knots."                                                                                                                                                     |
| GS              | Ground Speed is the speed of an airplane relative to the ground.                                                                                                                              |
| IAS             | Indicated Airspeed is the speed of an aircraft as shown on the airspeed indicator when corrected for instrument error. IAS values published in this handbook assume zero instrument error.    |
| KIAS            | Indicated Airspeed expressed in "Knots."                                                                                                                                                      |
| M               | Mach Number is the ratio of true airspeed to the speed of sound.                                                                                                                              |
| TAS             | True Airspeed is the airspeed of an airplane relative to undisturbed air which is the CAS corrected for altitude, temperature and compressability.                                            |
| $V_A$           | Maneuvering Speed is the maximum speed at which application of full available aerodynamic control will not overstress the airplane.                                                           |
| $V_{FE}$        | Maximum Flap Extended Speed is the highest speed permissible with wing flaps in a prescribed extended position.                                                                               |
| $V_{NE}/M_{NE}$ | Never Exceed Speed or Mach Number is the speed limit that may not be exceeded at any time.                                                                                                    |
| $V_{NO}$        | Maximum Structural Cruising Speed is the speed that should not be exceeded except in smooth air and then only with caution.                                                                   |
| $V_S$           | Stalling Speed or the minimum steady flight speed at which the airplane is controllable.                                                                                                      |
| $V_{SO}$        | Stalling Speed or the minimum steady flight speed at which the airplane is controllable in the landing configuration.                                                                         |
| $V_X$           | Best Angle-of-Climb Speed is the airspeed which delivers the greatest gain of altitude in the shortest possible horizontal distance.                                                          |
| $V_Y$           | Best Rate-of-Climb Speed is the airspeed which delivers the greatest gain in altitude in the shortest possible time.                                                                          |



(b) Meteorological Terminology

|                             |                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ISA                         | International Standard Atmosphere in which:<br>The air is a dry perfect gas;<br>The temperature at sea level is 15° Celcius (59 ° Fahrenheit);<br>The pressure at sea level is 29.92 inches hg. (1013 mb);<br>The temperature gradient from sea level to the altitude at which the temperature is -56.5°C (-69.7°F) is -0.00198°C (-0.003566°F) per foot and zero above that altitude. |
| OAT                         | Outside Air Temperature is the free air static temperature, obtained either from inflight temperature indications or ground meteorological sources, adjusted for instrument error and compressibility effects.                                                                                                                                                                         |
| Indicated Pressure Altitude | The number actually read from an altimeter when the barometric subscale has been set to 29.92 inches of mercury (1013 millibars).                                                                                                                                                                                                                                                      |
| Pressure Altitude           | Altitude measured from standard sea-level pressure (29.92 in. Hg) by a pressure or barometric altimeter. It is the indicated pressure altitude corrected for position and instrument error. In this handbook, altimeter instrument errors are assumed to be zero.                                                                                                                      |
| Station Pressure            | Actual atmospheric pressure at field elevation.                                                                                                                                                                                                                                                                                                                                        |
| Wind                        | The wind velocities recorded as variables on the charts of this handbook are to be understood as the headwind or tailwind components of the reported winds.                                                                                                                                                                                                                            |

**(c) Power Terminology (Specific)**

|                          |                                         |
|--------------------------|-----------------------------------------|
| Takeoff Power            | Maximum Rated Power (180 HP @ 2700 RPM) |
| Maximum Continuous Power | Maximum Rated Power (180 HP @ 2700 RPM) |
| Maximum Climb Power      | Maximum Rated Power (180 HP @ 2700 RPM) |
| Maximum Cruise Power     | Maximum Rated Power (180 HP @ 2700 RPM) |
| Flight Idle Power        | Throttle Closed                         |
| Ground Idle Power        | Throttle Closed                         |

**(d) Engine Instruments**

|           |                               |
|-----------|-------------------------------|
| EGT Gauge | Exhaust Gas Temperature Gauge |
|-----------|-------------------------------|

**(e) Airplane Performance and Flight Planning Terminology**

|                                 |                                                                                                                                                                                                            |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Climb Gradient                  | The demonstrated ratio of the change in height during a portion of a climb, to the horizontal distance traversed in the same time interval.                                                                |
| Demonstrated Crosswind Velocity | The demonstrated crosswind velocity is the velocity of the crosswind component for which adequate control of the airplane during takeoff and landing was actually demonstrated during certification tests. |
| Accelerate-Stop Distance        | The distance required to accelerate an airplane to a specified speed and, assuming failure of an engine at the instant that speed is attained, to bring the airplane to a stop.                            |
| MEA                             | Minimum en route IFR altitude.                                                                                                                                                                             |
| Route Segment                   | A part of a route. Each end of that part is identified by: (1) a geographical location; or (2) a point at which a definite radio fix can be established.                                                   |

**(f) Weight and Balance Terminology**

|                             |                                                                                                                                                                             |
|-----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reference Datum             | An imaginary vertical plane from which all horizontal distances are measured for balance purposes.                                                                          |
| Station                     | A location along the airplane fuselage usually given in terms of distance from the reference datum.                                                                         |
| Arm                         | The horizontal distance from the reference datum to the center of gravity (C.G.) of an item.                                                                                |
| Moment                      | The product of the weight of an item multiplied by its arm. (Moment divided by a constant is used to simplify balance calculations by reducing the number of digits.)       |
| Center of Gravity<br>(C.G.) | The point at which an airplane would balance if suspended. Its distance from the reference datum is found by dividing the total moment by the total weight of the airplane. |
| C.G. Arm                    | The arm obtained by adding the airplane's individual moments and dividing the sum by the total weight.                                                                      |
| C.G. Limits                 | The extreme center of gravity locations within which the airplane must be operated at a given weight.                                                                       |
| Usable Fuel                 | Fuel available for flight planning.                                                                                                                                         |
| Unusable Fuel               | Fuel remaining after a runout test has been completed in accordance with governmental regulations.                                                                          |
| Standard Empty Weight       | Weight of a standard airplane including unusable fuel, full operating fluids and full oil.                                                                                  |
| Basic Empty Weight          | Standard empty weight plus optional equipment.                                                                                                                              |
| Payload                     | Weight of occupants, cargo and baggage.                                                                                                                                     |
| Useful Load                 | Difference between takeoff weight, or ramp weight if applicable, and basic empty weight.                                                                                    |
| Maximum Ramp Weight         | Maximum weight approved for ground maneuver. (It includes weight of start, taxi and run up fuel.)                                                                           |
| Maximum Takeoff<br>Weight   | Maximum weight approved for the start of the takeoff run.                                                                                                                   |
| Maximum Landing<br>Weight   | Maximum weight approved for the landing touchdown.                                                                                                                          |
| Maximum Zero Fuel<br>Weight | Maximum weight exclusive of usable fuel.                                                                                                                                    |

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

## 1.21 CONVERSION FACTORS

| <u>MULTIPLY</u> | <u>BY</u>                                                                           | <u>TO OBTAIN</u>                                                   | <u>MULTIPLY</u>  | <u>BY</u>                                                                                            | <u>TO OBTAIN</u>                                      |
|-----------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------|------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| atmospheres     | 76.00<br>29.92<br>14.696<br>21,116<br>1.033                                         | cm Hg at 0°C<br>in. Hg at 0°C<br>lb/sq in.<br>lb/sq ft<br>kg/sq cm | feet             | $3.048 \times 10^{-1}$<br>$3.333 \times 10^{-1}$<br>$1.894 \times 10^{-4}$<br>$1.646 \times 10^{-4}$ | meters<br>yards<br>miles<br>nautical miles            |
| centimeters     | 0.3937<br>$3.281 \times 10^{-2}$                                                    | in.<br>ft                                                          | ft/min           | $1.136 \times 10^{-2}$<br>$1.829 \times 10^{-2}$<br>$5.080 \times 10^{-1}$                           | mph<br>km/hr<br>cm/sec                                |
| cm Hg           | $1.934 \times 10^{-1}$<br>27.85<br>135.95                                           | lb/sq in.<br>lb/sq ft<br>kg/sq m                                   | ft/sec           | .6818<br>1.097<br>30.48<br>.5925                                                                     | mph<br>km/hr<br>cm/sec<br>knots                       |
| cm/second       | $3.281 \times 10^{-2}$<br>$2.237 \times 10^{-2}$                                    | ft/sec<br>mph                                                      | ft/lb            | $1.383 \times 10^{-1}$                                                                               | m-kg                                                  |
| cu centimeters  | $10^{-3}$<br>$6.102 \times 10^{-2}$<br>$2.642 \times 10^{-4}$                       | liters<br>cu in.<br>U.S. gal                                       | ft-lb/min        | $3.030 \times 10^{-5}$                                                                               | hp                                                    |
| cu ft           | $2.832 \times 10^{-4}$<br>1,728<br>$3.704 \times 10^{-2}$<br>7.481<br>28.32         | cu cm<br>cu in.<br>cu yards<br>U.S. gal<br>liters                  | ft-lb/sec        | $1.818 \times 10^{-3}$                                                                               | hp                                                    |
| cu ft/min       | $4.719 \times 10^{-1}$<br>$2.832 \times 10^{-2}$                                    | liters/sec<br>cu m/min                                             | fluid oz         | 8<br>29.6                                                                                            | dram<br>cu cm                                         |
| cu in.          | 16.39<br>$1.639 \times 10^{-2}$<br>$4.329 \times 10^{-3}$<br>$1.732 \times 10^{-2}$ | cu cm<br>liters<br>U.S. gal<br>quarts                              | gal, Imperial    | 277.4<br>1.201<br>4.546                                                                              | cu in.<br>U.S. gal<br>liters                          |
| cu meters       | 61.023<br>1.308<br>35.31<br>264.2                                                   | cu in.<br>cu yards<br>cu ft<br>U.S. gal                            | gal, U.S. dry    | 268.8<br>$1.556 \times 10^{-1}$<br>1.164<br>4.405                                                    | cu in.<br>cu ft<br>U.S. gal liquid<br>liters          |
| cu yards        | 27.0<br>$7.646 \times 10^{-1}$<br>$2.022 \times 10^{-2}$                            | cu ft<br>cu meters<br>U.S. gal                                     | gal, U.S. liquid | 231.0<br>$1.337 \times 10^{-1}$<br>3.785<br>$8.327 \times 10^{-1}$<br>$1.280 \times 10^{-2}$         | cu in.<br>cu ft<br>liters<br>Imperial gal<br>fluid oz |
| deg (arc)       | $1.745 \times 10^{-2}$                                                              | radians                                                            | grams/cm         | 0.1<br>$6.721 \times 10^{-2}$<br>$5.601 \times 10^{-3}$                                              | kg/m<br>lb/ft<br>lb/in.                               |
|                 |                                                                                     |                                                                    | grams/cu cm      | 1,000<br>62.43                                                                                       | kg/cu m<br>lb/cu ft                                   |

**SECTION 1  
GENERAL**

**PIPER AIRCRAFT CORPORATION  
PA-28-181, CHEROKEE ARCHER II**

| <u>MULTIPLY</u>    | <u>BY</u>                                                                                            | <u>TO OBTAIN</u>                                | <u>MULTIPLY</u> | <u>BY</u>                                                                                              | <u>TO OBTAIN</u>                                               |
|--------------------|------------------------------------------------------------------------------------------------------|-------------------------------------------------|-----------------|--------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| horsepower         | 33,000<br>550<br>76.04<br>1.014                                                                      | ft-lb/min<br>ft-lb/sec<br>m-kg/sec<br>metric hp | liters          | $10^3$<br>61.03<br>$3.532 \times 10^{-2}$<br>$2.642 \times 10^{-1}$<br>$2.200 \times 10^{-1}$<br>1.057 | cu cm<br>cu in.<br>cu ft<br>U.S. gal<br>Imperial gal<br>quarts |
| horsepower, metric | 75.0<br>$9.863 \times 10^{-1}$                                                                       | m-kg/sec<br>hp                                  | meters          | 39.37<br>3.281<br>1.094<br>$6.214 \times 10^{-4}$                                                      | in.<br>ft<br>yards<br>miles                                    |
| inches             | 2.540<br>$83.33 \times 10^{-3}$                                                                      | cm<br>ft                                        | meter-kilogram  | 7.233                                                                                                  | ft-lb                                                          |
| in. Hg at 0 C      | $3.342 \times 10^{-2}$<br>$4.912 \times 10^{-1}$<br>70.73<br>$3.453 \times 10^{-2}$                  | atmospheres<br>lb/sq in.<br>lb/sq ft<br>kg/sq m | meter/sec       | 3.281<br>2.237<br>3.600                                                                                | ft/sec<br>miles/hr<br>km/hr                                    |
| kilograms          | 2.205<br>35.27<br>$10^3$                                                                             | lb<br>oz<br>grams                               | microns         | $3.937 \times 10^{-5}$                                                                                 | in.                                                            |
| kg-calories        | 3087<br>$4.269 \times 10^{-2}$                                                                       | ft-lb<br>m-kg                                   | miles           | 5280<br>1.609<br>$8.690 \times 10^{-1}$                                                                | ft<br>km<br>nautical miles                                     |
| kg/cu m            | $62.43 \times 10^{-3}$<br>$10^{-3}$                                                                  | lb/cu ft<br>grams/cu m                          | mph             | 1.467<br>$4.470 \times 10^{-1}$<br>1.609<br>$8.690 \times 10^{-1}$                                     | ft/sec<br>m/sec<br>km/hr<br>knots                              |
| kg/sq cm           | 14.22<br>$2.048 \times 10^{-3}$<br>28.96                                                             | lb/cu ft<br>lb/sq ft<br>in. Hg at 0°C           | miles/hr sq     | 2.151                                                                                                  | ft/sec sq                                                      |
| kilometers         | $3.281 \times 10^{-3}$<br>$6.214 \times 10^{-1}$<br>$5.400 \times 10^{-1}$<br>$10^{-5}$              | ft<br>miles<br>nautical miles<br>centimeters    | millibars       | $2.953 \times 10^{-2}$                                                                                 | in. Hg at 0 C                                                  |
| km/hr              | $9.113 \times 10^{-1}$<br>$5.396 \times 10^{-1}$<br>$6.214 \times 10^{-1}$<br>$2.778 \times 10^{-1}$ | ft/sec<br>knots<br>mph<br>m/sec                 | nautical miles  | 6076.1<br>1.151<br>1852                                                                                | ft<br>miles<br>m                                               |
| knots              | 1.0<br>1.688<br>1.151<br>1.853<br>$5.148 \times 10^{-1}$                                             | nautical mph<br>ft/sec<br>mph<br>km/hr<br>m/sec | ounces, fluid   | 29.57<br>1.805                                                                                         | cu cm<br>cu in.                                                |
|                    |                                                                                                      |                                                 | lb/cu ft        | 16.02                                                                                                  | kg/cu m                                                        |
|                    |                                                                                                      |                                                 | lb/cu in.       | 1728<br>27.68                                                                                          | lb/cu ft<br>grams/cu cm                                        |

| <u>MULTIPLY</u> | <u>BY</u>                                                          | <u>TO OBTAIN</u>                        |
|-----------------|--------------------------------------------------------------------|-----------------------------------------|
| lb/sq in.       | 2.036<br>$6.805 \times 10^{-2}$<br>$7.031 \times 10^2$             | in. Hg at 0°C<br>atmospheres<br>kg/sq m |
| radians         | 57.30                                                              | deg (arc)                               |
| radians/sec     | 57.30<br>$15.92 \times 10^{-2}$<br>9.549                           | deg/sec<br>rev/sec<br>rev/min           |
| revolutions     | 6.283                                                              | radians                                 |
| rev/min         | $1.047 \times 10^{-1}$                                             | radians/sec                             |
| rod             | 16.5<br>5.5                                                        | ft<br>yd                                |
| slug            | 32.174                                                             | lb                                      |
| sq cm           | $1.550 \times 10^{-1}$<br>$1.076 \times 10^{-3}$                   | sq in.<br>sq ft                         |
| sq ft           | 929.0<br>144.0<br>$1.111 \times 10^{-1}$<br>$2.296 \times 10^{-5}$ | sq cm<br>sq in.<br>sq yards<br>acres    |
| sq in.          | 6.452                                                              | sq cm                                   |
| sq kilometers   | $3.861 \times 10^{-1}$                                             | sq miles                                |
| sq meters       | 10.76<br>1.196                                                     | sq ft<br>sq yards                       |
| sq miles        | 2.590<br>640                                                       | sq km<br>acres                          |
| sq rods         | 30.25                                                              | sq yd                                   |
| sq yards        | $8.361 \times 10^{-1}$<br>9                                        | sq m<br>sq ft                           |
| yards           | $9.144 \times 10^{-1}$<br>3.0<br>36.0                              | meters<br>ft<br>in.                     |



THIS PAGE INTENTIONALLY LEFT BLANK

## **TABLE OF CONTENTS**

### **SECTION 2**

#### **LIMITATIONS**

| <b>Paragraph<br/>No.</b> |                                       | <b>Page<br/>No.</b> |
|--------------------------|---------------------------------------|---------------------|
| 2.1                      | General .....                         | 2-1                 |
| 2.3                      | Airspeed Limitations.....             | 2-1                 |
| 2.5                      | Airspeed Indicator Markings .....     | 2-2                 |
| 2.7                      | Power Plant Limitations.....          | 2-2                 |
| 2.9                      | Power Plant Instrument Markings ..... | 2-3                 |
| 2.11                     | Weight Limits.....                    | 2-3                 |
| 2.13                     | Center of Gravity Limits.....         | 2-4                 |
| 2.15                     | Maneuver Limits.....                  | 2-4                 |
| 2.17                     | Flight Load Factors .....             | 2-4                 |
| 2.19                     | Types of Operations .....             | 2-5                 |
| 2.21                     | Fuel Limitations .....                | 2-5                 |
| 2.23                     | Placards .....                        | 2-7                 |

SECTION 2  
LIMITATIONS

2.1 GENERAL

This section provides the "FAA Approved" operating limitations, instrument markings, color coding and basic placards necessary for the safe operation of the airplane and its systems.

Limitations associated with those optional systems and equipment which require handbook supplements can be found in Section 9 (Supplements).

2.3 AIRSPEED LIMITATIONS

| SPEED                                                                                                                      | CAS               |
|----------------------------------------------------------------------------------------------------------------------------|-------------------|
| Never Exceed Speed ( $V_{NE}$ ) - Do not exceed this speed in any operation.                                               | 171 MPH (148 KTS) |
| Maximum Structural Cruising Speed ( $V_{NO}$ ) - Do not exceed this speed except in smooth air and then only with caution. | 140 MPH (121 KTS) |
| Design Maneuvering Speed ( $V_A$ ) - Do not make full or abrupt control movements above this speed.                        | 124 MPH (108 KTS) |
| Maximum Flaps Extended Speed ( $V_{FE}$ ) - Do not exceed this speed with the flaps extended.                              | 115 MPH (100 KTS) |

**SECTION 2  
LIMITATIONS**

**PIPER AIRCRAFT CORPORATION  
PA-28-181, CHEROKEE ARCHER II**

**2.5 AIRSPEED INDICATOR MARKINGS**

| MARKING                                      | CAS                                        |
|----------------------------------------------|--------------------------------------------|
| Red Radial Line (Never Exceed)               | 171 MPH (148 KTS)                          |
| Yellow Arc (Caution Range - Smooth Air Only) | 140 MPH to 171 MPH<br>(121 KTS to 148 KTS) |
| Green Arc (Normal Operating Range)           | 68 MPH to 140 MPH<br>(59 KTS to 121 KTS)   |
| White Arc (Flap Down)                        | 61 MPH to 115 MPH<br>(53 KTS to 100 KTS)   |

**2.7 POWER PLANT LIMITATIONS**

|                                                                                 |                                              |
|---------------------------------------------------------------------------------|----------------------------------------------|
| (a) Number of Engines                                                           | 1                                            |
| (b) Engine Manufacturer                                                         | Lycoming                                     |
| (c) Engine Model No.                                                            | O-360-A4M with<br>carburetor setting 10-3878 |
| (d) Engine Operating Limits                                                     |                                              |
| (1) Maximum Horsepower                                                          | 180                                          |
| (2) Maximum Rotation Speed (RPM)                                                | 2700                                         |
| (3) Maximum Oil Temperature                                                     | 245°F                                        |
| (e) Oil Pressure                                                                |                                              |
| Minimum (red line)                                                              | 25 PSI                                       |
| Maximum (red line)                                                              | 90 PSI                                       |
| (f) Fuel Pressure                                                               |                                              |
| Minimum (red line)                                                              | .5 PSI                                       |
| Maximum (red line)                                                              | 8 PSI                                        |
| (g) Fuel Grade (minimum octane)                                                 | 100/130 - Green                              |
| (h) Number of Propellers                                                        | 1                                            |
| (i) Propeller Manufacturer                                                      | Sensenich                                    |
| (j) Propeller Model                                                             | 76EM8S5-0-60                                 |
| (k) Propeller Diameter                                                          |                                              |
| Minimum                                                                         | 76 IN.                                       |
| Maximum                                                                         | 76 IN.                                       |
| (l) Propeller Tolerance (static RPM at maximum<br>permissible throttle setting) | Not above 2425 RPM<br>Not below 2325 RPM     |

No additional tolerance permitted.

## 2.9 POWER PLANT INSTRUMENT MARKINGS

|     |                                     |                  |
|-----|-------------------------------------|------------------|
| (a) | Tachometer                          |                  |
|     | Green Arc (Normal Operating Range)  | 500 to 2700 RPM  |
|     | Red Line (Maximum Continuous Power) | 2700 RPM         |
| (b) | Oil Temperature                     |                  |
|     | Green Arc (Normal Operating Range)  | 75° to 245°F     |
|     | Red Line (Maximum)                  | 245°F            |
| (c) | Oil Pressure                        |                  |
|     | Green Arc (Normal Operating Range)  | 60 PSI to 90 PSI |
|     | Yellow Arc (Caution Range) (Idle)   | 25 PSI to 60 PSI |
|     | Red Line (Minimum)                  | 25 PSI           |
|     | Red Line (Maximum)                  | 90 PSI           |
| (d) | Fuel Pressure                       |                  |
|     | Green Arc (Normal Operating Range)  | .5 PSI to 8 PSI  |
|     | Red Line (Minimum)                  | .5 PSI           |
|     | Red Line (Maximum)                  | 8 PSI            |

## 2.11 WEIGHT LIMITS

|     |                 |          |          |
|-----|-----------------|----------|----------|
|     |                 | NORMAL   | UTILITY  |
| (a) | Maximum Weight  | 2550 LBS | 1950 LBS |
| (b) | Maximum Baggage | 200 LBS  | 0 LBS    |

### NOTE

Refer to Section 5 (Performance) for maximum weight as limited by performance.

### 2.13 CENTER OF GRAVITY LIMITS

(a) Normal Category

| Weight<br>Pounds | Forward Limit<br>Inches Aft of Datum | Rearward Limit<br>Inches Aft of Datum |
|------------------|--------------------------------------|---------------------------------------|
| 2550             | 88.6                                 | 93.0                                  |
| 2050 (and less)  | 82.0                                 | 93.0                                  |

(b) Utility Category

| Weight<br>Pounds | Forward Limit<br>Inches Aft of Datum | Rearward Limit<br>Inches Aft of Datum |
|------------------|--------------------------------------|---------------------------------------|
| 1950 (and less)  | 82.0                                 | 86.5                                  |

#### NOTES

Straight line variation between points given.

The datum used is 78.4 inches ahead of the wing leading edge at the inboard intersection of the straight and tapered section.

It is the responsibility of the airplane owner and the pilot to insure that the airplane is properly loaded. See Section 6 (Weight and Balance) for proper loading instructions.

### 2.15 MANEUVER LIMITS

- (a) Normal Category - All acrobatic maneuvers including spins prohibited.
- (b) Utility Category - Approved maneuvers for bank angles exceeding 60°.

|             | Entry Speed |
|-------------|-------------|
| Steep Turns | 124 MPH     |
| Lazy Eights | 124 MPH     |
| Chandelles  | 124 MPH     |

### 2.17 FLIGHT LOAD FACTORS

|                                    | NORMAL                         | UTILITY |
|------------------------------------|--------------------------------|---------|
| (a) Positive Load Factor (Maximum) | 3.8 G                          | 4.4 G   |
| (b) Negative Load Factor (Maximum) | No inverted maneuvers approved |         |

## **2.19 TYPES OF OPERATION**

The airplane is approved for the following operations when equipped in accordance with FAR 91 or FAR 135.

- (a) Day V.F.R.
- (b) Night V.F.R.
- (c) Day I.F.R.
- (d) Night I.F.R.
- (e) Non Icing

## **2.21 FUEL LIMITATIONS**

- |                                                                                                                  |             |
|------------------------------------------------------------------------------------------------------------------|-------------|
| (a) Total Capacity                                                                                               | 50 U.S. GAL |
| (b) Unusable Fuel                                                                                                | 2 U.S. GAL  |
| The unusable fuel for this airplane has been determined as 1.0 gallon in each wing in critical flight attitudes. |             |
| (c) Usable Fuel                                                                                                  | 48 U.S. GAL |
| The usable fuel in this airplane has been determined as 24.0 gallons in each wing.                               |             |

THIS PAGE INTENTIONALLY LEFT BLANK



## 2.23 PLACARDS

In full view of the pilot:

"THIS AIRPLANE MUST BE OPERATED AS A NORMAL OR UTILITY CATEGORY AIRPLANE IN COMPLIANCE WITH THE OPERATING LIMITATIONS STATED IN THE FORM OF PLACARDS, MARKINGS AND MANUALS.

ALL MARKINGS AND PLACARDS ON THIS AIRPLANE APPLY TO ITS OPERATION AS A UTILITY CATEGORY AIRPLANE. FOR NORMAL AND UTILITY CATEGORY OPERATIONS, REFER TO THE PILOT'S OPERATING HANDBOOK.

NO ACROBATIC MANEUVERS ARE APPROVED FOR NORMAL CATEGORY OPERATIONS. SPINS ARE PROHIBITED FOR BOTH NORMAL AND UTILITY CATEGORIES."

In full view of the pilot, the following takeoff and landing check lists will be installed:

### TAKEOFF CHECK LIST

Fuel on proper tank  
Electric fuel pump on  
Engine gauges checked  
Flaps - set  
Carb heat off

Mixture set  
Seat backs erect

Fasten belts/harness  
Trim tab - set  
Controls - free  
Door - latched  
Air Conditioner - off

### LANDING CHECK LIST

Fuel on proper tank  
Mixture rich  
Electric fuel pump on

Seat back erect

Flaps - set (115 mph)  
Fasten belts/harness  
Air Conditioner - off

The "AIR COND OFF" item in the above takeoff and landing check lists is mandatory for air conditioned aircraft only.

In full view of the pilot, in the area of the air conditioner control panel when the air conditioner is installed:

**"WARNING - AIR CONDITIONER MUST BE OFF TO INSURE  
NORMAL TAKEOFF CLIMB PERFORMANCE."**

Adjacent to upper door latch:

**"ENGAGE LATCH BEFORE FLIGHT."**

On inside of the baggage compartment door:

**"BAGGAGE MAXIMUM 200 LBS"  
"UTILITY CATEGORY OPERATION - NO BAGGAGE OR AFT  
PASSENGERS ALLOWED. NORMAL CATEGORY OPERATION  
- SEE PILOT'S OPERATING HANDBOOK WEIGHT AND  
BALANCE SECTION FOR BAGGAGE AND AFT PASSENGER  
LIMITATIONS."**

In full view of the pilot:

**"ROUGH AIR OR MANEUVERING SPEED - 124 MPH."**

**"UTILITY CATEGORY OPERATION - NO AFT PASSENGERS  
ALLOWED."**

**"DEMONSTRATED CROSS WIND COMPONENT - 20 MPH."**

On the instrument panel in full view of the pilot when the oil cooler winterization kit is installed:

**"OIL COOLER WINTERIZATION PLATE TO BE REMOVED  
WHEN AMBIENT TEMPERATURE EXCEEDS 50°F."**

In full view of the pilot:

**"UTILITY CATEGORY ONLY."**

**ACROBATIC MANEUVERS ARE LIMITED TO THE FOLLOWING:**

|                    |                    |
|--------------------|--------------------|
|                    | <b>ENTRY SPEED</b> |
| <b>STEEP TURNS</b> | <b>124 MPH</b>     |
| <b>LAZY EIGHTS</b> | <b>124 MPH</b>     |
| <b>CHANDELLES</b>  | <b>124 MPH</b>     |

On the instrument panel in full view of the pilot:

**"WARNING - TURN OFF STROBE LIGHTS WHEN TAXIING  
IN VICINITY OF OTHER AIRCRAFT, OR DURING FLIGHT  
THROUGH CLOUD, FOG OR HAZE."**

## TABLE OF CONTENTS

### SECTION 3

#### EMERGENCY PROCEDURES

| Paragraph<br>No. |                                                | Page<br>No. |
|------------------|------------------------------------------------|-------------|
| 3.1              | General .....                                  | 3-1         |
| 3.3              | Emergency Procedures Check List .....          | 3-3         |
| 3.5              | Amplified Emergency Procedures (General) ..... | 3-7         |
| 3.7              | Engine Fire During Start .....                 | 3-7         |
| 3.9              | Engine Power Loss During Takeoff .....         | 3-7         |
| 3.11             | Engine Power Loss In Flight .....              | 3-8         |
| 3.13             | Power Off Landing .....                        | 3-8         |
| 3.15             | Fire In Flight .....                           | 3-9         |
| 3.17             | Loss of Oil Pressure .....                     | 3-9         |
| 3.19             | Loss of Fuel Pressure .....                    | 3-10        |
| 3.21             | High Oil Temperature .....                     | 3-10        |
| 3.23             | Alternator Failure .....                       | 3-10        |
| 3.25             | Spin Recovery .....                            | 3-10        |
| 3.27             | Open Door .....                                | 3-11        |
| 3.29             | Engine Roughness .....                         | 3-11        |

## SECTION 3

### EMERGENCY PROCEDURES

#### 3.1 GENERAL

The recommended procedures for coping with various types of emergencies and critical situations are provided by this section. All of required (FAA regulations) emergency procedures and those necessary for the safe operation of the airplane as determined by the operating and design features of the airplane are presented.

Emergency procedures associated with those optional systems and equipment which require handbook supplements are provided by Section 9 (Supplements).

The first portion of this section consists of an abbreviated emergency check list which supplies an action sequence for critical situations with little emphasis on the operation of systems.

The remainder of the section is devoted to amplified emergency procedures containing additional information to provide the pilot with a more complete understanding of the procedures.

These procedures are suggested as the best course of action for coping with the particular condition described, but are not a substitute for sound judgment and common sense. Since emergencies rarely happen in modern aircraft, their occurrence is usually unexpected and the best corrective action may not always be obvious. Pilots should familiarize themselves with the procedures given in this section and be prepared to take appropriate action should an emergency arise.

Most basic emergency procedures, such as power off landings, are a normal part of pilot training. Although these emergencies are discussed here, this information is not intended to replace such training, but only to provide a source of reference and review, and to provide information on procedures which are not the same for all aircraft. It is suggested that the pilot review standard emergency procedures periodically to remain proficient in them.

THIS PAGE INTENTIONALLY LEFT BLANK



### LOSS OF FUEL PRESSURE

Electric fuel pump .....ON  
Fuel selector .....check on full tank

### HIGH OIL TEMPERATURE

Land at nearest airport and investigate the problem.  
Prepare for power off landing.

### ALTERNATOR FAILURE

Verify failure  
Reduce electrical load  
Alternator circuit breakers .....check  
Alt switch .....OFF (for 1 second),  
then on

If no output:  
Alt switch .....OFF

Reduce electrical load and land as soon as practical.

### SPIN RECOVERY

Throttle .....idle  
Ailerons .....neutral  
Rudder .....full opposite to  
direction of rotation  
Control wheel .....full forward  
Rudder .....neutral (when  
rotation stops)  
Control wheel .....as required to smoothly  
regain level flight altitude

### OPEN DOOR

If both upper and lower latches are open, the door will trail slightly open and airspeeds will be reduced slightly.

To close the door in flight:  
Slow airplane to 100 MPH IAS (87 KTS IAS)  
Cabin vents .....close  
Storm window .....open

If upper latch is open .....latch  
If lower latch is open .....open top latch, push  
door further open and  
close rapidly. Latch top  
latch.

A slip in direction of open door will assist latching.

### ENGINE ROUGHNESS

Carburetor heat .....ON

If roughness continues after one min:  
Carburetor heat .....OFF  
Mixture .....adjust for max.  
smoothness

Electric fuel pump .....ON  
Fuel selector .....switch tanks  
Engine gauges .....check  
Magneto switch .....“L” then “R”  
then “BOTH”

If operation is satisfactory on either one, continue on that magneto at reduced power and full “RICH” mixture to first airport.

Prepare for power off landing.

THIS PAGE INTENTIONALLY LEFT BLANK



THIS PAGE INTENTIONALLY LEFT BLANK

### **3.5 AMPLIFIED EMERGENCY PROCEDURES (GENERAL)**

The following paragraphs are presented to supply additional information for the purpose of providing the pilot with a more complete understanding of the recommended course of action and probable cause of an emergency situation.

### **3.7 ENGINE FIRE DURING START**

Engine fires during start are usually the result of overpriming. The first attempt to extinguish the fire is to try to start the engine and draw the excess fuel back into the induction system.

If a fire is present before the engine has started, move the mixture control to idle cut-off, open the throttle and crank the engine. This is an attempt to draw the fire back into the engine.

If the engine has started, continue operating to try to pull the fire into the engine.

In either case (above), if fire continues more than a few seconds, the fire should be extinguished by the best available external means.

The fuel selector valves should be "OFF" and the mixture at idle cut-off if an external fire extinguishing method is to be used.

### **3.9 ENGINE POWER LOSS DURING TAKEOFF**

The proper action to be taken if loss of power occurs during takeoff will depend on the circumstances of the particular situation.

If sufficient runway remains to complete a normal landing, land straight ahead.

If insufficient runway remains, maintain a safe airspeed and make only a shallow turn if necessary to avoid obstructions. Use of flaps depends on the circumstances. Normally, flaps should be fully extended for touchdown.

If sufficient altitude has been gained to attempt a restart, maintain a safe airspeed and switch the fuel selector to another tank containing fuel. Check the electric fuel pump to insure that it is "ON" and that the mixture is "RICH." The carburetor heat should be "ON."

If engine failure was caused by fuel exhaustion, power will not be regained after switching fuel tanks until the empty fuel lines are filled. This may require up to ten seconds.

If power is not regained, proceed with the Power Off Landing procedure (refer to the emergency check list and paragraph 3.13).

### **3.11 ENGINE POWER LOSS IN FLIGHT**

Complete engine power loss is usually caused by fuel flow interruption and power will be restored shortly after fuel flow is restored. If power loss occurs at a low altitude, the first step is to prepare for an emergency landing (refer to paragraph 3.13). An airspeed of at least 87 MPH IAS (76 KTS IAS) should be maintained.

If altitude permits, switch the fuel selector to another tank containing fuel and turn the electric fuel pump "ON." Move the mixture control to "RICH" and the carburetor heat to "ON." Check the engine gauges for an indication of the cause of the power loss. Check to insure the primer is locked. If no fuel pressure is indicated, check the tank selector position to be sure it is on a tank containing fuel.

When power is restored move the carburetor heat to the "OFF" position and turn "OFF" the electric fuel pump.

If the preceding steps do not restore power, prepare for an emergency landing.

If time permits, turn the ignition switch to "L" then to "R" then back to "BOTH." Move the throttle and mixture control levers to different settings. This may restore power if the problem is too rich or too lean a mixture or if there is a partial fuel system restriction. Try other fuel tanks. Water in the fuel could take some time to be used up, and allowing the engine to windmill may restore power. If power loss is due to water, fuel pressure indications will be normal.

If engine failure was caused by fuel exhaustion power will not be restored after switching fuel tanks until the empty fuel lines are filled. This may require up to ten seconds.

If power is not regained, proceed with the Power Off Landing procedure (refer to the emergency check list and paragraph 3.13).

### **3.13 POWER OFF LANDING**

If loss of power occurs at altitude, trim the aircraft for best gliding angle (87 MPH IAS/76 KTS IAS) (Air Cond. off) and look for a suitable field. If measures taken to restore power are not effective, and if time permits, check your charts for airports in the immediate vicinity; it may be possible to land at one if you have sufficient altitude. If possible, notify the FAA by radio of your difficulty and intentions. If another pilot or passenger is aboard, let him help.

When you have located a suitable field, establish a spiral pattern around this field. Try to be at 1000 feet above the field at the downwind position, to make a normal landing approach. When the field can easily be reached, slow to 76 MPH IAS (66 KTS IAS) with flaps down for the shortest landing. Excess altitude may be lost by widening your pattern, using flaps or slipping, or a combination of these.

Touchdown should normally be made at the lowest possible airspeed.

When committed to a landing, close the throttle control and shut "OFF" the master and ignition switches. Flaps may be used as desired. Turn the fuel selector valve to "OFF" and move the mixture to idle cut-off. The seat belts and shoulder harness (if installed) should be tightened. Touchdown should be normally made at the lowest possible airspeed.

### **3.15 FIRE IN FLIGHT**

The presence of fire is noted through smoke, smell and heat in the cabin. It is essential that the source of the fire be promptly identified through instrument readings, character of the smoke, or other indications since the action to be taken differs somewhat in each case.

Check for the source of the fire first.

If an electrical fire is indicated (smoke in the cabin), the master switch should be turned "OFF." The cabin vents should be opened and the cabin heat turned "OFF." A landing should be made as soon as possible.

If an engine fire is present, switch the fuel selector to "OFF" and close the throttle. The mixture should be at idle cut-off. Turn the electric fuel pump "OFF." In all cases, the heater and defroster should be "OFF." If radio communication is not required select master switch "OFF." If the terrain permits, a landing should be made immediately.

#### **NOTE**

The possibility of an engine fire in flight is extremely remote. The procedure given is general and pilot judgment should be the determining factor for action in such an emergency.

### **3.17 LOSS OF OIL PRESSURE**

Loss of oil pressure may be either partial or complete. A partial loss of oil pressure usually indicates a malfunction in the oil pressure regulating system, and a landing should be made as soon as possible to investigate the cause and prevent engine damage.

A complete loss of oil pressure indication may signify oil exhaustion or may be the result of a faulty gauge. In either case, proceed toward the nearest airport, and be prepared for a forced landing. If the problem is not a pressure gauge malfunction, the engine may stop suddenly. Maintain altitude until such time as a dead stick landing can be accomplished. Don't change power settings unnecessarily, as this may hasten complete power loss.

Depending on the circumstances, it may be advisable to make an off airport landing while power is still available, particularly if other indications of actual oil pressure loss, such as sudden increases in temperatures, or oil smoke, are apparent, and an airport is not close.

If engine stoppage occurs, proceed with Power Off Landing.

### **3.19 LOSS OF FUEL PRESSURE**

If loss of fuel pressure occurs, turn "ON" the electric fuel pump and check that the fuel selector is on a full tank.

If the problem is not an empty tank, land as soon as practical and have the engine-driven fuel pump and fuel system checked.

### **3.21 HIGH OIL TEMPERATURE**

An abnormally high oil temperature indication may be caused by a low oil level, an obstruction in the oil cooler, damaged or improper baffle seals, a defective gauge, or other causes. Land as soon as practical at an appropriate airport and have the cause investigated.

A steady, rapid rise in oil temperature is a sign of trouble. Land at the nearest airport and let a mechanic investigate the problem. Watch the oil pressure gauge for an accompanying loss of pressure.

### **3.23 ALTERNATOR FAILURE**

Loss of alternator output is detected through zero reading on the ammeter. Before executing the following procedure, insure that the reading is zero and not merely low by actuating an electrically powered device, such as the landing light. If no increase in the ammeter reading is noted, alternator failure can be assumed.

The electrical load should be reduced as much as possible. Check the alternator circuit breakers for a popped circuit.

The next step is to attempt to reset the overvoltage relay. This is accomplished by moving the "ALT" switch to "OFF" for one second and then to "ON." If the trouble was caused by a momentary overvoltage condition (16.5 volts and up) this procedure should return the ammeter to a normal reading.

If the ammeter continues to indicate "O" output, or if the alternator will not remain reset, turn off the "ALT" switch, maintain minimum electrical load and land as soon as practical. All electrical load is being supplied by the battery.

### **3.25 SPIN RECOVERY**

Intentional spins are prohibited in this airplane. If a spin is inadvertently entered, immediately move the throttle to idle and the ailerons to neutral.

Full rudder should then be applied opposite to the direction of rotation followed by control wheel full forward. When the rotation stops, neutralize the rudder and ease back on the control wheel as required to smoothly regain a level flight attitude.

### 3.27 OPEN DOOR

The cabin door on the Cherokee is double latched, so the chances of its springing open in flight at both the top and bottom are remote. However, should you forget the upper latch, or not fully engage the lower latch, the door may spring partially open. This will usually happen at takeoff or soon afterward. A partially open door will not affect normal flight characteristics, and a normal landing can be made with the door open.

If both upper and lower latches are open, the door will trail slightly open, and airspeed will be reduced slightly.

To close the door in flight, slow the airplane to 100 MPH IAS (87 KTS IAS), close the cabin vents and open the storm window. If the top latch is open, latch it. If the lower latch is open, open the top latch, push the door further open and close rapidly. Then secure the top latch.

A slip in the direction of the open door will assist in the latching procedure.

### 3.29 ENGINE ROUGHNESS

Engine roughness is usually due to carburetor icing which is indicated by a drop in RPM, and may be accompanied by a slight loss of airspeed or altitude. If too much ice is allowed to accumulate, restoration of full power may not be possible; therefore, prompt action is required.

Turn carburetor heat on (See Note). RPM will decrease slightly and roughness will increase. Wait for a decrease in engine roughness or an increase in RPM, indicating ice removal. If no change in approximately one minute, return the carburetor heat to "OFF."

If the engine is still rough, adjust the mixture for maximum smoothness. The engine will run rough if too rich or too lean. The electric fuel pump should be switched to "ON" and the fuel selector switched to the other tank to see if fuel contamination is the problem. Check the engine gauges for abnormal readings. If any gauge readings are abnormal, proceed accordingly. Move the magneto switch to "L" then to "R." then back to "BOTH." If operation is satisfactory on either magneto, proceed on that magneto at reduced power, with mixture full "RICH," to a landing at the first available airport.

If roughness persists, prepare for a precautionary landing at pilot's discretion.

#### NOTE

Partial carburetor heat may be worse than no heat at all, since it may partially melt ice, which will refreeze in the intake system. When using carburetor heat, therefore, always use full heat, and when ice is removed return the control to the full cold position.

THIS PAGE INTENTIONALLY LEFT BLANK

## TABLE OF CONTENTS

### SECTION 4

#### NORMAL PROCEDURES

| Paragraph<br>No. |                                            | Page<br>No. |
|------------------|--------------------------------------------|-------------|
| 4.1              | General .....                              | 4-1         |
| 4.3              | Airspeeds for Safe Operations .....        | 4-1         |
| 4.5              | Normal Procedures Check List .....         | 4-3         |
| 4.7              | Amplified Normal Procedures (General)..... | 4-7         |
| 4.9              | Preflight Check .....                      | 4-7         |
| 4.11             | Before Starting Engine.....                | 4-8         |
| 4.13             | Starting Engine.....                       | 4-9         |
| 4.15             | Warm-Up.....                               | 4-11        |
| 4.17             | Taxiing .....                              | 4-11        |
| 4.19             | Ground Check .....                         | 4-11        |
| 4.21             | Before Takeoff .....                       | 4-12        |
| 4.23             | Takeoff .....                              | 4-12        |
| 4.25             | Climb.....                                 | 4-13        |
| 4.27             | Cruising .....                             | 4-13        |
| 4.29             | Approach and Landing.....                  | 4-14        |
| 4.31             | Stopping Engine .....                      | 4-14        |
| 4.33             | Parking .....                              | 4-15        |
| 4.35             | Stalls.....                                | 4-15        |
| 4.37             | Turbulent Air Operation.....               | 4-16        |
| 4.39             | Weight and Balance .....                   | 4-16        |



## SECTION 4

### NORMAL PROCEDURES

#### 4.1 GENERAL

This section clearly describes the recommended procedures for the conduct of normal operations for the Cherokee Archer II. All of the required (FAA regulations) procedures and those necessary for the safe operation of the airplane as determined by the operating and design features of the airplane are presented.

Normal procedures associated with those optional systems and equipment which require handbook supplements are provided by Section 9 (Supplements).

These procedures are provided to present a source of reference and review and to supply information on procedures which are not the same for all aircraft. Pilots should familiarize themselves with the procedures given in this section in order to become proficient in the normal operations of the airplane.

The first portion of this section consists of a short form check list which supplies an action sequence for normal operations with little emphasis on the operation of the systems.

The remainder of the section is devoted to amplified normal procedures which provide detailed information and explanations of the procedures and how to perform them. This portion of the section is not intended for use as an in-flight reference due to the lengthy explanations. The short form check list should be used for this purpose.


#### 4.3 AIRSPEEDS FOR SAFE OPERATIONS

The following airspeeds are those which are significant to the safe operation of the airplane. These figures are for standard airplanes flown at gross weight under standard conditions at sea level.

Performance for a specific airplane may vary from published figures depending upon the equipment installed, the condition of the engine, airplane and equipment, atmospheric conditions and piloting technique.

|                                             |                   |
|---------------------------------------------|-------------------|
| (a) Best Rate of Climb Speed (IAS)          | 87 MPH ( 76 KTS)  |
| (b) Best Angle of Climb Speed (IAS)         | 74 MPH ( 64 KTS)  |
| (c) Turbulent Air Operating Speed (IAS)     | 124 MPH (108 KTS) |
| (d) Landing Approach Speed (IAS)            | 76 MPH ( 66 KTS)  |
| (e) Maximum Demonstrated Crosswind Velocity | 20 MPH ( 17 KTS)  |

THIS PAGE INTENTIONALLY LEFT BLANK

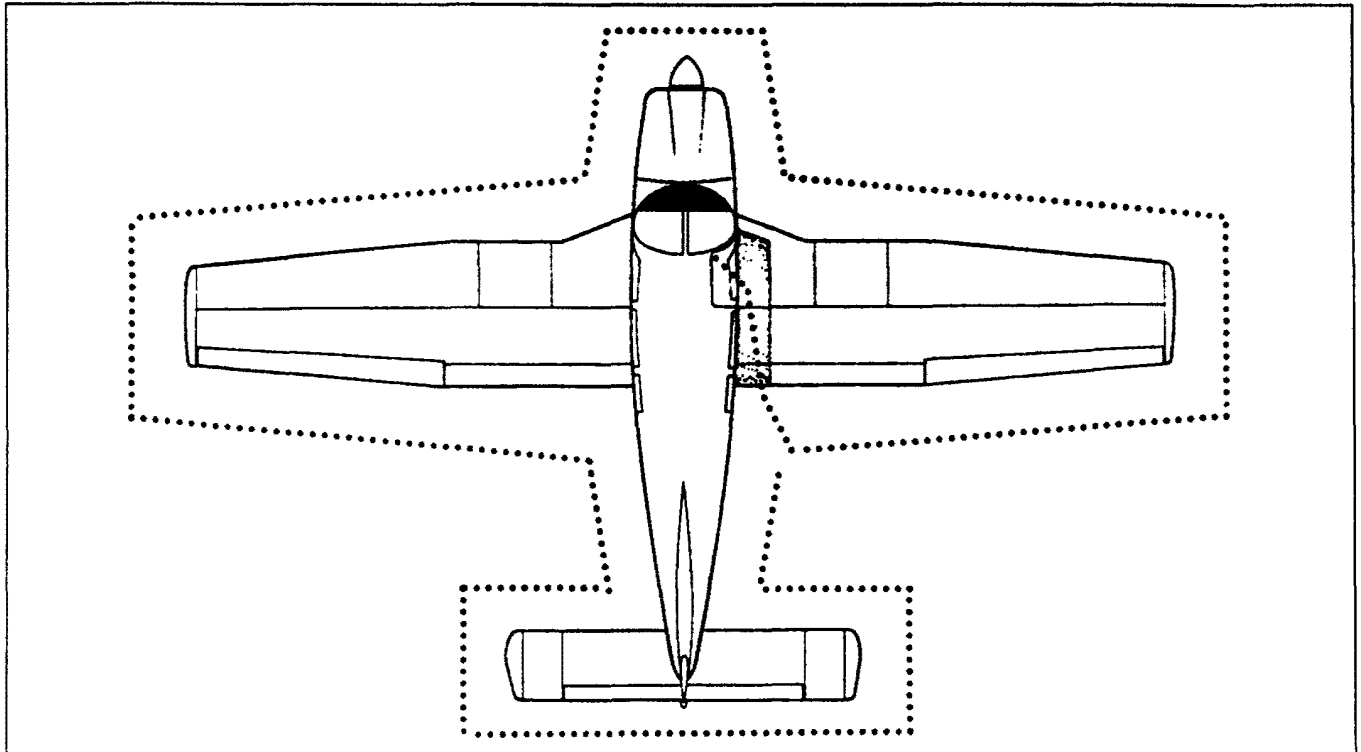

WALK-AROUND

Figure 4-1

#### 4.5 NORMAL PROCEDURES CHECK LIST

##### PREFLIGHT CHECK

Control wheel .....release belts  
Master switch .....ON  
Fuel quantity gauges .....check  
Master switch .....OFF  
Ignition .....OFF  
Exterior .....check for damage  
Control surfaces .....check for interference -  
free of ice, snow, frost  
Hinges .....check for interference  
Wings .....free of ice, snow, frost  
Stall warning .....check  
Navagation lights .....check  
Fuel tanks .....check supply  
visually - secure caps  
Fuel tank sumps .....drain  
Fuel vents .....open  
Main gear struts .....proper  
inflation (4.50 in.)  
Tires .....check  
Brake blocks .....check

Pitot head .....remove cover-  
holes clear  
Windshield .....clean  
Propeller and spinner .....check  
Fuel and oil .....check for leaks  
Oil .....check level  
Dipstick .....properly seated  
Cowling .....secure  
Inspection covers .....secure  
Nose wheel tire .....check  
Nose gear strut .....proper  
inflation (3.25 in.)  
Air inlets .....clear  
Alternator belt .....check tension  
Tow bar and control locks .....stow  
Baggage .....stowed properly -  
secure  
Baggage door .....close and secure  
Fuel strainer .....drain  
Primary flight controls .....proper operation  
Cabin doors .....close and secure  
Required papers .....on board  
Seat belts and harness .....fastened - check  
inertia reel

## STARTING WITH EXTERNAL POWER SOURCE

**Master switch.....OFF**

**Terminals .....connect**

**Plug .....insert in fuselage**

**Master switch .....ON**

**Proceed with normal start**

**Master switch.....OFF**

**Plug.....disconnect from  
fuselage**

**Master switch.....ON - check ammeter**

**Oil pressure .....check**

## WARM-UP

Throttle.....800 to 1200 RPM

## TAXIING

Chocks.....Removed  
Taxi area.....clear  
Throttle .....apply slowly  
Brakes .....check  
Steering.....check

## GROUND CHECK

|                                                                                     |                    |
|-------------------------------------------------------------------------------------|--------------------|
| Throttle.....                                                                       | 2000 RPM           |
| Magnetos .....                                                                      | max. drop 175 RPM  |
|                                                                                     | -max. diff. 50 RPM |
| Vacuum .....                                                                        | 5.0" Hg. $\pm$ .1  |
| Oil temp .....                                                                      | check              |
| Oil pressure .....                                                                  | check              |
| Air conditioner .....                                                               | check              |
| Annunciator panel .....                                                             | press-to-test      |
| Carburetor heat.....                                                                | check              |
| Engine is warm for takeoff when throttle can be<br>opened without engine faltering. |                    |
| Electric fuel pump .....                                                            | OFF                |
| Fuel pressure .....                                                                 | check              |

## SOFT FIELD

**Master switch .....ON**

**Flight instruments .....check**

**Fuel selector .....proper tank**

**Electric fuel pump .....ON**

**Engine gauges .....check**

**Carburetor heat.....OFF**

**Seat backs.....erect**

**Mixture .....set**

**Belts/harness .....fastened**

**Empty seats.....seat belts  
snugly fastened**

**Flaps .....set**

**Trim tab .....set**

**Controls .....free**

**Doors .....latched**

**Air conditioner .....OFF**

## TAKEOFF

NORMAL

Flaps .....set  
Tab.....set  
Accelerate to 60 to 75 MPH IAS (52 to 65 KTS IAS)  
Control wheel.....back pressure to  
rotate to climb attitude

### SHORT FIELD, OBSTACLE CLEARANCE

Flaps .....25° (second notch)  
Accelerate to 47-56 MPH IAS (41 to 49 KTS IAS)  
depending on aircraft weight  
Control wheel.....back pressure to  
rotate to climb attitude  
After breaking ground, accelerate to 52-62 MPH  
IAS (45 to 54 KTS IAS) depending on aircraft  
weight  
Accelerate to best flaps up angle of climb speed - 74  
MPH IAS (64 KTS IAS), slowly retract the flaps  
and climb past the obstacle.  
Accelerate to best flaps up rate of climb speed - 87  
MPH IAS (76 KTS IAS)

Flaps .....25° (second notch)  
Accelerate to 47-56 MPH IAS (41 to 49 KTS IAS)  
depending on aircraft weight  
Control wheel.....back pressure to  
rotate to climb attitude  
After breaking ground, accelerate to 52-62 MPH  
IAS (45 to 54 KTS IAS) depending on aircraft  
weight  
Accelerate to best flaps up rate of climb speed 87  
MPH IAS (76 KTS IAS)  
Flaps .....retract slowly

## CLIMB

|                             |                             |
|-----------------------------|-----------------------------|
| Best rate (flaps up).....   | 87 MPH IAS<br>(76 KTS IAS)  |
| Best angle (flaps up) ..... | 74 MPH IAS<br>(64 MPH IAS)  |
| En route .....              | 100 MPH IAS<br>(87 KTS IAS) |
| Electric fuel pump .....    | OFF at<br>desired altitude  |

## CRUISING

Reference performance charts and Avco-Lycoming  
Operator's Manual.

|                       |                     |
|-----------------------|---------------------|
| Normal max power..... | 75%                 |
| Power.....            | set per power table |
| Mixture .....         | adjust              |

## APPROACH AND LANDING

**Fuel selector .....proper tank**  
**Seat backs .....erect**  
**Belts/harness .....fasten**  
**Electric fuel pump .....ON**  
**Mixture .....set**  
**Flaps .....set - 115 MPH IAS**  
**(100 KTS IAS) max**  
**Air conditioner .....OFF**  
**Trim to 86 MPH IAS (75 KTS IAS)**  
**Final approach speed (flaps 40°) .....76 MPH IAS**  
**(66 KTS IAS)**

**STOPPING ENGINE**

Flaps .....retract  
Electric fuel pump .....OFF  
Air conditioner .....OFF  
Radio's .....OFF  
Throttle.....full aft  
Mixture .....idle cut-off  
Magnetos.....OFF  
Master switch .....OFF

**PARKING**

Parking brake .....set  
Control wheel.....secured with belts  
Flaps .....full up  
Wheel chocks .....in place  
Tie downs .....secure

#### **4.7 AMPLIFIED NORMAL PROCEDURES (GENERAL)**

The following paragraphs are provided to supply detailed information and explanations of the normal procedures necessary for the safe operation of the airplane.

#### **4.9 PREFLIGHT CHECK**

The airplane should be given a thorough preflight and walk-around check. The preflight should include a check of the airplane's operational status, computation of weight and C.G. limits, takeoff distance and in-flight performance. A weather briefing should be obtained for the intended flight path, and any other factors relating to a safe flight should be checked before takeoff.

Upon entering the cockpit, release the seat belts securing the control wheel. Turn "ON" the master switch and check the fuel quantity gauges for sufficient fuel. After the fuel quantity check is made turn the master switch "OFF" and the ignition switch "OFF."

To begin the exterior walk-around, check for external damage and operational interference of the control surfaces or hinges. Insure that the wings and control surfaces are free of snow, ice, frost or any other foreign materials.

An operational check of the stall warning system should now be made by turning the master switch "ON," lifting the detector and checking to determine if the horn is actuated. The master switch should be returned to the "OFF" position after the check is complete.

The next step is to check the navigation lights. The master switch must be "ON" for this check. Return the master switch to "OFF" after this check is complete.

A visual check of the fuel tank quantity should be performed. Remove the filler cap from each tank and visually check the supply and color. Be sure to secure the caps properly after the check is complete.

The fuel system should be drained daily prior to the first flight and after refueling to avoid the accumulation of water or sediment. Each fuel tank is equipped with an individual quick drain located at the lower inboard rear corner of the tank. The fuel strainer is equipped with a quick drain valve located on the front lower corner of the fire wall. It is important that the fuel system be drained properly.

Open the quick drain valve with the fuel selector valve on one tank and allow fuel to flow for a few seconds. Place a container under the drain and examine the contents for sediment and water.

When enough fuel has flowed to ensure that the lines and strainers are free of water and sediment, close the drain and dispose of the contents of the container.

Repeat the procedure with the fuel selector valve changed to the other tank.

#### **CAUTION**

When draining any amount of fuel, care should be taken to insure that no fire hazard exists before starting engine.

After using the quick drain, it should be checked to make sure it has closed completely and is not leaking.

Check all of the fuel tank vents to make sure they are open.

Next, a complete check of the landing gear. Check the main gear shock struts for proper inflation. There should be 4.50 inches of strut exposure under a normal static load. The nose gear should be checked for 3.25 inches of strut exposure. Check all tires for cuts and wear and insure proper inflation. Make a visual check of the brake blocks for wear or damage.

Remove the cover from the pitot head on the underside of the left wing. Check the pitot head to make sure the holes are open and clear of obstructions.

Don't forget to clean and check the windshield.

The propeller and spinner should be checked for defects or nicks.

Lift the cowlings and check for any obvious fuel or oil leaks. Check the oil level. Make sure that the dipstick has properly seated after checking. Secure the cowlings and check the inspection covers.

Check the air inlets for foreign matter and the alternator belt for proper tension.

Stow the tow bar and check the baggage for proper storage and security. The baggage compartment doors should be closed and secure.

Upon entering the aircraft, ascertain that all primary flight controls operate properly. Close and secure the fore and aft cabin doors and check that all the required papers are in order and in the airplane.

Fasten the seat belts and shoulder harness and check the function of the inertia reel by pulling sharply on the strap.

#### **4.11 BEFORE STARTING ENGINE**

Before starting the engine the brakes should be set "ON" and the carburetor heat lever moved to the full COLD position. The fuel selector should then be moved to the desired tank.



#### 4.13 STARTING ENGINE

(a) Starting Engine When Cold

Open the throttle lever approximately 1/4 inch. Turn "ON" the master switch and the electric fuel pump.

Move the mixture control to full "RICH" and engage the starter by rotating the magneto switch clockwise and pressing in. When the engine fires, release the magneto switch, and move the throttle to the desired setting.

If the engine does not fire within five to ten seconds, disengage the starter, prime the engine and repeat the starting procedure.

(b) Starting Engine When Hot

Open the throttle approximately 1/2 inch. Turn "ON" the master switch and the electric fuel pump. Move the mixture control lever to full RICH and engage the starter by rotating the magneto switch clockwise and pressing in. When the engine fires, release the magneto switch and move the throttle to the desired setting.

(c) Starting Engine When Flooded

The throttle lever should be full "OPEN." Turn "ON" the master switch and turn "OFF" the electric fuel pump. Move the mixture control lever to idle cut-off and engage the starter by rotating the magneto switch clockwise and pressing in. When the engine fires, release the magneto switch, advance the mixture and retard the throttle.

(d) Starting Engine With External Power Source

An optional feature called the Piper External Power (PEP) allows the operator to use an external battery to crank the engine without having to gain access to the airplane's battery.

Turn the airplane master switch "OFF." Connect the RED lead of the PEP kit jumper cable to the POSITIVE (+) terminal of an external 12-volt battery and the BLACK lead to the NEGATIVE (-) terminal. Insert the plug of the jumper cable to the socket located on the fuselage.

Turn "ON" the airplane master switch and proceed with the normal engine starting procedure.

After the engine has started, turn the master switch "OFF" and disconnect the jumper cable from the airplane. Return the master switch to the "ON" position and check the alternator ammeter for an indication of output. DO NOT ATTEMPT FLIGHT IF THERE IS NO INDICATION OF ALTERNATOR OUTPUT.

When the engine is firing evenly, advance the throttle to 800 RPM. If oil pressure is not indicated within thirty seconds, stop the engine and determine the trouble. In cold weather it will take a few seconds longer to get an oil pressure indication. If the engine has failed to start, refer to the Lycoming Operating Handbook, Engine Troubles and Their Remedies.

Starter manufacturers recommend that cranking periods be limited to thirty seconds with a two minute rest between cranking periods. Longer cranking periods will shorten the life of the starter.

#### 4.15 WARM-UP

Warm-up the engine at 800 to 1200 RPM for not more than two minutes in warm weather and four minutes in cold. Avoid prolonged idling at low RPM, as this practice may result in fouled spark plugs.

Takeoff may be made as soon as the ground check is completed, provided that the throttle may be opened fully without backfiring or skipping, and without a reduction in engine oil pressure.

Do not operate the engine at high RPM when running up or taxiing over ground containing loose stones, gravel or any loose material that may cause damage to the propeller blades.

#### 4.17 TAXIING

Before attempting to taxi the airplane, ground personnel should be instructed and approved by a qualified person authorized by the owner. Ascertain that the propeller back blast and taxi areas are clear.

Power should be applied slowly to start the taxi roll. Taxi a few feet forward and apply the brakes to determine their effectiveness. While taxiing, make slight turns to ascertain the effectiveness of the steering.

Observe wing clearances when taxiing near buildings or other stationary objects. If possible, station an observer outside the airplane.

Avoid holes and ruts when taxiing over uneven ground.

Do not operate the engine at high RPM when running up or taxiing over ground containing loose stones, gravel or any loose material that may cause damage to the propeller blades.

#### 4.19 GROUND CHECK

The magnetos should be checked at 2000 RPM. Drop off on either magneto should not exceed 175 RPM and the difference between the magnetos should not exceed 50 RPM. Operation on one magneto should not exceed 10 seconds.

Check the vacuum gauge; the indicator should read  $5.0'' \pm .1''$  Hg at 2000 RPM.

Check both oil temperature and oil pressure. The temperature may be low for some time if the engine is being run for the first time of the day, but as long as the pressure is within limits the engine is ready for takeoff.

Check the annunciator panel lights with the press-to-test button. Also check the air conditioner.

Carburetor heat should also be checked prior to takeoff to be sure the control is operating properly and to clear any ice which may have formed during taxiing. Avoid prolonged ground operation with carburetor heat "ON" as the air is unfiltered.

The electric fuel pump should be turned "OFF" after starting or during warm-up to make sure that the engine driven pump is operating. Prior to takeoff the electric pump should be turned ON again to prevent loss of power during takeoff should the engine driven pump fail. The engine is warm enough for takeoff when the throttle can be opened without the engine faltering.

#### **4.21 BEFORE TAKEOFF**

All aspects of each particular takeoff should be considered prior to executing the takeoff procedure.

Turn "ON" the master switch and check and set all of the flight instruments as required. Check the fuel selector to make sure it is on the proper tank (fullest). Turn "ON" the electric fuel pump and check the engine gauges. The carburetor heat should be in the "OFF" position.

All seat backs should be erect.

The mixture should be set and the seat belts and shoulder harness fastened. Fasten the seat belts snugly around the empty seats.

Exercise and set the flaps and trim tab. Insure proper flight control movement and response.

All doors should be properly secured and latched.

On air conditioned models, the air conditioner must be "OFF" to insure normal takeoff performance.

#### **4.23 TAKEOFF**

The normal takeoff technique is conventional for the Cherokee Archer II. The tab should be set slightly aft of neutral, with the exact setting determined by the loading of the airplane. Allow the airplane to accelerate to 60 to 75 MPH IAS (52 to 65 KTS IAS) depending on the weight of the aircraft and ease back on the control wheel to rotate to climb attitude.

The procedure used for a short field takeoff with an obstacle clearance or a soft field takeoff differs slightly from the normal technique. The flaps should be lowered to 25° (second notch). Allow the aircraft to accelerate to 47 to 56 MPH IAS (41 to 49 KTS IAS) depending on the aircraft weight and rotate the aircraft to climb attitude. After breaking ground, accelerate to 52-62 MPH IAS (45 to 54 KTS IAS), depending on aircraft weight. Continue to climb while accelerating to the flaps-up rate of climb speed, 87 MPH IAS (76 KTS IAS) if no obstacle is present or 74 MPH IAS (64 KTS IAS) if obstacle clearance is a consideration. Slowly retract the flaps while climbing out.

#### **4.25 CLIMB**

The best rate of climb at gross weight will be obtained at 87 MPH IAS (76 KTS IAS). The best angle of climb may be obtained at 74 MPH IAS (64 KTS IAS). At lighter than gross weight these speeds are reduced somewhat. For climbing en route, a speed of 100 MPH IAS (87 KTS IAS) is recommended. This will produce better forward speed and increased visibility over the nose during the climb.

When reaching the desired altitude, the electric fuel pump may be turned off.

#### **4.27 CRUISING**

The cruising speed of the Cherokee Archer II is determined by many factors, including power setting, altitude, temperature, loading and equipment installed in the airplane.

The normal maximum cruising power is 75% of the rated horsepower of the engine. Airspeeds which may be obtained at various altitudes and power settings can be determined from the performance graphs provided by Section 5.

Use of the mixture control in cruising flight reduces fuel consumption significantly, especially at higher altitudes. The mixture should be leaned during cruising operation above 5000 ft. altitude and at pilot's discretion at lower altitudes when 75% power or less is being used. If any doubt exists as to the amount of power being used, the mixture should be in the full "RICH" position for all operations under 5000 feet.

To lean the mixture, disengage the lock and pull the mixture control until the engine becomes rough, indicating that the lean mixture limit has been reached in the leaner cylinders. Then enrich the mixture by pushing the control towards the instrument panel until engine operation becomes smooth.

If the airplane is equipped with the optional exhaust gas temperature (EGT) gauge, a more accurate means of leaning is available to the pilot. For this procedure, refer to the "Avco-Lycoming Operator's Manual."

In order to keep the airplane in best lateral trim during cruise flight, the fuel should be used alternately from each tank at one hour intervals.

Always remember that the electric fuel pump should be turned "ON" before switching tanks, and should be left on for a short period thereafter. In order to keep the airplane in best lateral trim during cruising flight, the fuel should be used alternately from each tank. It is recommended that one tank be used for one hour after takeoff, then the other tank be used for two hours; then return to the first tank, which will have approximately one and one half hours of fuel remaining if the tanks were full at takeoff. The second tank will contain approximately one half hour of fuel. Do not run tanks completely dry in flight. The electric fuel pump should be normally "OFF" so that any malfunction of the engine driven fuel pump is immediately apparent. If signs of fuel starvation should occur at any time during flight, fuel exhaustion should be suspected; at which time the fuel selector should be immediately positioned to the other tank and the electric fuel pump switched to the "ON" position.

#### **4.29 APPROACH AND LANDING**

Check to insure the fuel selector is on the proper (fullest) tank and that the seat backs are erect. The seat belts and shoulder harness should be fastened and the inertia reel checked.

Turn "ON" the electric fuel pump and turn "OFF" the air conditioner. The mixture should be set in the full "RICH" position.

When on final approach, the airplane should be trimmed to an approach speed of about 76 MPH IAS (66 KTS IAS) with flaps extended. The flaps can be lowered at speeds up to 115 MPH IAS (100 KTS IAS), if desired.

The mixture control should be kept in full "RICH" position to insure maximum acceleration if it should be necessary to open the throttle again. Carburetor heat should not be applied unless there is an indication of carburetor icing, since the use of carburetor heat causes a reduction in power which may be critical in case of a go-around. Full throttle operation with carburetor heat on is likely to cause detonation.

The amount of flap used during landings and the speed of the aircraft at contact with the runway should be varied according to the landing surface and conditions of wind and airplane loading. It is generally good practice to contact the ground at the minimum possible safe speed consistent with existing conditions.

Normally, the best technique for short and slow landings is to use full flap and enough power to maintain the desired airspeed and approach flight path. Mixture should be full "RICH," fuel on the fullest tank, and electric fuel pump "ON." Reduce the speed during the flareout and contact the ground close to the stalling speed. After ground contact hold the nose wheel off as long as possible. As the airplane slows down, gently lower the nose and apply the brakes. Braking is most effective when flaps are raised and back pressure is applied to the control wheel, putting most of the aircraft weight on the main wheels. In high wind conditions, particularly in strong crosswinds, it may be desirable to approach the ground at higher than normal speeds with partial or no flaps.

#### **4.31 STOPPING ENGINE**

At the pilot's discretion, the flaps should be raised and the electric fuel pump turned "OFF." The air conditioner and radios should be turned "OFF," and the engine stopped by disengaging the mixture control lock and pulling the mixture control back to idle cut-off. The throttle should be left full aft to avoid engine vibration while stopping. Then the magneto and master switches must be turned "OFF."

#### 4.33 PARKING

If necessary, the airplane should be moved on the ground with the aid of the nose wheel tow bar provided with each airplane and secured behind the rear seats. The aileron and stabilator controls should be secured by looping the safety belt through the control wheel and pulling it snug. The flaps are locked when in the "UP" position and should be left retracted.

Tie downs can be secured to rings provided under each wing and to the tail skid. The rudder is held in position by its connections to the nose wheel steering and normally does not have to be secured.

#### 4.35 STALLS

The stall characteristics of the Cherokee Archer II are conventional. An approaching stall is indicated by a stall warning horn which is activated between five and ten miles per hour above stall speed. Mild airframe buffeting and gentle pitching may also precede the stall.

The gross weight stalling speed of the Cherokee Archer II with power off and full flaps is 61 MPH CAS (53 KTS CAS). With the flaps up this speed is increased 7 MPH (6 KTS). Loss of altitude during stalls varies from 100 to 350 feet, depending on configuration and power.

The following performance figures were obtained during FAA type tests and may be realized under conditions indicated with the airplane and engine in good condition and with average piloting technique. All performance is given for 2550 pounds. Stall speeds at lower weights will be correspondingly less.

Stalling speeds, in mph and knots, power off, versus angle of bank (calibrated airspeed):

| Angle of Bank |     | 0° | 20° | 40° | 50° | 60° |
|---------------|-----|----|-----|-----|-----|-----|
| Flaps Up      | MPH | 68 | 70  | 78  | 85  | 96  |
|               | KTS | 59 | 61  | 68  | 74  | 83  |
| Flaps Down    | MPH | 61 |     |     |     |     |
|               | KTS | 53 |     |     |     |     |

#### NOTE

The stall warning system is inoperative with the master switch "OFF."

During preflight, the stall warning system should be checked by turning the master switch "ON," lifting the detector and checking to determine if the horn is actuated. The master switch should be returned to the "OFF" position after the check is complete.

#### **4.37 TURBULENT AIR OPERATION**

In keeping with good operating practice used in all aircraft, it is recommended that when turbulent air is encountered or expected, the airspeed be reduced to maneuvering speed to reduce the structural loads caused by gusts and to allow for inadvertent speed build-ups which may occur as a result of the turbulence or of distractions caused by the conditions.

#### **4.39 WEIGHT AND BALANCE**

It is the responsibility of the owner and pilot to determine that the airplane remains within the allowable weight vs. center of gravity envelope while in flight.

For weight and balance data, refer to Section 6 (Weight and Balance).



## **TABLE OF CONTENTS**

### **SECTION 5**

#### **PERFORMANCE**

| <b>Paragraph<br/>No.</b> |                                                       | <b>Page<br/>No.</b> |
|--------------------------|-------------------------------------------------------|---------------------|
| 5.1                      | General .....                                         | 5-1                 |
| 5.3                      | Introduction to Performance and Flight Planning ..... | 5-1                 |
| 5.5                      | Flight Planning Example.....                          | 5-3                 |
| 5.7                      | Performance Graphs.....                               | 5-9                 |
|                          | List of Figures .....                                 | 5-9                 |

**SECTION 5  
PERFORMANCE**

**5.1 GENERAL**

All of the required (FAA regulations) and complementary performance information applicable to the Cherokee Archer II is provided by this section.

Performance information associated with those optional systems and equipment which require handbook supplements is provided by Section 9 (Supplements).

**5.3 INTRODUCTION TO PERFORMANCE AND FLIGHT PLANNING**

The performance information presented in this section is based on measured Flight Test Data corrected to I.C.A.O. standard day conditions and analytically expanded for the various parameters of weight, altitude, temperature, etc.

The performance charts are unfactored and do not make any allowance for varying degrees of pilot proficiency or mechanical deterioration of the aircraft. This performance, however, can be duplicated by following the stated procedures in a properly maintained airplane.

Effects of conditions not considered on the charts must be evaluated by the pilot, such as the effect of soft or grass runway surface on takeoff and landing performance, or the effect of winds aloft on cruise and range performance. Endurance can be grossly affected by improper leaning procedures, and inflight fuel flow and quantity checks are recommended.

**REMEMBER!** To get chart performance, follow the chart procedures.

The information provided by paragraph 5.5 (Flight Planning Example) outlines a detailed flight plan using the performance charts in this section. Each chart includes its own example to show how it is used.

THIS PAGE INTENTIONALLY LEFT BLANK

## 5.5 FLIGHT PLANNING EXAMPLE

### (a) Aircraft Loading

The first step in planning our flight is to calculate the airplane weight and center of gravity by utilizing the information provided by Section 6 (Weight and Balance) of this handbook.

The basic empty weight for the airplane as delivered from the factory has been entered in Figure 6-5. If any alterations to the airplane have been made effecting weight and balance, reference to the aircraft logbook and Weight and Balance Record (Figure 6-7) should be made to determine the current basic empty weight of the airplane.

Make use of the Weight and Balance Loading Form (Figure 6-13) and the C.G. Range and Weight graph (Figure 6-15) to determine the total weight of the airplane and the center of gravity position.

After proper utilization of the information provided we have found the following weights for consideration in our flight planning example.

The landing weight cannot be determined until the weight of the fuel to be used has been established [refer to item (g)(1)].

|                                                 |           |
|-------------------------------------------------|-----------|
| (1) Basic Empty Weight                          | 1400 lbs. |
| (2) Occupants (2 x 170 lbs)                     | 340 lbs.  |
| (3) Baggage and Cargo                           | 360 lbs.  |
| (4) Fuel (6 lb/gal x 50)                        | 300 lbs.  |
| (5) Takeoff Weight                              | 2400 lbs. |
| (6) Landing Weight                              |           |
| (a)(5) minus (g)(1), (2400 lbs. minus 135 lbs.) | 2265 lbs. |

Our takeoff weight is below the maximum of 2550 lbs. and our weight and balance calculations have determined our C.G. position within the approved limits.

### (b) Takeoff and Landing

Now that we have determined our aircraft loading, we must consider all aspects of our takeoff and landing.

All of the existing conditions at the departure and destination airport must be acquired, evaluated and maintained throughout the flight.

Apply the departure airport conditions and takeoff weight to the appropriate Takeoff Performance graph (Figure 5-5 or 5-7) to determine the length of runway necessary for the takeoff and/or the barrier distance.

The landing distance calculations are performed in the same manner using the existing conditions at the destination airport and, when established, the landing weight.

**SECTION 5**  
**PERFORMANCE**

**PIPER AIRCRAFT CORPORATION**  
**PA-28-181, CHEROKEE ARCHER II**

The conditions and calculations for our example flight are listed below. The takeoff and landing distances required for our example flight have fallen well below the available runway lengths.

|                             | Departure<br>Airport | Destination<br>Airport |
|-----------------------------|----------------------|------------------------|
| (1) Elevation               | 2000 ft.             | 2300 ft.               |
| (2) Temperature             | 70°F                 | 70°F                   |
| (3) Wind Component          | 8 KTS                | 5 KTS                  |
| (4) Runway Length Available | 7000 ft.             | 4500 ft.               |
| (5) Runway Required         | 1860 ft.*            | 1290**                 |

**NOTE**

The remainder of the performance charts used in this flight plan example assume a no wind condition. The effect of winds aloft must be considered by the pilot when computing climb, cruise and descent performance.

**(c) Climb**

The next step in our flight plan is to determine the necessary climb segment components.

The desired cruise altitude and corresponding cruise temperature values are the first variables to be considered in determining the climb components from the Time, Distance, and Fuel to Climb graph (Figure 5-11). After the time, distance and fuel for the cruise altitude and temperature values have been established, apply the existing conditions at the departure field to graph (Figure 5-11). Now, subtract the values obtained from the graph for the field of departure conditions from those for the cruise elevation.

The remaining values are the true fuel, distance and time components for the climb segment of the flight plan corrected for field altitude and temperature.

The following values were determined from the above instructions in our flight planning example.

|                                                    |             |
|----------------------------------------------------|-------------|
| (1) Cruise Altitude                                | 6000 ft.    |
| (2) Cruise Altitude Temperature                    | 55°F        |
| (3) Time to Climb (12.5 min. minus 4.5 min.)       | 8 min.***   |
| (4) Distance to Climb (20.5 miles minus 7.5 miles) | 13 miles*** |
| (5) Fuel to Climb (3 gal. minus 1 gal.)            | 2 gal.***   |

\* reference Figure 5-5

\*\* reference Figure 5-29

\*\*\* reference Figure 5-11

(d) Descent

The descent data will be determined prior to the cruise data to provide the descent distance for establishing the total cruise distance.

Utilizing the cruise altitude and temperature we determine the basic time, distance and fuel for descent (Figure 5-25). These figures must be adjusted for the field elevation and temperature at the destination airport. To find the necessary adjustment values, use the existing altitude and temperature conditions at the destination airport as variables to find the time, distance and fuel values from the graph (Figure 5-25). Now, subtract the values obtained from the field conditions from the values obtained from the cruise conditions to find the true time, distance and fuel values needed for the flight plan.

The values obtained by proper utilization of the graphs for the descent segment of our example are shown below.

|                                                       |           |
|-------------------------------------------------------|-----------|
| (1) Time to Descend (17 min. minus 10.5 min.)         | 6.5 min.* |
| (2) Distance to Descend (40.5 miles minus 25.5 miles) | 15 miles* |
| (3) Fuel to Descend (1.7 gal. minus 1 gal.)           | .7 gal.*  |

(e) Cruise

Using the total distance to be traveled during the flight, subtract the previously calculated distance to climb and distance to descend to establish the total cruise distance. Refer to the appropriate Avco Lycoming Operator's Manual when selecting the cruise power setting. The established altitude and temperature values and the selected cruise power should now be utilized to determine the true airspeed from the appropriate Speed Power graph (Figure 5-15 or 5-17).

Calculate the cruise fuel flow for the cruise power setting from the information provided by the Avco Lycoming Operator's Manual.

The cruise time is found by dividing the cruise distance by the cruise speed and the cruise fuel is found by multiplying the cruise fuel flow by the cruise time.

The cruise calculations established for the cruise segment of our flight planning example are as follows:

|                                                                             |                 |
|-----------------------------------------------------------------------------|-----------------|
| (1) Total Distance                                                          | 360 miles       |
| (2) Cruise Distance                                                         |                 |
| (e)(1) minus (c)(4) minus (d)(2), (360 miles minus 13 miles minus 15 miles) | 332 miles       |
| (3) Cruise Power                                                            | 65% rated power |
| (4) Cruise Speed                                                            | 127 MPH TAS**   |
| (5) Cruise Fuel Consumption                                                 | 7.6 GPH         |
| (6) Cruise Time                                                             |                 |
| (e)(2) divided by (e)(4), (332 miles divided by 127 MPH)                    | 2.62 hrs.       |
| (7) Cruise Fuel                                                             |                 |
| (e)(5) multiplied by (c)(6), (7.6 GPH multiplied by 2.62 hrs.)              | 19.8 gal.       |

\* reference Figure 5-25

\*\* reference Figure 5-17

(f) Total Flight Time

The total flight time is determined by adding the time to climb, the time to descend and the cruise time. Remember! The time values taken from the climb and descent graphs are in minutes and must be converted to hours before adding them to the cruise time.

The following flight time is required for our flight planning example.

(1) Total Flight Time  
(c)(3) plus (d)(1) plus (e)(6), (.13 hrs. plus .11 hrs. plus 2.62 hrs.) 2.86 hrs.

(g) Total Fuel Required

Determine the total fuel required by adding the fuel to climb, the fuel to descend and the cruise fuel. When the total fuel (in gallons) is determined, multiply this value by 6 lb/gal to determine the total fuel weight used for the flight.

The total fuel calculations for our example flight plan are shown below.

(1) Total Fuel Required  
(c)(5) plus (d)(3) plus (e)(7), (2 gal. plus .7 gal. plus 19.8 gal.) 22.5 gal.  
(22.5 gal. multiplied by 6 lb/gal.) 135 lbs.

THIS PAGE INTENTIONALLY LEFT BLANK



THIS PAGE INTENTIONALLY LEFT BLANK

5.7 PERFORMANCE GRAPHS

LIST OF FIGURES


| Figure<br>No. |                                          | Page<br>No. |
|---------------|------------------------------------------|-------------|
| 5-1           | Airspeed System Calibration .....        | 5-11        |
| 5-3           | Stall Speeds .....                       | 5-12        |
| 5-5           | Flaps Up Takeoff Performance .....       | 5-13        |
| 5-6           | Flaps Up Takeoff Ground Roll .....       | 5-14        |
| 5-7           | 25° Flaps Takeoff Performance .....      | 5-14a       |
| 5-8           | 25° Flaps Takeoff Ground Roll .....      | 5-14b       |
| 5-9           | Climb Performance .....                  | 5-15        |
| 5-11          | Time, Distance and Fuel to Climb .....   | 5-16        |
| 5-13          | Engine Performance .....                 | 5-17        |
| 5-15          | Speed Power - Performance Cruise .....   | 5-18        |
| 5-17          | Speed Power - Economy Cruise .....       | 5-19        |
| 5-19          | Best Power Mixture - Range .....         | 5-20        |
| 5-21          | Best Economy Mixture - Range .....       | 5-21        |
| 5-23          | Endurance .....                          | 5-22        |
| 5-25          | Time, Distance and Fuel to Descend ..... | 5-23        |
| 5-27          | Glide Range .....                        | 5-24        |
| 5-29          | Landing Performance .....                | 5-25        |
| 5-30          | Landing Ground Roll .....                | 5-26        |

THIS PAGE INTENTIONALLY LEFT BLANK

# PA-28-181

## AIRSPEED SYSTEM CALIBRATION


2250 LBS GROSS WEIGHT

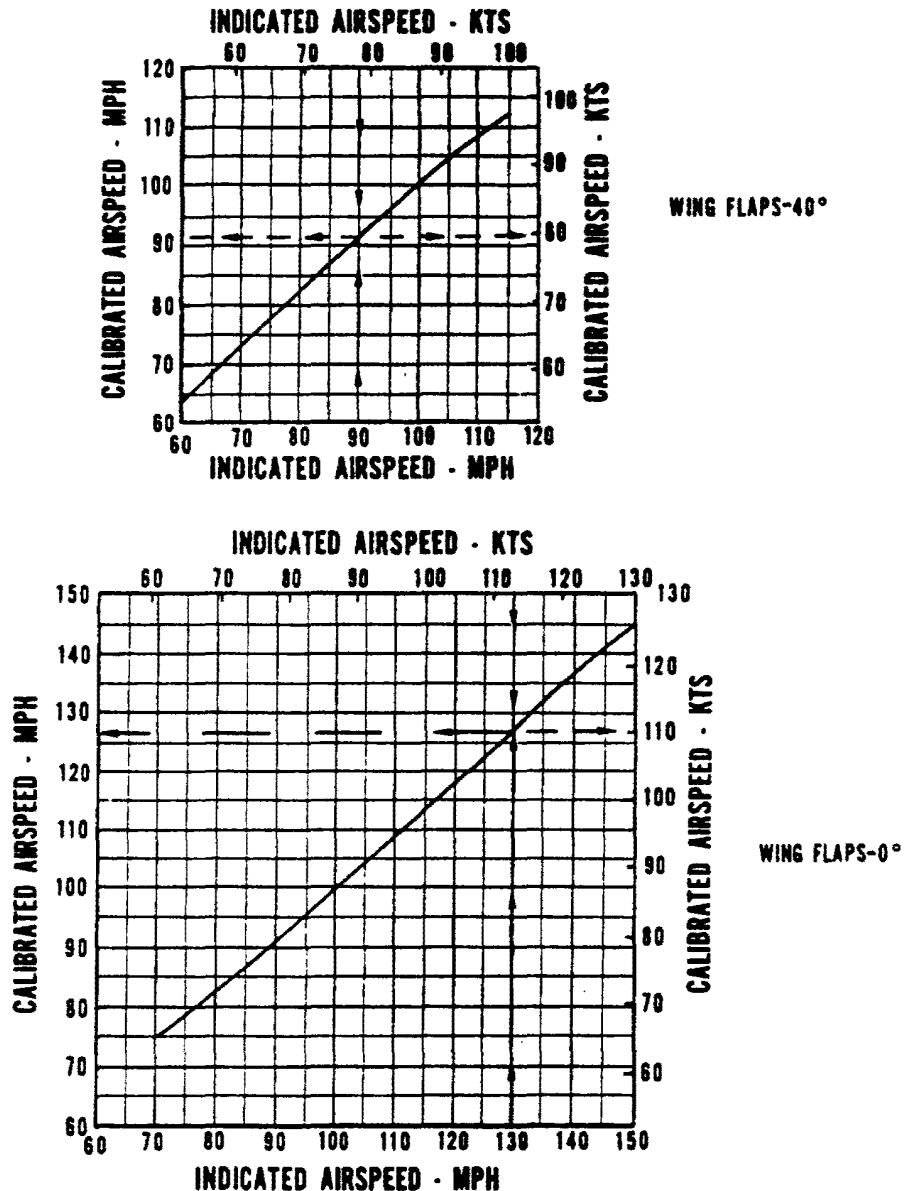

### AIRSPEED SYSTEM CALIBRATION

Figure 5-1

# PA-28-181

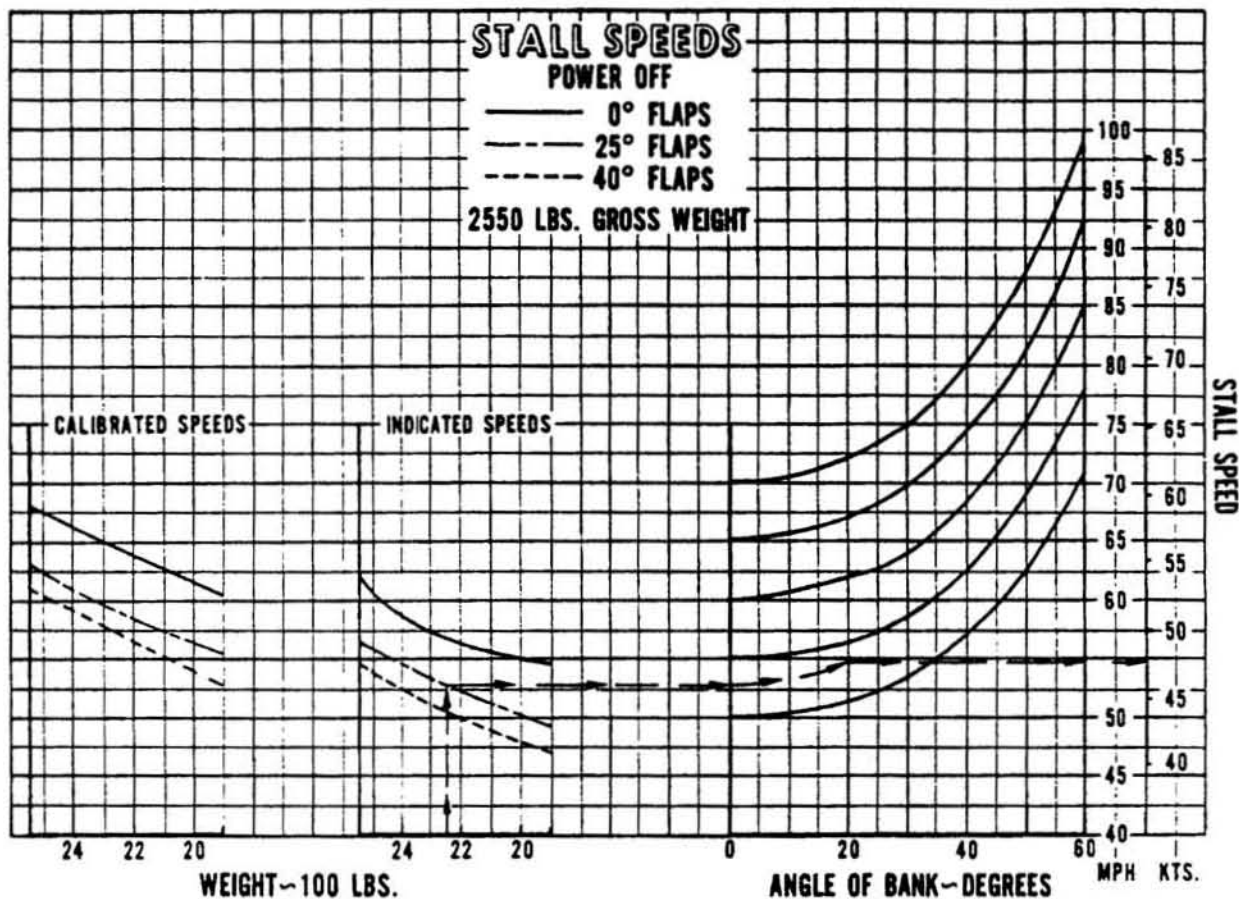

STALL SPEEDS

Figure 5-3

**FLAPS UP TAKEOFF PERFORMANCE**  
 FULL THROTTLE BEFORE BRAKE RELEASE  
 PAVED, LEVEL, DRY RUNWAY


| WT. LBS. | TAKEOFF SPEEDS MPH IAS |        |
|----------|------------------------|--------|
|          | LIFT OFF               | 50 FT. |
| 2550     | 61                     | 67     |
| 2450     | 59                     | 65     |
| 2350     | 58                     | 64     |
| 2250     | 57                     | 63     |
| 2150     | 56                     | 62     |
| 2050     | 55                     | 60     |

**Example:**  
 Airport pressure altitude: 2000 ft

**Example:**  
 Airport pressure altitude: 2000 ft.  
 Temperature: 70°F  
 Wind: 15 knots (headwind)  
 Gross weight: 2400 lbs.  
 Takeoff distance: 1900 ft.

**Figure 5-5**

# PA-28-181

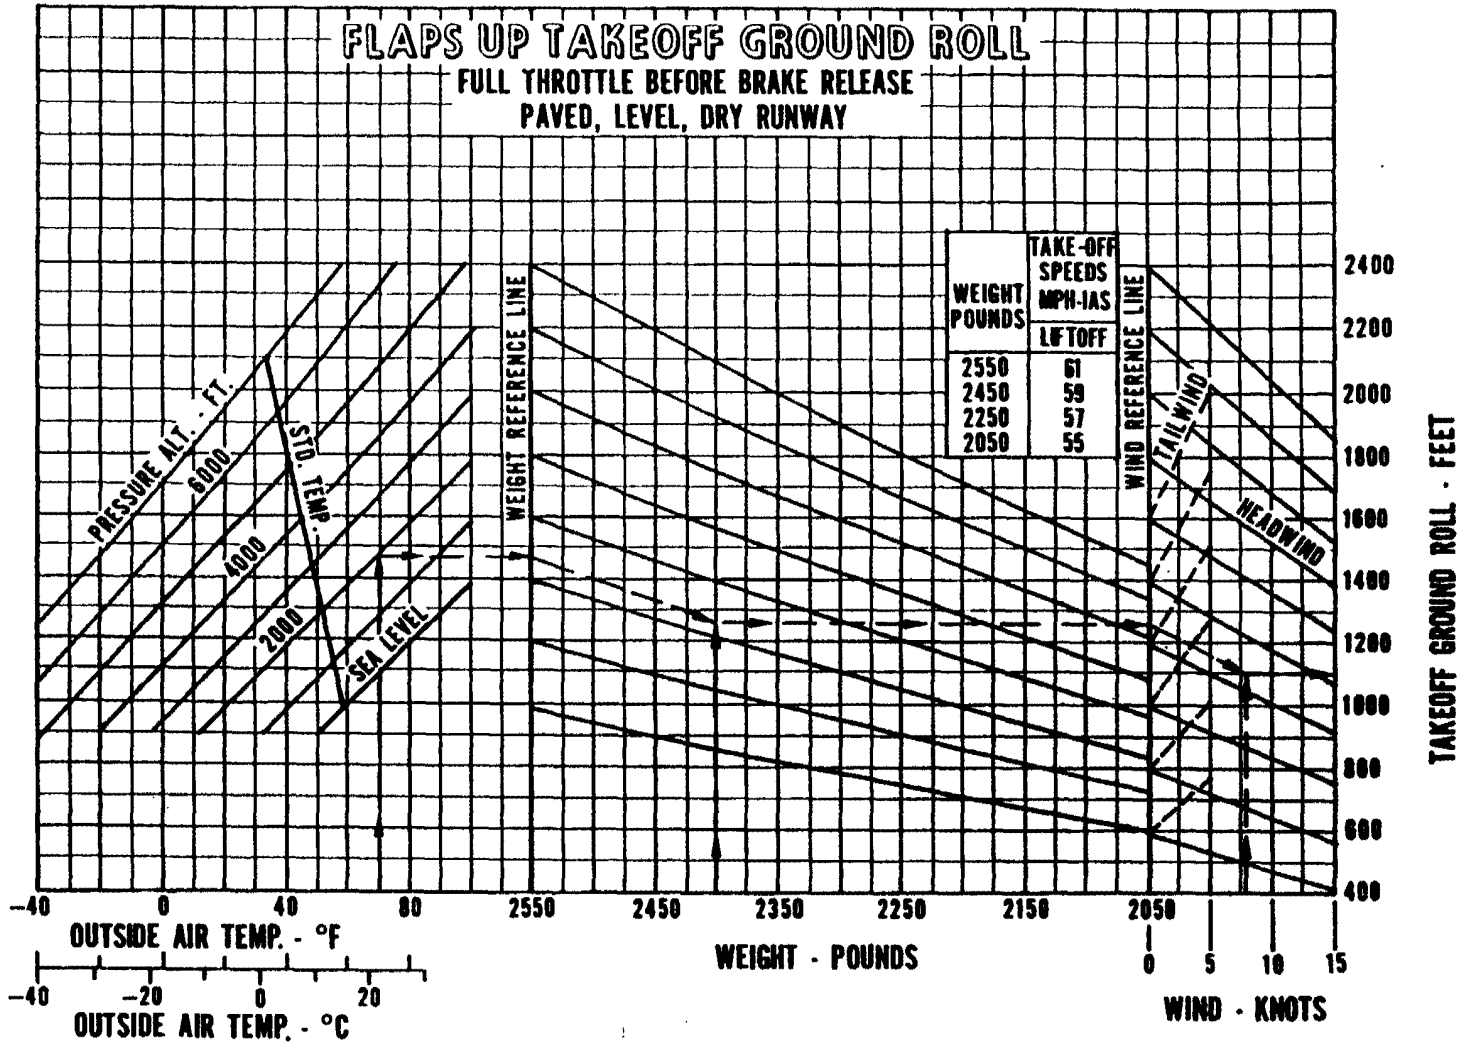


Example:

Airport pressure altitude: 2000 ft.  
Temperature: 70°F  
Gross weight: 2400 lbs.  
Wind: 8 knots (headwind)  
Takeoff ground roll: 1100 ft.

FLAPS UP TAKEOFF GROUND ROLL

Figure 5-6

# PA-28-181

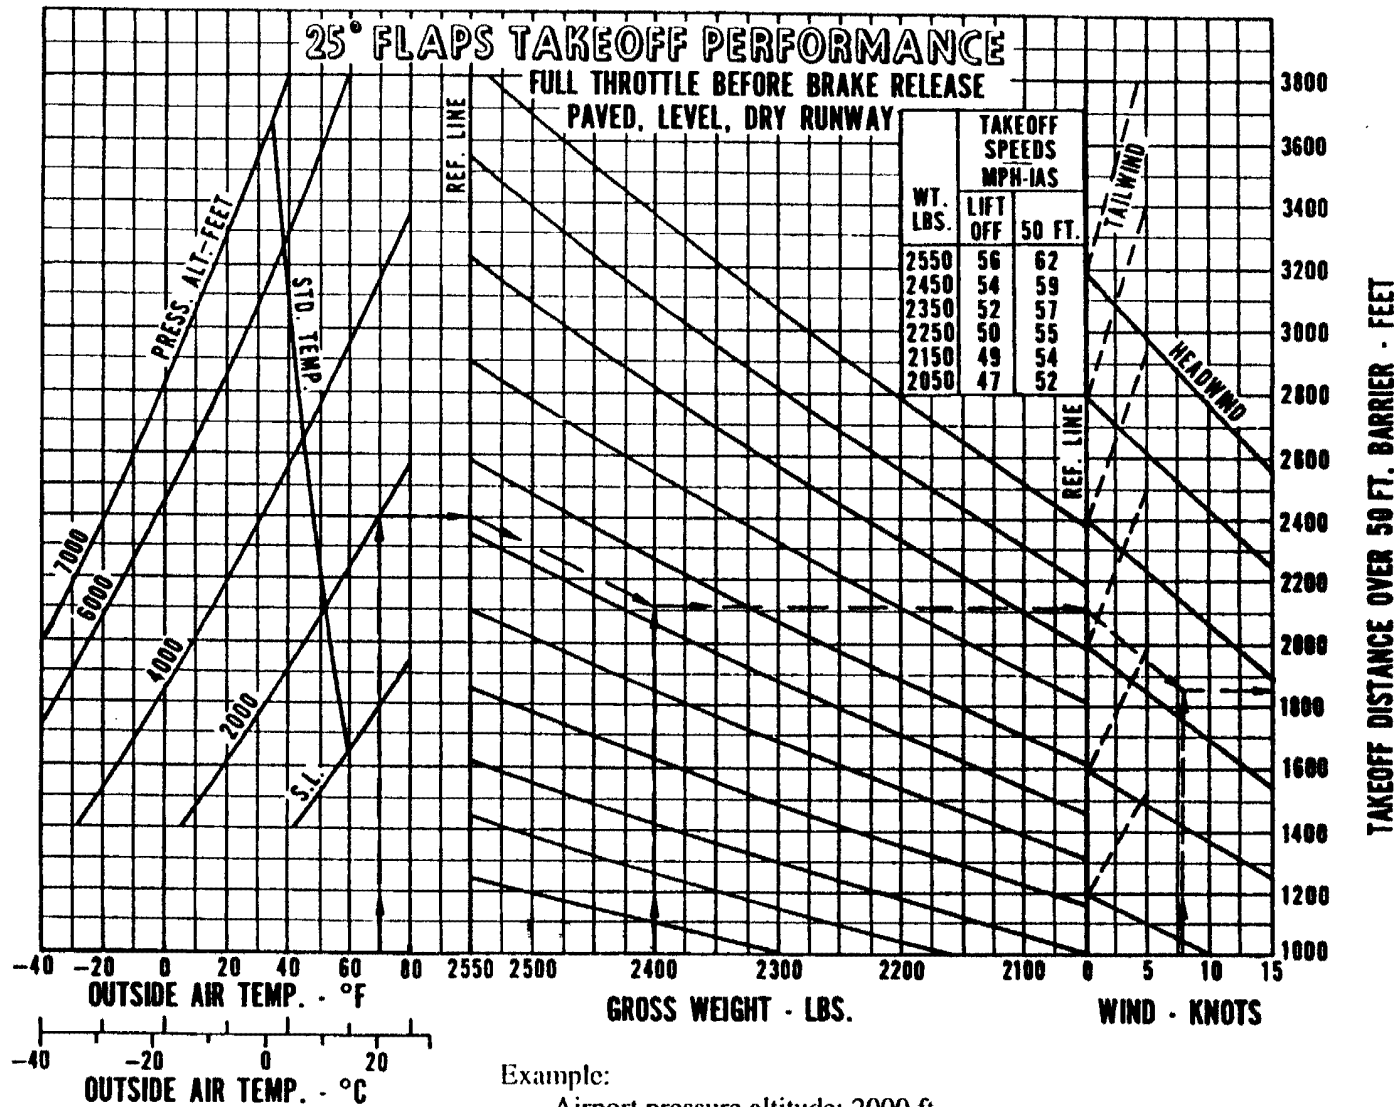


25° FLAPS TAKEOFF PERFORMANCE

Figure 5-7



# PA-28-181

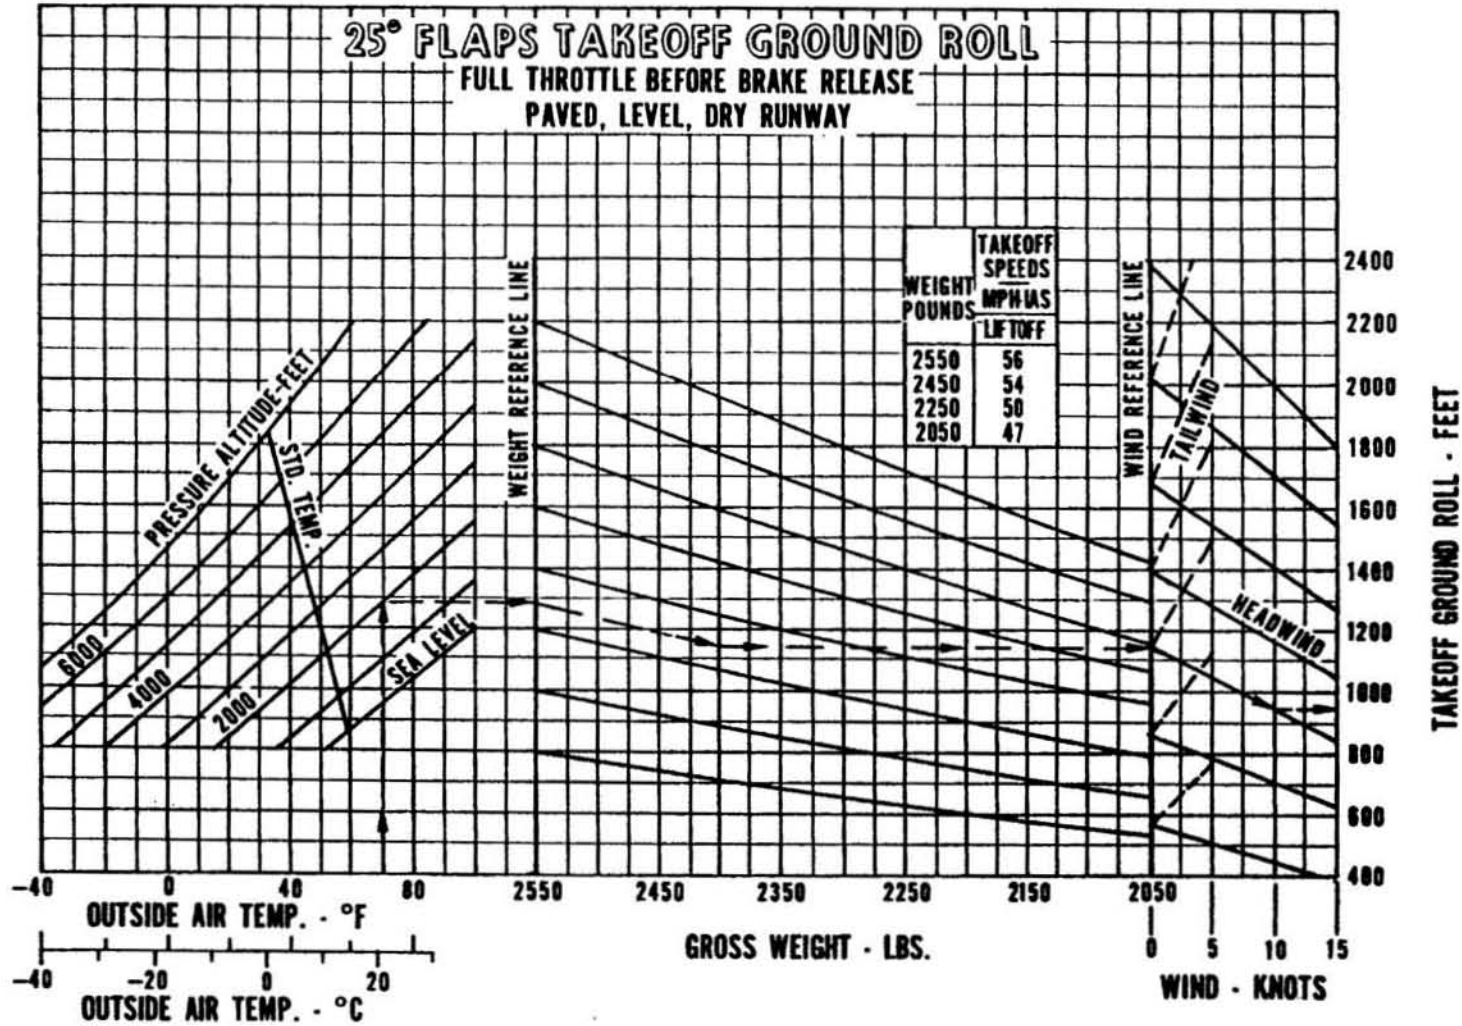


Example:

Airport pressure altitude: 2000 ft.  
Temperature: 70°F  
Gross weight: 2400 lbs.  
Wind: 10 knots (headwind)  
Takeoff ground roll: 950 ft.

25° FLAPS TAKEOFF GROUND ROLL

Figure 5-8


# PA-28-181

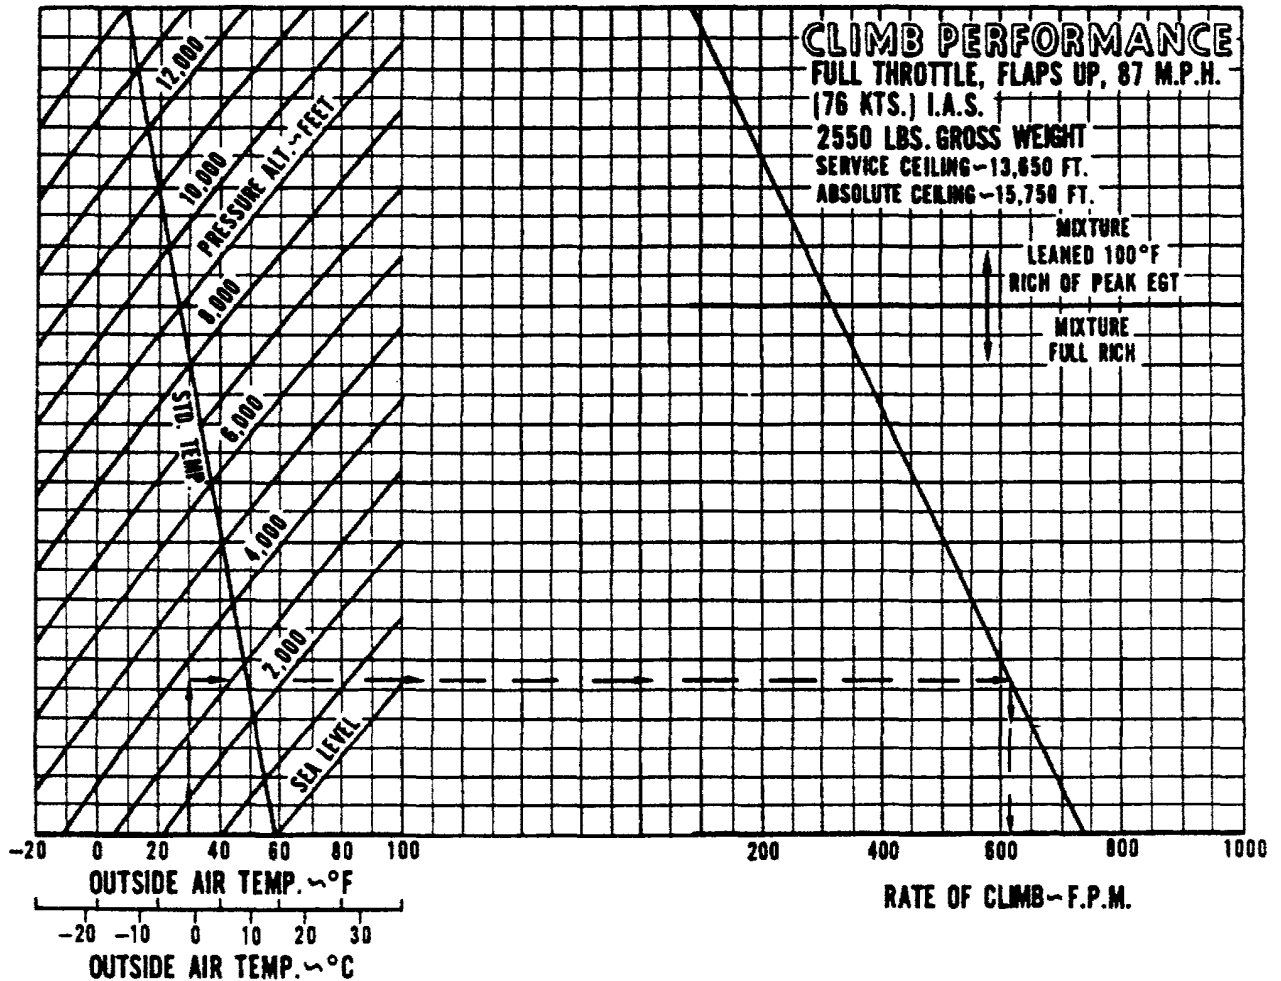

CLIMB PERFORMANCE

Figure 5-9


# PA-28-181

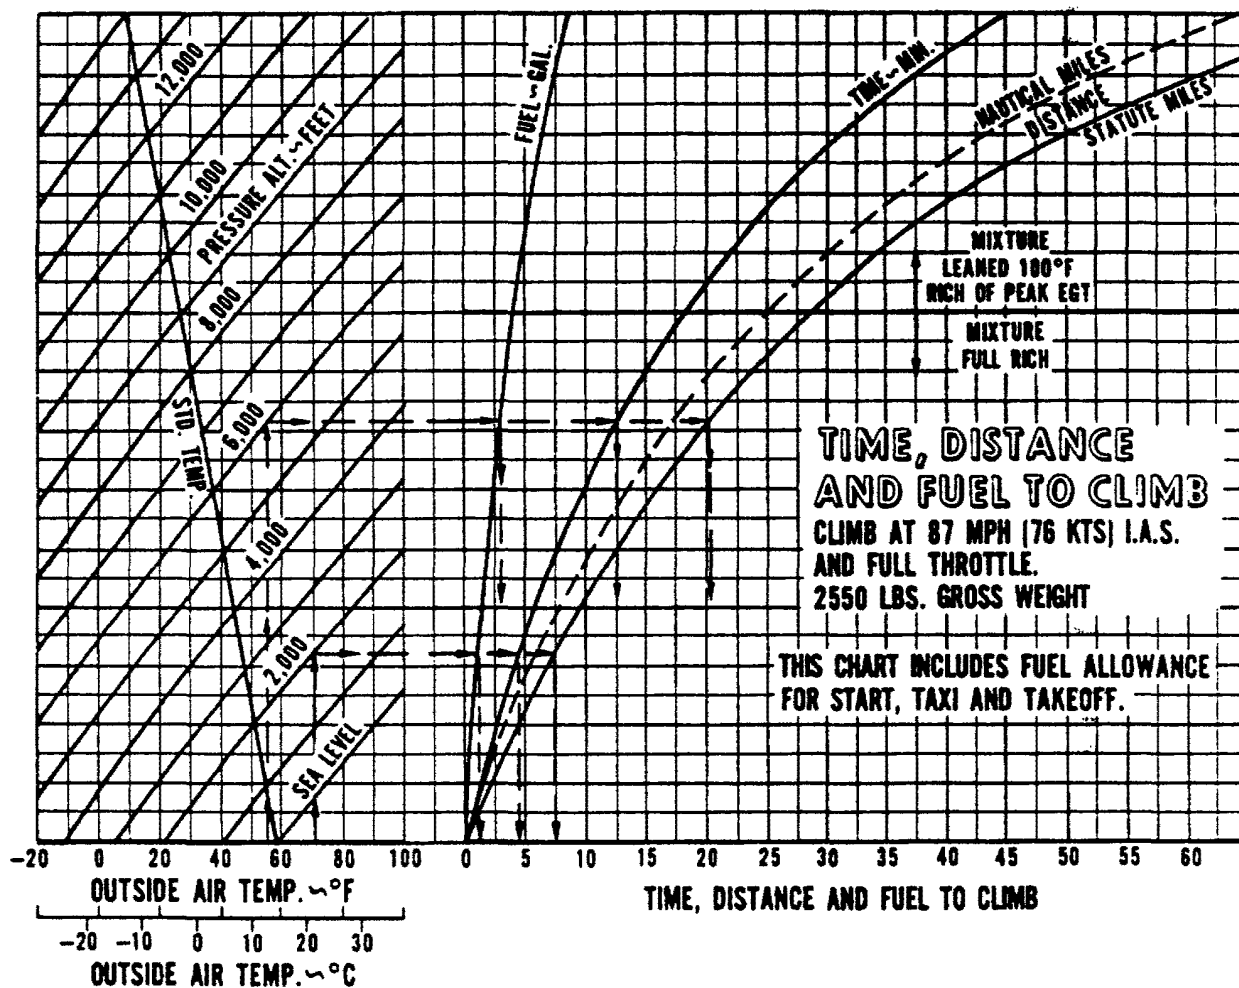

TIME, DISTANCE AND FUEL TO CLIMB

Figure 5-11


# PA-28-181

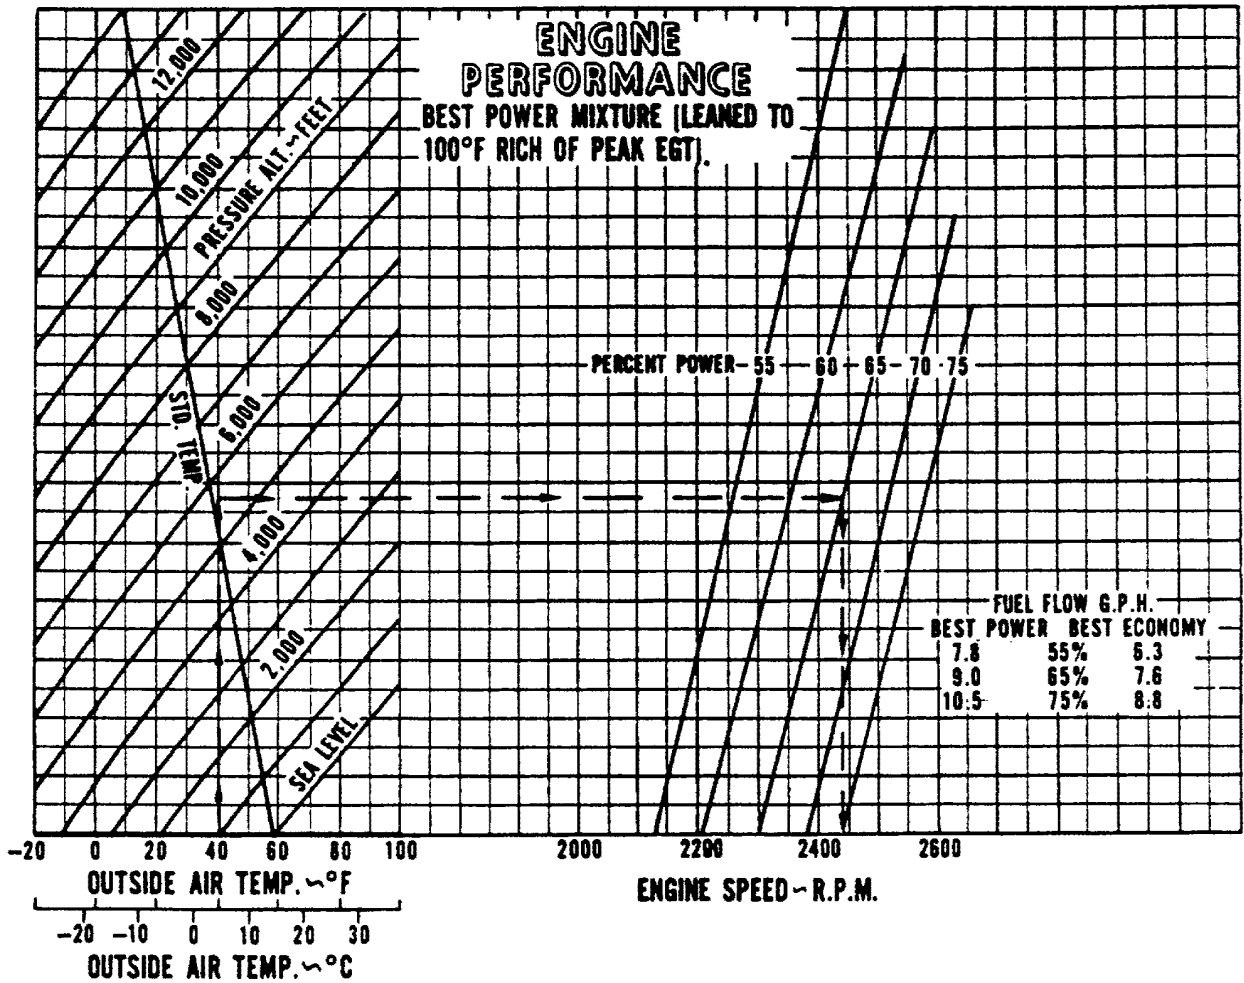

## ENGINE PERFORMANCE

Figure 5-13


# PA-28-181

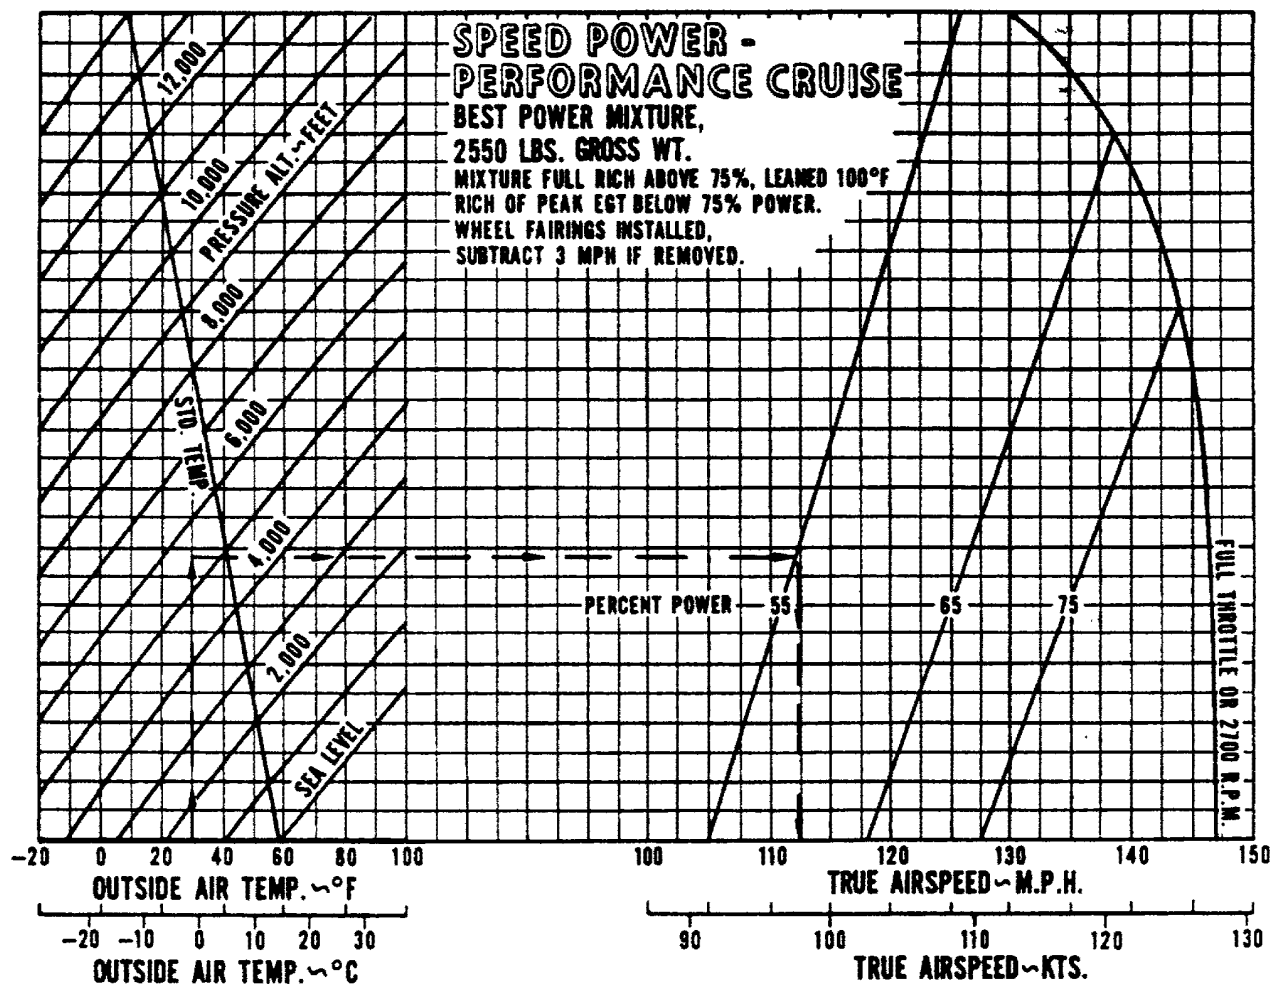

SPEED POWER - PERFORMANCE CRUISE

Figure 5-15


# PA-28-181

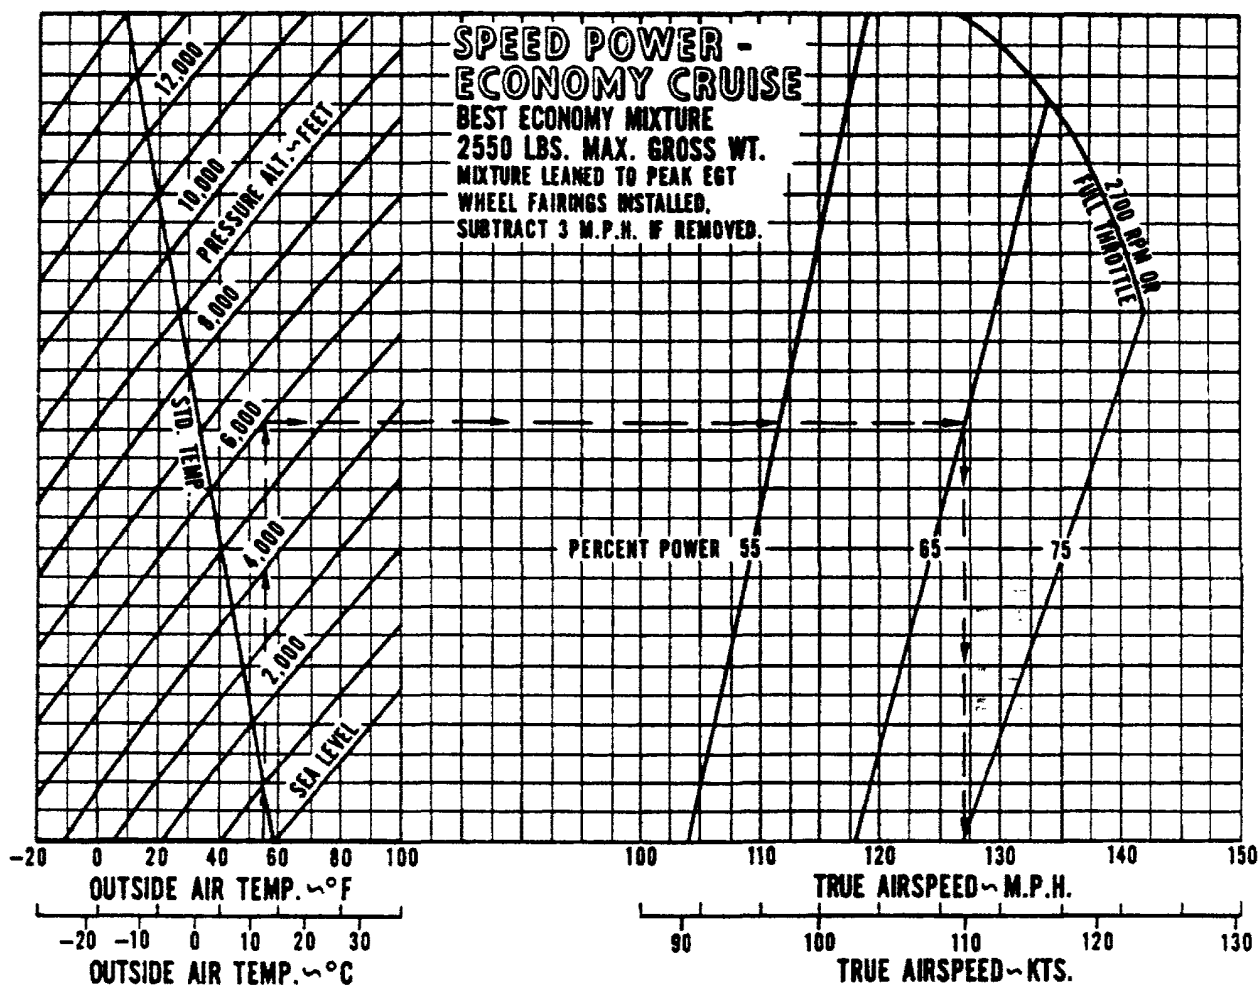

SPEED POWER - ECONOMY CRUISE

Figure 5-17


# PA-28-181

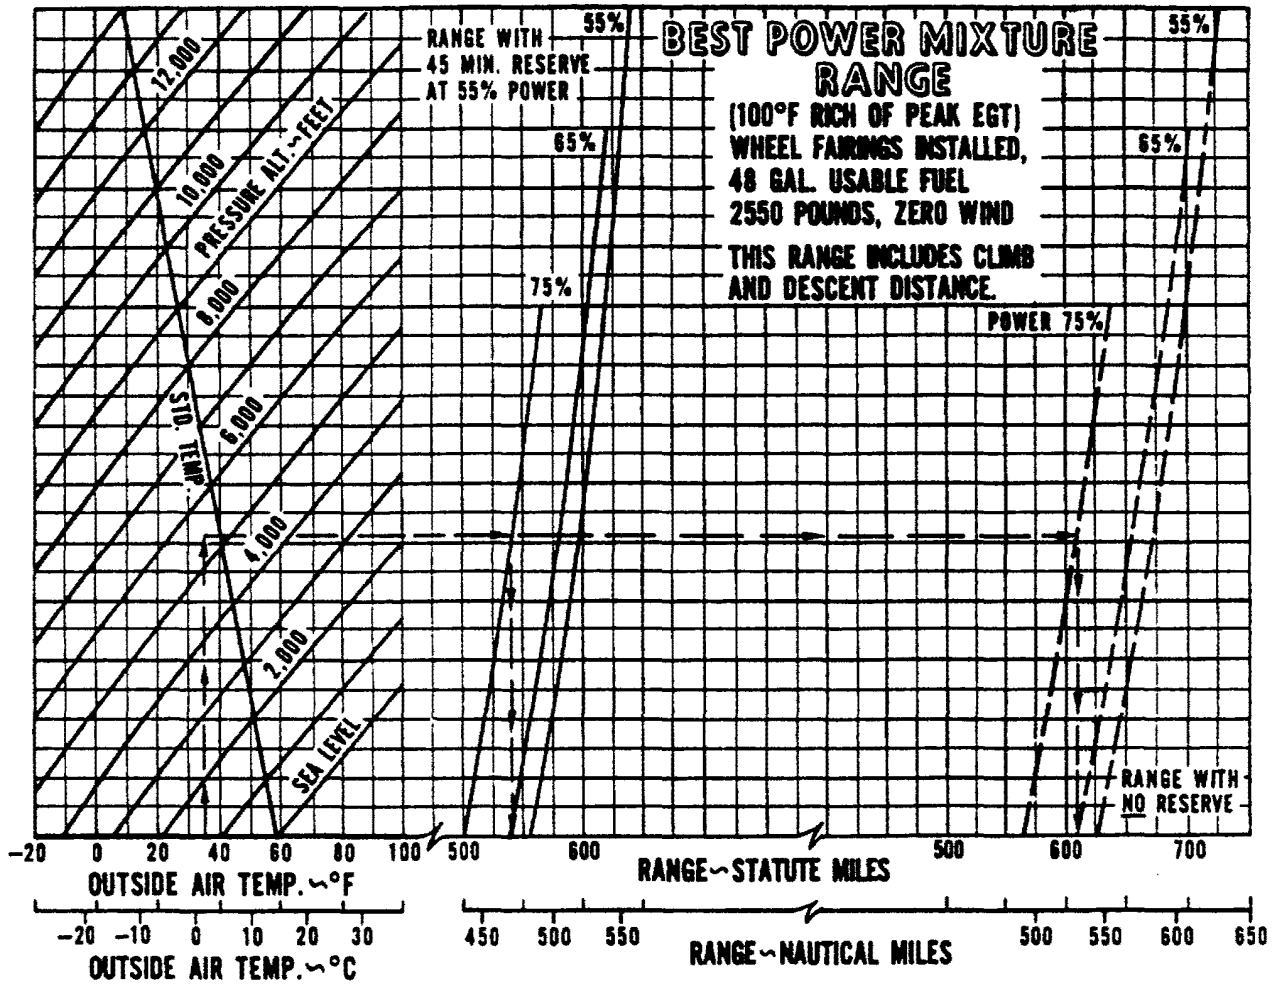

BEST POWER MIXTURE - RANGE

Figure 5-19

# PA-28-181

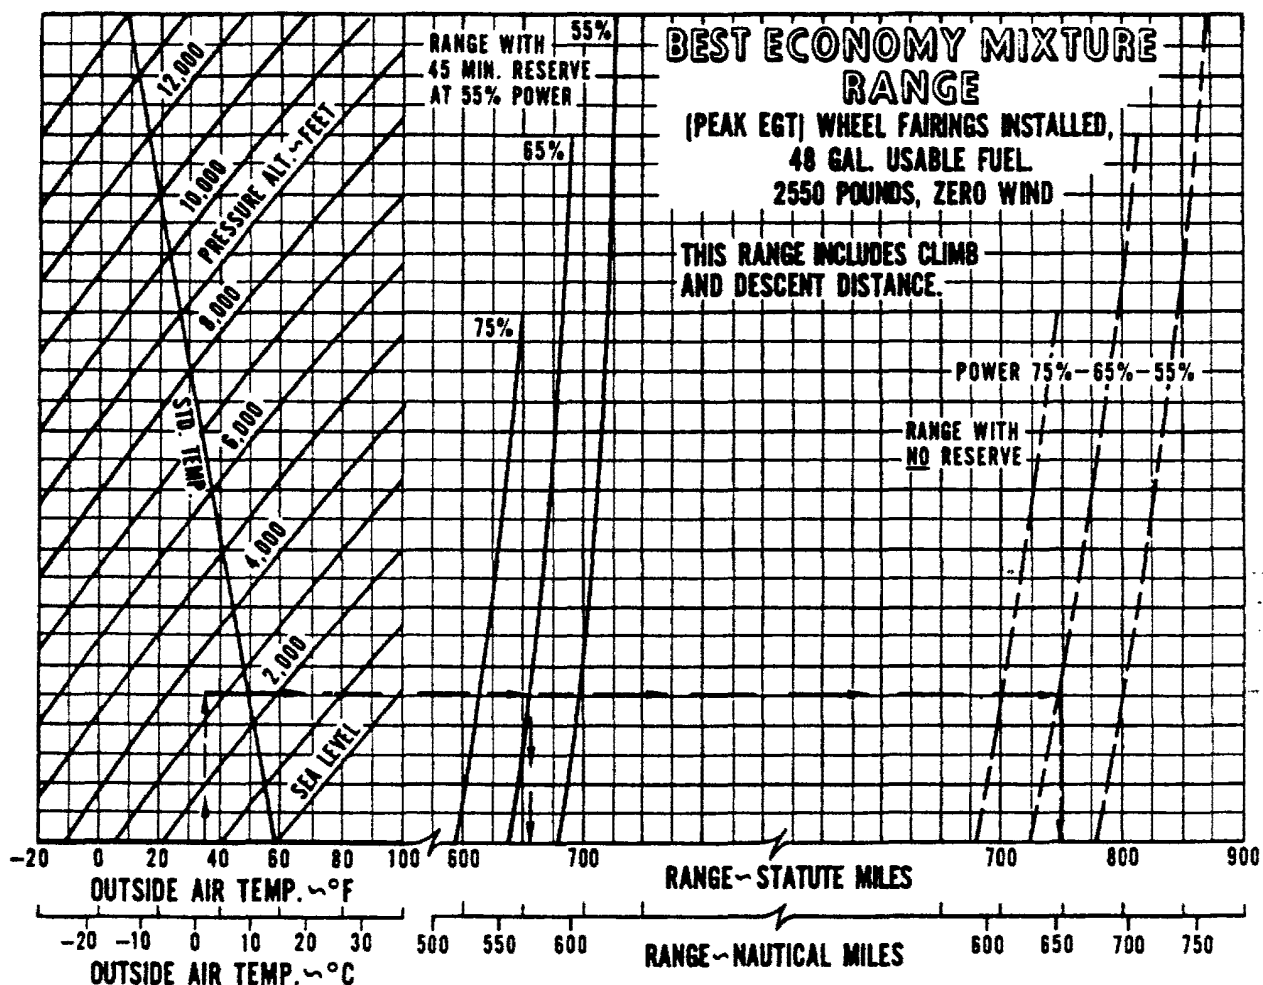


BEST ECONOMY MIXTURE - RANGE

Figure 5-21




# PA-28-181

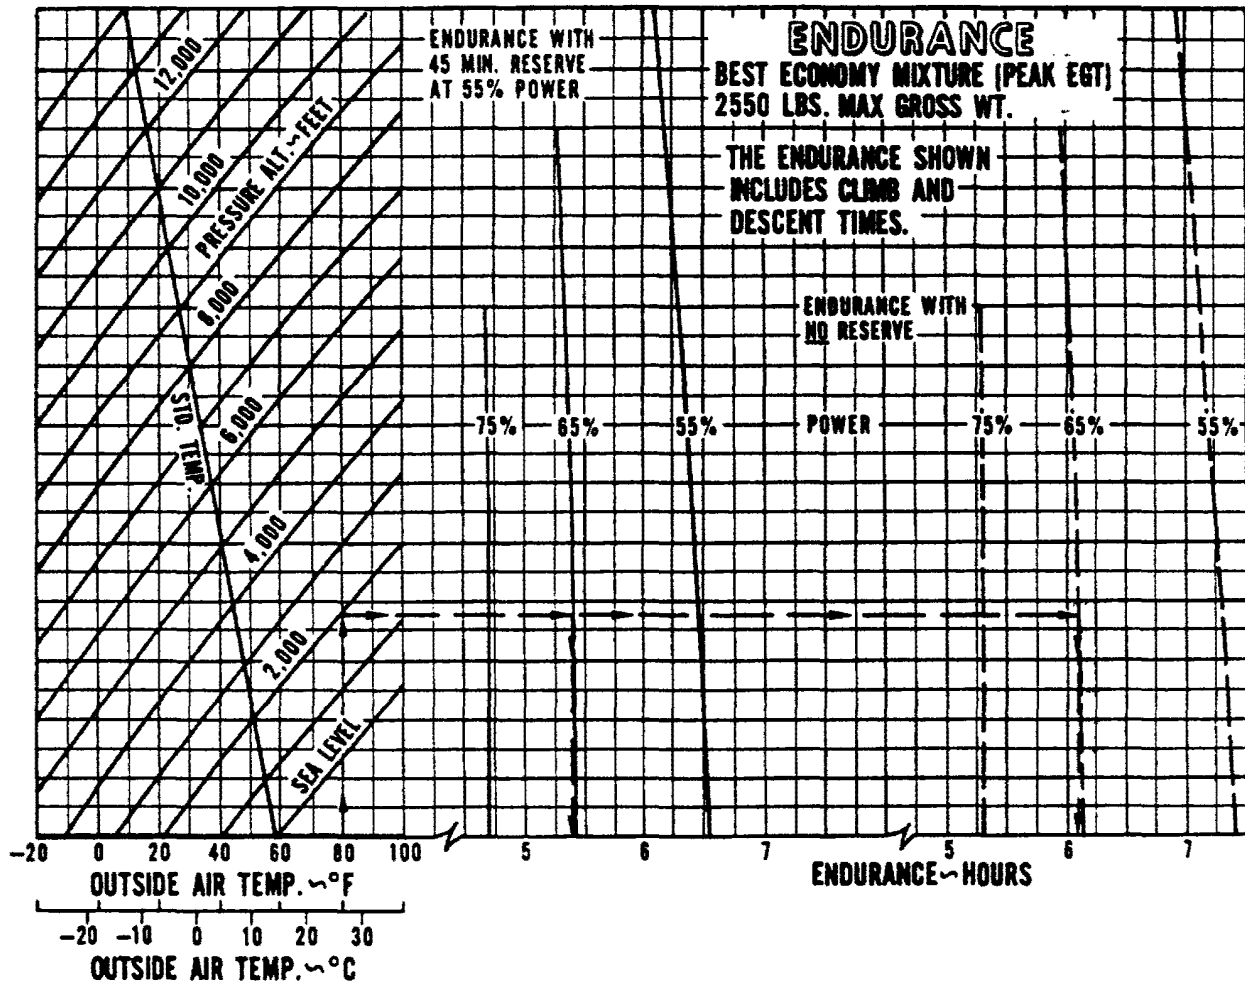

## ENDURANCE

Figure 5-23


# PA-28-181

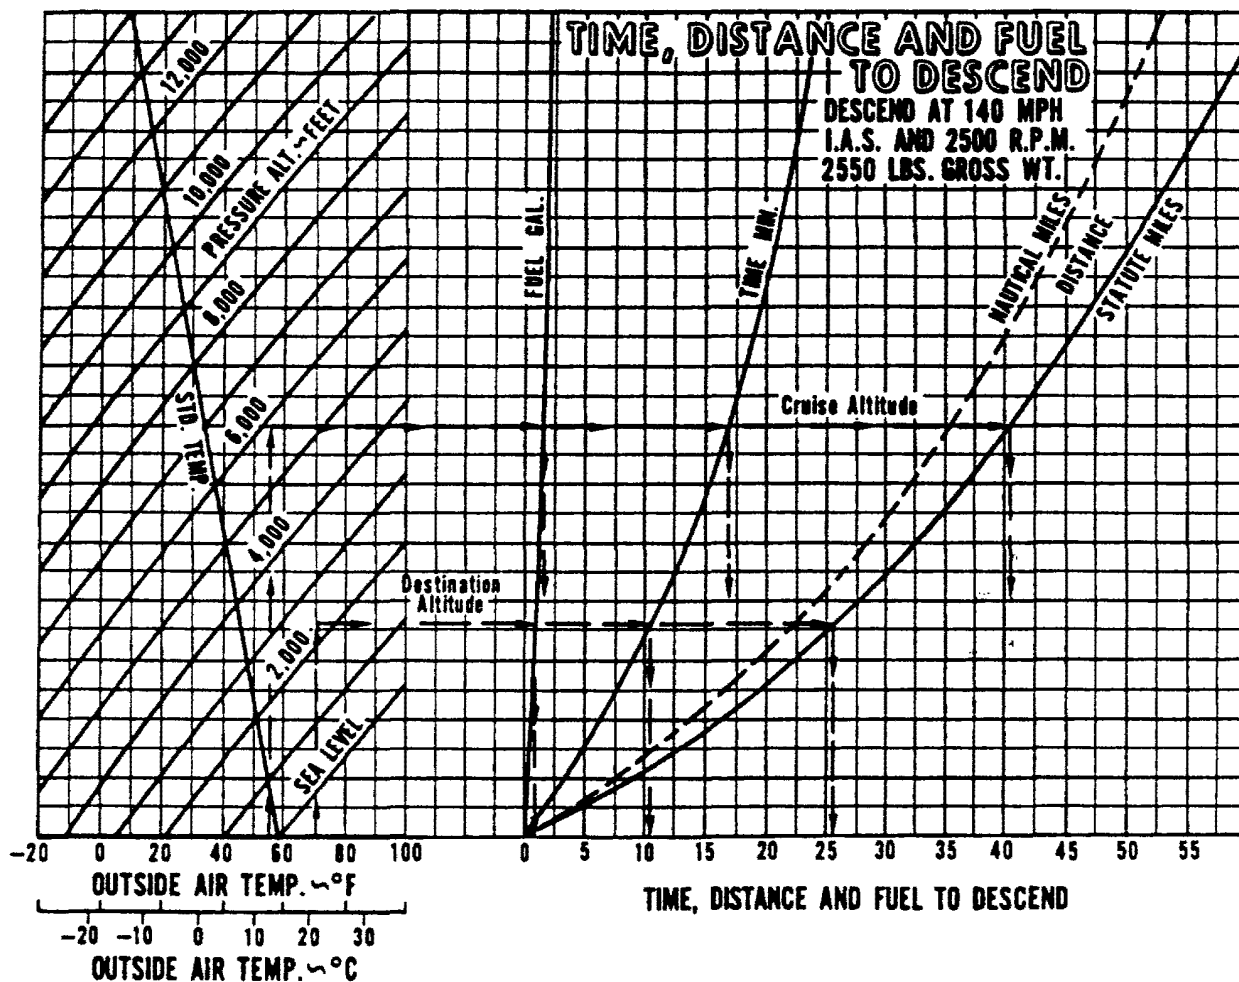

TIME, DISTANCE AND FUEL TO DESCEND

Figure 5-25


# PA-28-181

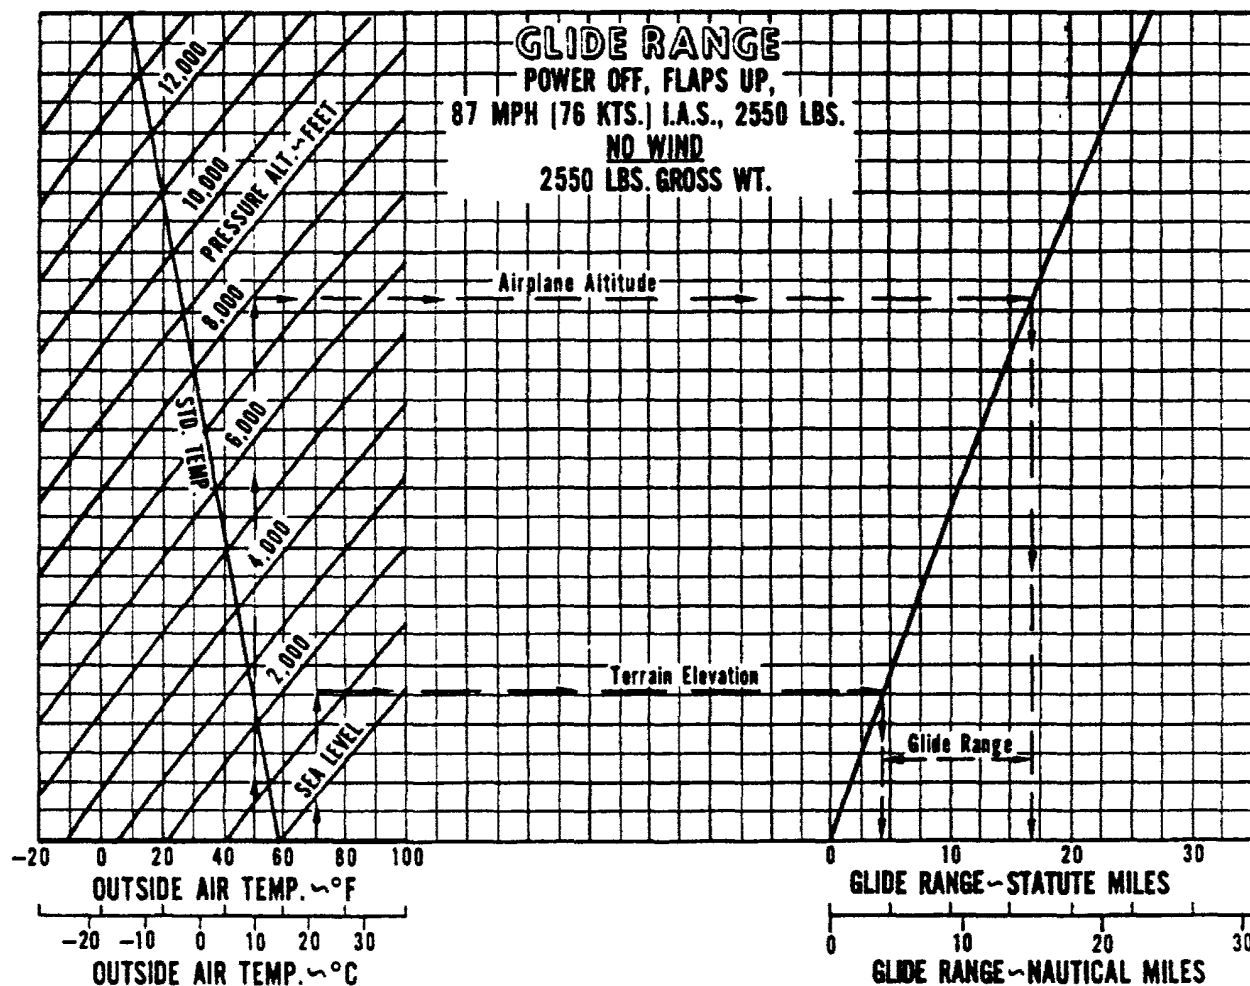

## GLIDE RANGE

Figure 5-27

# PA-28-181

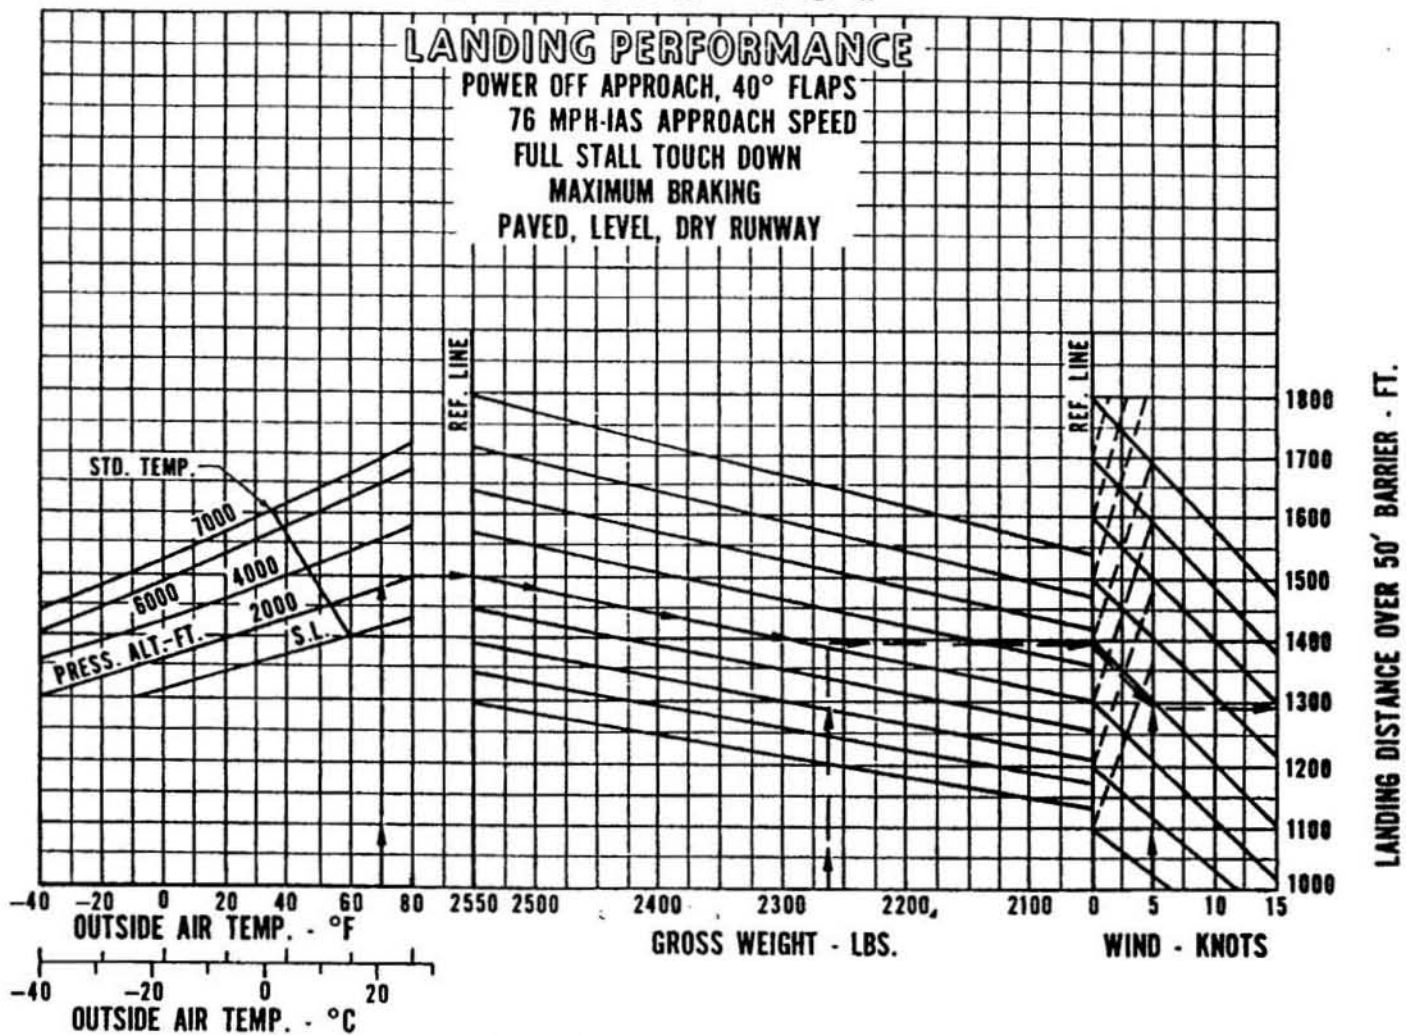


Example:

Airport pressure altitude: 2300 ft.  
Gross weight: 2264 lbs.  
Temperature: 70°F  
Wind: 5 knots (headwind)  
Landing distance: 1290 ft.

LANDING PERFORMANCE

Figure 5-29

# PA-28-181

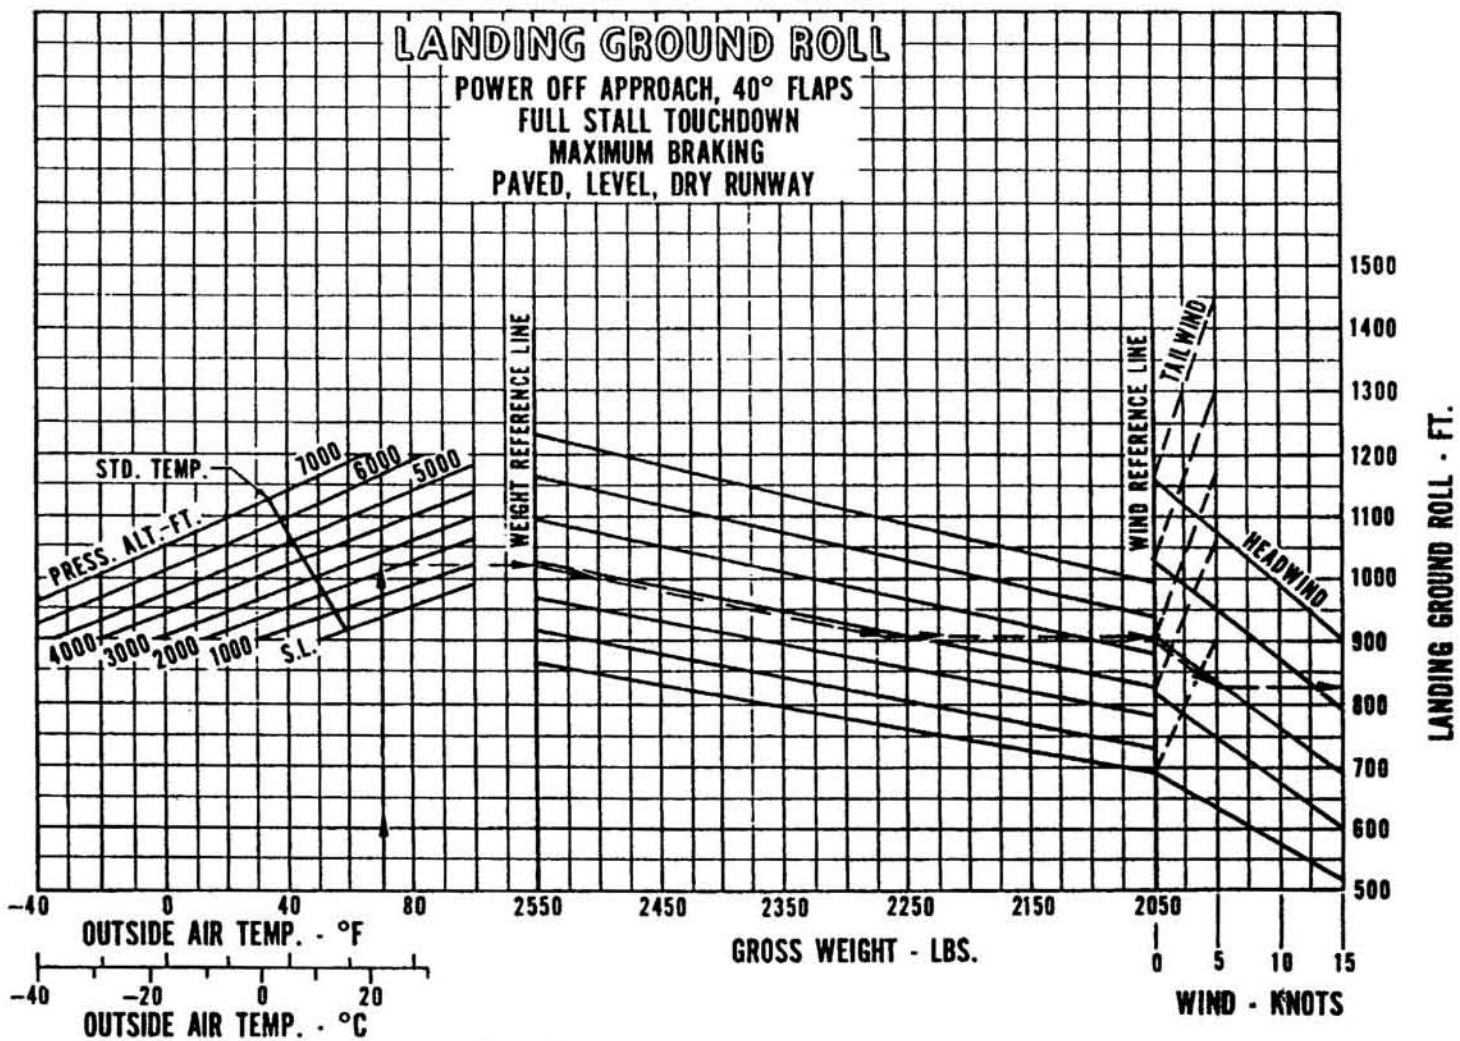

Example:

Airport pressure altitude: 2300 ft.  
Temperature: 70°F  
Gross weight: 2264 lbs.  
Wind: 5 knots (headwind)  
Ground roll: 825 ft.

LANDING GROUND ROLL

Figure 5-30

## TABLE OF CONTENTS

### SECTION 6

#### WEIGHT AND BALANCE

| Paragraph<br>No. |                                                                | Page<br>No. |
|------------------|----------------------------------------------------------------|-------------|
| 6.1              | General .....                                                  | 6-1         |
| 6.3              | Airplane Weighing Procedure .....                              | 6-3         |
| 6.5              | Weight and Balance Data and Record .....                       | 6-6         |
| 6.7              | Weight and Balance Determination for Flight .....              | 6-11        |
| 6.9              | Equipment List .....                                           | 6-17        |
| (a)              | Propeller and Propeller Accessories .....                      | 6-17        |
| (b)              | Engine and Engine Accessories .....                            | 6-19        |
| (c)              | Landing Gear and Brakes .....                                  | 6-21        |
| (d)              | Electrical Equipment .....                                     | 6-23        |
| (e)              | Instruments .....                                              | 6-25        |
| (f)              | Miscellaneous .....                                            | 6-27        |
| (g)              | Engine and Engine Accessories (Optional Equipment) .....       | 6-29        |
| (h)              | Propeller and Propeller Accessories (Optional Equipment) ..... | 6-31        |
| (i)              | Landing Gear and Brakes (Optional Equipment) .....             | 6-33        |
| (j)              | Electrical Equipment (Optional Equipment) .....                | 6-35        |
| (k)              | Instruments (Optional Equipment) .....                         | 6-37        |
| (l)              | Autopilots (Optional Equipment) .....                          | 6-39        |
| (m)              | Radio Equipment (Optional Equipment) .....                     | 6-41        |
| (n)              | Miscellaneous (Optional Equipment) .....                       | 6-49        |

## **SECTION 6**

### **WEIGHT AND BALANCE**

#### **6.1 GENERAL**

In order to achieve the performance and flying characteristics which are designed into the airplane, it must be flown with the weight and center of gravity (C.G.) position within the approved operating range (envelope). Although the airplane offers a tremendous flexibility of loading, you cannot fill the airplane with the maximum number of adult passengers, full fuel tanks and maximum baggage. With the flexibility comes responsibility. The pilot must ensure that the airplane is loaded within the loading envelope before he makes a takeoff.

Misloading carries consequences for any aircraft. An overloaded airplane will not take off, climb or cruise as well as a properly loaded one. The heavier the airplane is loaded, the less climb performance it will have.

Center of gravity is a determining factor in flight characteristics. If the C.G. is too far forward in any airplane, it may be difficult to rotate for takeoff or landing. If the C.G. is too far aft, the airplane may rotate prematurely on takeoff or tend to pitch up during climb. Longitudinal stability will be reduced. This can lead to inadvertent stalls and even spins; and spin recovery becomes more difficult as the center of gravity moves aft of the approved limit.

A properly loaded airplane, however, will perform as intended. Before the airplane is delivered, it is weighed, and a basic empty weight and C.G. location is computed (basic empty weight consists of the standard empty weight of the airplane plus the optional equipment). Using the basic empty weight and C.G. location, the pilot can easily determine the weight and C.G. position for the loaded airplane by computing the total weight and moment and then determining whether they are within the approved envelope.

The basic empty weight and C.G. location are recorded in the Weight and Balance Data Form (Figure 6-5) and the Weight and Balance Record (Figure 6-7). The current values should always be used. Whenever new equipment is added or any modification work is done, the mechanic responsible for the work is required to compute a new basic empty weight and C.G. position and to write these in the Aircraft Log Book and the Weight and Balance Record. The owner should make sure that it is done.

A weight and balance calculation is necessary in determining how much fuel or baggage can be boarded so as to keep the C.G. within allowable limits. Check calculations prior to adding fuel to insure against improper loading.

The following pages are forms used in weighing an airplane in production and in computing basic empty weight, C.G. position, and useful load. Note that the useful load includes usable fuel, baggage, cargo and passengers. Following this is the method for computing takeoff weight and C.G.

THIS PAGE INTENTIONALLY LEFT BLANK



### **6.3 AIRPLANE WEIGHING PROCEDURE**

At the time of delivery, Piper Aircraft Corporation provides each airplane with the basic empty weight and center of gravity location. This data is supplied by Figure 6-5.

The removal or addition of equipment or airplane modifications can affect the basic empty weight and center of gravity. The following is a weighing procedure to determine this basic empty weight and center of gravity location:

**(a) Preparation**

- (1) Be certain that all items checked in the airplane equipment list are installed in the proper location in the airplane.**
- (2) Remove excessive dirt, grease, moisture, foreign items such as rags and tools from the airplane before weighing.**
- (3) Defuel airplane. Then open all fuel drains until all remaining fuel is drained. Operate engine on each tank until all undrainable fuel is used and engine stops. Then add the unusable fuel (2.0 gallons total, 1.0 gallons each wing).**

**CAUTION**

Whenever the fuel system is completely drained and fuel is replenished it will be necessary to run the engine for a minimum of three minutes at 1000 RPM on each tank to insure that no air exists in the fuel supply lines.

- (4) Fill with oil to full capacity.**
- (5) Place pilot and copilot seats in fourth (4th) notch, aft of forward position. Put flaps in the fully retracted position and all control surfaces in the neutral position. Tow bar should be in the proper location and all entrance and baggage doors closed.**
- (6) Weigh the airplane inside a closed building to prevent errors in scale readings due to wind.**

**(b) Leveling**

- (1) With airplane on scales, block main gear oleo pistons in the fully extended position.**
- (2) Level airplane (refer to Figure 6-3) deflating nose wheel tire, to center bubble on level.**

(c) Weighing - Airplane Basic Empty Weight

- (1) With the airplane level and brakes released, record the weight shown on each scale. Deduct the tare, if any, from each reading.


| Scale Position and Symbol          | Scale Reading | Tare | Net Weight |
|------------------------------------|---------------|------|------------|
| Nose Wheel (N)                     |               |      |            |
| Right Main Wheel (R)               |               |      |            |
| Left Main Wheel (L)                |               |      |            |
| Basic Empty Weight, as Weighed (T) | —             | —    |            |

WEIGHING FORM

Figure 6-1

(d) Basic Empty Weight Center of Gravity

- (1) The following geometry applies to the PA-28-181 airplane when it is level. Refer to Leveling paragraph 6.3 (b).

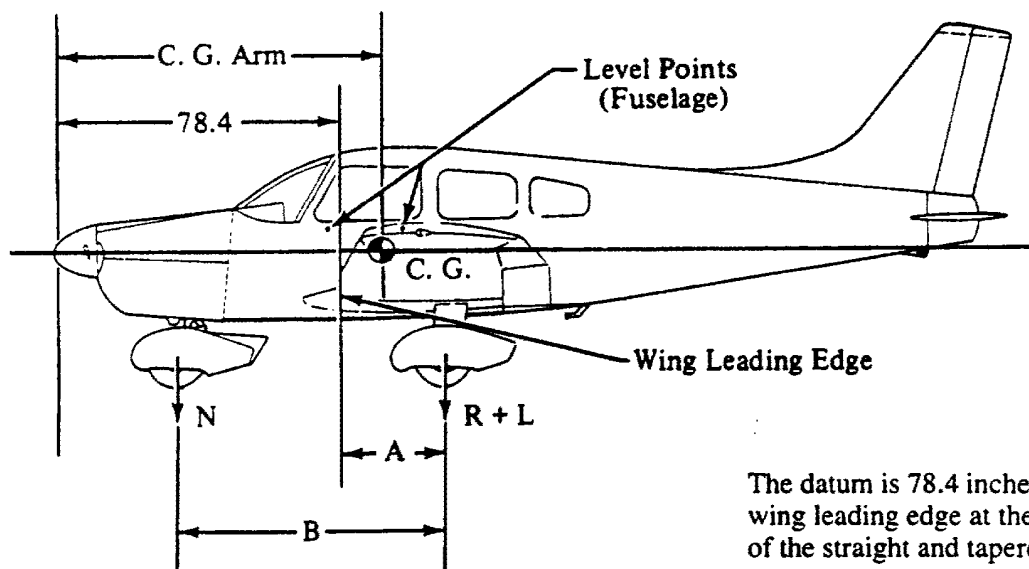

The datum is 78.4 inches ahead of the wing leading edge at the intersection of the straight and tapered section.

A =

B =

LEVELING DIAGRAM

Figure 6-3

- (2) Obtain measurement "A" by measuring from a plumb bob dropped from the wing leading edge, at the intersection of the straight and tapered section, horizontally and parallel to the airplane centerline, to the main wheel centerline.
- (3) Obtain measurement "B" by measuring the distance from the main wheel centerline, horizontally and parallel to the airplane centerline, to each side of the nose wheel axle. Then average the measurements.
- (4) The basic empty weight center of gravity (as weighed including optional equipment, full oil and unusable fuel) can be determined by the following formula:

$$\text{C.G. Arm} = 78.4 + A - \frac{B(N)}{T}$$

$$\text{C.G. Arm} = 78.4 + ( \quad ) - \frac{( \quad ) ( \quad )}{( \quad )} = \quad \text{inches}$$

## **6.5 WEIGHT AND BALANCE DATA AND RECORD**

The Basic Empty Weight, Center of Gravity Location and Useful Load listed in Figure 6-5 are for the airplane as delivered from the factory. These figures apply only to the specific airplane serial number and registration number shown.

The basic empty weight of the airplane as delivered from the factory has been entered in the Weight and Balance Record (Figure 6-7). This form is provided to present the current status of the airplane basic empty weight and a complete history of previous modifications. Any change to the permanently installed equipment or modification which affects weight or moment must be entered in the Weight and Balance Record.

MODEL PA-28-181 CHEROKEE ARCHER II

Airplane Serial Number \_\_\_\_\_

Registration Number \_\_\_\_\_

Date \_\_\_\_\_

AIRPLANE BASIC EMPTY WEIGHT

| Item                   | Weight<br>(Lbs) | x | C. G. Arm<br>(Inches Aft<br>of Datum) | = | Moment<br>(In-Lbs) |
|------------------------|-----------------|---|---------------------------------------|---|--------------------|
| Standard Empty Weight* |                 |   |                                       |   |                    |
| Optional Equipment     |                 |   |                                       |   |                    |
| Basic Empty Weight     |                 |   |                                       |   |                    |

\*The standard empty weight includes full oil capacity and 2.0 gallons of unusable fuel.

AIRPLANE USEFUL LOAD

(Gross Weight) - (Basic Empty Weight) = Useful Load

Normal Category (2550 lbs) - (            lbs) =            lbs.

Utility Category (1950 lbs) - (            lbs) =            lbs.

THIS BASIC EMPTY WEIGHT, C.G. AND USEFUL LOAD ARE FOR THE AIRPLANE AS DELIVERED FROM THE FACTORY. REFER TO APPROPRIATE AIRCRAFT RECORD WHEN ALTERATIONS HAVE BEEN MADE.

WEIGHT AND BALANCE DATA FORM

Figure 6-5

THIS PAGE INTENTIONALLY LEFT BLANK



**PIPER AIRCRAFT CORPORATION  
PA-28-181, CHEROKEE ARCHER II**

[illegible]

Figure 6-7 (cont)



## 6.7 WEIGHT AND BALANCE DETERMINATION FOR FLIGHT

- (a) Add the weight of all items to be loaded to the basic empty weight.
- (b) Use the Loading Graph (Figure 6-13) to determine the moment of all items to be carried in the airplane.
- (c) Add the moment of all items to be loaded to the basic empty weight moment.
- (d) Divide the total moment by the total weight to determine the C.G. location.
- (e) By using the figures of item (a) and item (d) (above), locate a point on the C.G. range and weight graph (Figure 6-15). If the point falls within the C.G. envelope, the loading meets the weight and balance requirements.

|                           | Weight<br>(Lbs) | Arm Aft<br>Datum<br>(Inches) | Moment<br>(In-Lbs) |
|---------------------------|-----------------|------------------------------|--------------------|
| Basic Empty Weight        |                 |                              |                    |
| Pilot and Front Passenger | 340.0           | 80.5                         | 27370              |
| Passengers (Rear Seats)*  | 340.0           | 118.1                        | 40154              |
| Fuel (48 Gallon Maximum)  |                 | 95.0                         |                    |
| Baggage*                  |                 | 142.8                        |                    |
| Total Loaded Airplane     |                 |                              |                    |

The center of gravity (C.G.) of this sample loading problem is at \_\_\_\_\_ inches aft of the datum line. Locate this point ( ) on the C.G. range and weight graph. Since this point falls within the weight - C.G. envelope, this loading meets the weight and balance requirements.

IT IS THE RESPONSIBILITY OF THE PILOT AND AIRCRAFT OWNER TO INSURE THAT THE AIRPLANE IS LOADED PROPERLY.

\*Utility Category Operation - No baggage or rear passengers allowed.

### SAMPLE LOADING PROBLEM (NORMAL CATEGORY)

Figure 6-9

**SECTION 6**  
**WEIGHT AND BALANCE**

**PIPER AIRCRAFT CORPORATION**  
**PA-28-181, CHEROKEE ARCHER II**


|                           | Weight<br>(Lbs) | Arm Aft<br>Datum<br>(Inches) | Moment<br>(In-Lbs) |
|---------------------------|-----------------|------------------------------|--------------------|
| Basic Empty Weight        |                 |                              |                    |
| Pilot and Front Passenger |                 | 80.5                         |                    |
| Passengers (Rear Seats)*  |                 | 118.1                        |                    |
| Fuel (48 Gallon Maximum)  |                 | 95.0                         |                    |
| Baggage*                  |                 | 142.8                        |                    |
| Total Loaded Airplane     |                 |                              |                    |

Totals must be within approved weight and C.G. limits. It is the responsibility of the airplane owner and the pilot to insure that the airplane is loaded properly. The Basic Empty Weight C.G. is noted on the Weight and Balance Data Form (Figure 6-00). If the airplane has been altered, refer to the Weight and Balance Record for this information.

\*Utility Category Operation - No baggage or rear passengers allowed.


**WEIGHT AND BALANCE LOADING FORM**

Figure 6-11

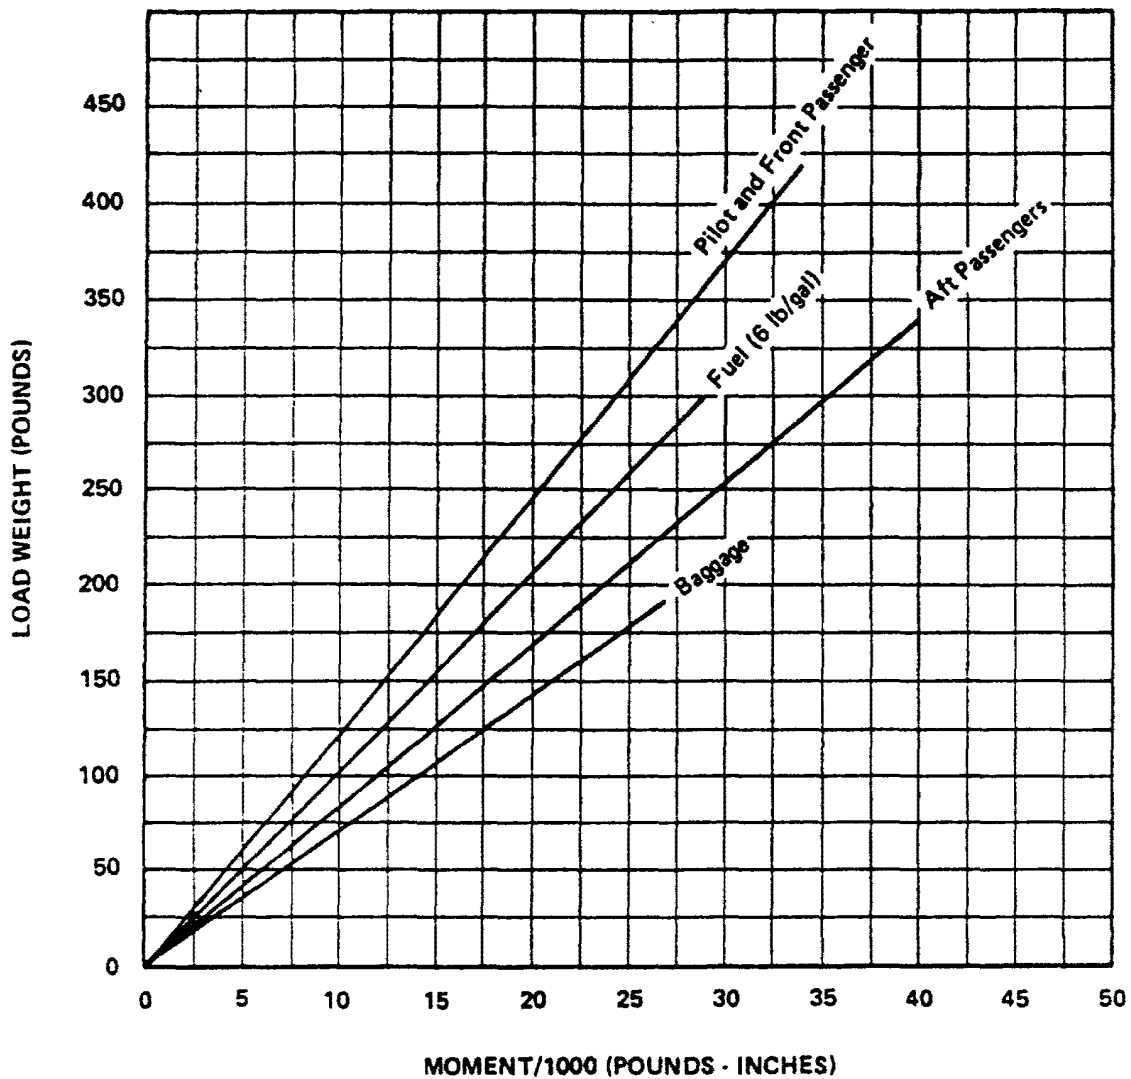

LOADING GRAPH

Figure 6-13

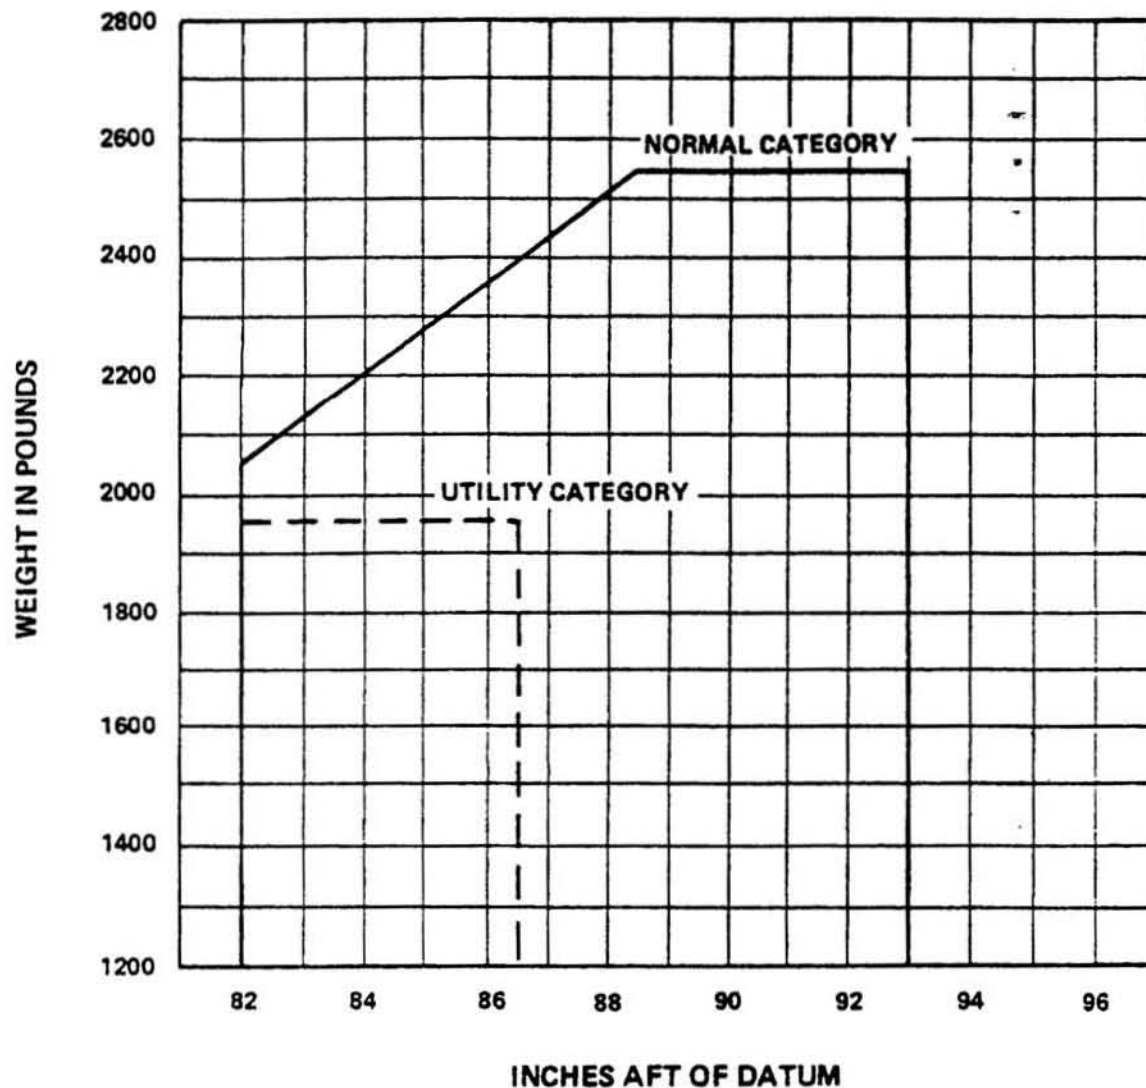

C.G. RANGE AND WEIGHT

Figure 6-15

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

**6.9 EQUIPMENT LIST**

The following is a list of equipment which may be installed in the PA-28-181. It consists of those items used for defining the configuration of an airplane when the basic empty weight is established at the time of delivery. Only those standard items which are alternate standard items and those required to be listed by the certificating authority (FAA) are presented. Items marked with an "X" are those items which were installed on the airplane described below as delivered by the manufacturer.

PIPER AIRCRAFT CORPORATION

PA-28-181 CHEROKEE ARCHER II

SERIAL NO. \_\_\_\_\_ REGISTRATION NO. \_\_\_\_\_ DATE: \_\_\_\_\_

(a) Propeller and Propeller Accessories

| Item<br>No. | Item                                                                                    | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|-----------------------------------------------------------------------------------------|-------------------|--------------------|------------------------|--------------------|
| 1           | Propeller, Sensenich<br>76EM8S5-0-60, Piper<br>Spec. PS50077-8<br>Cert. Basis - TC P4EA |                   |                    |                        |                    |

THIS PAGE INTENTIONALLY LEFT BLANK



(b) Engine and Engine Accessories

| Item No. | Item                                                                           | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|--------------------------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 11       | Engine - Lycoming Model O-360-A4M Piper Dwg. 62941-16<br>Cert. Basis - TC E286 |                |                 |                     |                 |
| 13       | Oil Filter - Lycoming No. 75528 (AC #OF5578770)<br>Cert. Basis - TC E286       | _____          | 3.3             | 35.5                | 117             |
| 15       | Oil Filter - Lycoming #LW-13743 (Champion #CH-48110)<br>Cert. Basis - TC E286  | _____          | 2.8             | 35.5                | 99              |

THIS PAGE INTENTIONALLY LEFT BLANK

(c) Landing Gear and Brakes

| Item No. | Item                                                                                                                                                                                                                                                                  | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 27       | Two Main Wheel Assemblies<br>Piper Dwg. 63370-0 & -1<br>a. Cleveland Aircraft Products<br>Wheel Assembly No. 40-86<br>Brake Assembly No. 30-55<br>Cert. Basis - TSO C26a<br><br>b. Two Main 4-Ply Rating Tires<br>6.00-6 with Regular Tubes<br>Cert. Basis - TSO C26b |                |                 |                     |                 |
| 29       | One Nose Wheel<br>a. Cleveland Aircraft Products<br>Wheel Assembly No. 40-76B<br>(Less Brake Drum)<br>Cert. Basis - TSO C26a<br><br>b. One Nose Wheel 4-Ply Rating<br>Tire 6.00-6 with Regular Tube<br>Cert. Basis - TSO C26b                                         |                |                 |                     |                 |

THIS PAGE INTENTIONALLY LEFT BLANK

(d) Electrical Equipment

| Item<br>No. | Item | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|------|-------------------|--------------------|------------------------|--------------------|
|-------------|------|-------------------|--------------------|------------------------|--------------------|

THIS PAGE INTENTIONALLY LEFT BLANK

(e) Instruments

| Item<br>No. | Item                                                                | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|---------------------------------------------------------------------|-------------------|--------------------|------------------------|--------------------|
| 53          | Airspeed Indicator,<br>Piper Dwg. 63205-2<br>Cert. Basis - TSO C2b  |                   |                    |                        |                    |
| 55          | Altimeter, Piper<br>Spec. PS50008-2 or -3<br>Cert. Basis - TSO C10b |                   |                    |                        |                    |

THIS PAGE INTENTIONALLY LEFT BLANK



(f) Miscellaneous

| Item<br>No. | Item                                                                         | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|------------------------------------------------------------------------------|-------------------|--------------------|------------------------|--------------------|
| 65          | Forward Seat Belts (2)<br>Piper Spec. PS50039-4-2A<br>Cert. Basis - TSO C22f |                   |                    |                        |                    |
| 67          | Rear Seat Belts (2)<br>Piper Spec. PS50039-4-3<br>Cert. Basis - TSO C22f     |                   |                    |                        |                    |

THIS PAGE INTENTIONALLY LEFT BLANK

(g) Engine and Engine Accessories  
(Optional Equipment)

| Item No. | Item                                                                                        | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|---------------------------------------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 79       | Vacuum Filter, Airborne Mfg. Co., #1J7-1 Piper Dwg. 66673<br>Cert. Basis - TC 2A13          | _____          | .3              | 52.0                | 16              |
| 81       | Vacuum Pump, Airborne Mfg. Co., Model 211cc and Drive, PAC 79399-0<br>Cert. Basis - TC 2A13 | _____          | 3.2             | 32.0                | 103             |
| 83       | Low Vacuum Annunciator Light<br>Cert. Basis - TC 2A13                                       | _____          | Neglect         |                     |                 |
| 85       | Vacuum Regulator, Airborne Mfg. Co., #2H3-19<br>Cert. Basis - TC 2A13                       | _____          | .5              | 52.0                | 26              |

THIS PAGE INTENTIONALLY LEFT BLANK

(h) Propeller and Propeller Accessories  
(Optional Equipment)

| Item<br>No. | Item | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|------|-------------------|--------------------|------------------------|--------------------|
|-------------|------|-------------------|--------------------|------------------------|--------------------|

THIS PAGE INTENTIONALLY LEFT BLANK

- (i) Landing Gear and Brakes  
(Optional Equipment)

| Item<br>No. | Item | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|------|-------------------|--------------------|------------------------|--------------------|
|-------------|------|-------------------|--------------------|------------------------|--------------------|

THIS PAGE INTENTIONALLY LEFT BLANK



(j) Electrical Equipment  
(Optional Equipment)

| Item No. | Item                                                                                                   | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|--------------------------------------------------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 111      | Landing Light, G.E.<br>Model 4509<br>Cert. Basis - TC 2A13                                             | _____          | .5              | 13.1                | 7               |
| 113      | Anti-Collision Lights<br>(Wing Tip) (Whelen)<br>Cert. Basis - STC SA615 EA                             | _____          | 5.7             | 157.9               | 900             |
| 114      | Navigation Lights (Wing) (2)<br>Grimes A1285 (Red & Green)<br>Cert. Basis - TC 2A13                    | _____          | 0.4             | 106.6               | 43              |
| 115      | Navigation Light (Rear) (1)<br>Grimes Model 2064 (White)<br>Cert. Basis - TSO C30b                     | _____          | .2              | 281.0               | 56              |
| 116      | Rotating Beacon<br>Cert. Basis - TC 2A13                                                               | _____          | 1.5             | 263.4               | 395             |
| 117      | Battery 12V, 35 A.H.,<br>Rebat R-35 (Weight 27.2 lbs.)<br>Cert. Basis - TC 2A13                        | _____          | *5.3            | 168.0               | 890             |
| 119      | Cabin Light, Piper Dwgs.<br>66632-0 & 95229-0<br>Cert. Basis - TC 2A13                                 | _____          | .3              | 99.0                | 30              |
| 121      | Cabin Speaker SB-15052 or<br>6EU 1937, Quincy Speaker<br>Co., Oakton, Indiana<br>Cert. Basis - TC 2A13 | _____          | .8              | 99.0                | 79              |
| 123      | Auxiliary Power Receptacle,<br>Piper Dwg. 79454<br>Cert. Basis - TC 2A13                               | _____          | 2.7             | 178.5               | 482             |
| 125      | External Power Cable 62355<br>Cert. Basis - TC 2A13                                                    | _____          | 4.6             | 142.8               | 657             |

\*Weight and moment difference between standard and optional equipment.

**SECTION 6**  
**WEIGHT AND BALANCE**

**PIPER AIRCRAFT CORPORATION**  
**PA-28-181, CHEROKEE ARCHER II**

(j) Electrical Equipment  
(Optional Equipment) (cont)

| Item<br>No. | Item                                                             | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|------------------------------------------------------------------|-------------------|--------------------|------------------------|--------------------|
| 127         | Piper Pitch Trim,<br>Piper Dwg. 67496-3<br>Cert. Basis - TC 2A13 | _____             | 4.7                | 145.6                  | 684                |
| 129         | Heated Pitot Head<br>Piper Dwg. 69041-7<br>Cert. Basis - TC 2A13 | _____             | .4                 | 100.0                  | 40                 |
| 131         | Instrument Panel Lights<br>Cert. Basis - TC 2A13                 | _____             | 0.3                | 67.8                   | 20                 |
| 133         | Instrument Light<br>Grimes 15-0083-7<br>Cert. Basis - TC 2A13    | _____             | 0.1                | 99.0                   | 10                 |

(k) Instruments (Optional Equipment)

| Item No. | Item                                                                             | Mark if Instl. | Weight (Pounds)              | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|----------------------------------------------------------------------------------|----------------|------------------------------|---------------------|-----------------|
| 145      | Suction Gauge, Piper<br>Dwg. 99480-0 or -2<br>Cert. Basis - TC 2A13              | _____          | .5                           | 62.2                | 31              |
| 147      | Vertical Speed, Piper<br>Dwg. 99010-2, -4 or -5<br>Cert. Basis - TSO C8b         | _____          | 1.0                          | 60.9                | 61              |
| 149      | Attitude Gyro, Piper<br>Dwg. 99002-2, -3, -4 or -5<br>Cert. Basis - TSO C4c      | _____          | 2.2                          | 59.4                | 131             |
| 151      | Directional Gyro, Piper<br>Dwg. 99003-2, -3, -4 or -5<br>Cert. Basis - TSO C5c   | _____          | 2.6                          | 59.7                | 155             |
| 153      | Air Temperature Gauge,<br>Piper Dwg. 79316<br>Cert. Basis - TC 2A13              | _____          | .2                           | 72.6                | 15              |
| 155      | Clock<br>Cert. Basis - TC 2A13                                                   | _____          | .4                           | 62.4                | 25              |
| 157      | Tru-Speed Indicator,<br>Piper Dwg. 62143-2 or -13<br>Cert. Basis - TSO C2b       | _____          | (same as Standard Equipment) |                     |                 |
| 159      | Turn and Slip Indicator,<br>Piper Spec. PS50030-2 or -3<br>Cert. Basis - TSO C3b | _____          | 2.6                          | 59.7                | 155             |
| 161      | Manifold Pressure Gauge,<br>Piper Spec. PS50031-3 or -4<br>Cert. Basis - TSO C45 | _____          | .9                           | 60.8                | 55              |
| 163      | Exhaust Gas Temperature,<br>Piper Dwg. 99026<br>Cert. Basis - TC 2A13            | _____          | .7                           | 55.4                | 39              |

**SECTION 6**  
**WEIGHT AND BALANCE**

**PIPER AIRCRAFT CORPORATION**  
**PA-28-181, CHEROKEE ARCHER II**

(k) Instruments  
(Optional Equipment) (cont)

| Item<br>No. | Item                                                                            | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|---------------------------------------------------------------------------------|-------------------|--------------------|------------------------|--------------------|
| 165         | Encoding Altimeter<br>Piper Spec. PS50008-6 or -7<br>Cert. Basis - TSO C10b C88 | _____             | * .9               | 60.3                   | 54                 |
| 167         | Engine Hour Meter<br>Piper Dwg. 79548-0<br>Cert. Basis - TC 2A13                | _____             | .3                 | 61.2                   | 18                 |

\*Weight and moment difference between standard and optional equipment.

(I) Autopilots  
(Optional Equipment)

| Item No. | Item                                                 | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 177      | AutoFlite II<br>Cert. Basis - STC SA3066SW-D         | _____          | 5.6             | 91.8                | 514             |
| 179      | AutoControl IIIB<br>Cert. Basis - STC SA3065SW-D     | _____          | 9.6             | 77.6                | 745             |
| 181      | Omni Coupler, #1C388<br>Cert. Basis - STC SA3065SW-D | _____          | 1.0             | 59.3                | 59              |

THIS PAGE INTENTIONALLY LEFT BLANK

(m) Radio Equipment  
(Optional Equipment)

| Item No. | Item                                                                                                                                                                                | Mark if Instl.                       | Weight (Pounds)              | Arm (In.) Aft Datum                | Moment (Lb.-In.)             |
|----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|------------------------------|------------------------------------|------------------------------|
| 191      | King KX 170 ( ) (VHF Comm/Nav)<br>Transceiver, Single<br>Transceiver, Dual<br>Cert. Basis - TC 2A13                                                                                 | <br>_____<br>_____                   | <br>7.5<br>15.0              | <br>56.6<br>56.6                   | <br>425<br>849               |
| 193      | King KX 175 ( ) (VHF Transceiver<br>King KN-73 Glide Slope Receiver,<br>King KN-77 VOR/LOC Converter,<br>King KNI 520 VOR/ILS Indicator<br>Cert. Basis - TSO C36c, C37b, C38b, C40a | <br>_____<br>_____<br>_____<br>_____ | <br>9.4<br>3.2<br>3.6<br>2.8 | <br>56.6<br>184.3<br>183.6<br>60.5 | <br>532<br>590<br>661<br>169 |
| 195      | King KX 175 ( ) VHF Transceiver (2nd)<br>King KN-77 VOR/LOC Converter,<br>King KNI-520 VOR/ILS Indicator<br>Cert. Basis - TSO C36c, C37b, C38b, C40a                                | <br>_____<br>_____<br>_____          | <br>8.6<br>4.2<br>2.8        | <br>56.6<br>183.6<br>60.5          | <br>487<br>771<br>169        |
| 197      | King KI-201 ( ) VOR/LOC Ind.<br>Cert. Basis - TC 2A13<br>a. Single<br>b. Dual                                                                                                       | <br>_____<br>_____                   | <br>2.5<br>5.0               | <br>59.6<br>59.9                   | <br>149<br>300               |
| 199      | King KI-213 VOR/LOC/GS Indicator<br>Cert. Basis - TC 2A13                                                                                                                           | <br>_____                            | <br>2.5                      | <br>60.4                           | <br>151                      |
| 201      | King KI-214 ( ) VOR/LOC/GS Ind.<br>Cert. Basis - TC 2A13                                                                                                                            | <br>_____                            | <br>3.3                      | <br>59.9                           | <br>198                      |

**SECTION 6**  
**WEIGHT AND BALANCE**

**PIPER AIRCRAFT CORPORATION**  
**PA-28-181, CHEROKEE ARCHER II**

(m) Radio Equipment  
(Optional Equipment) (cont)

| Item No. | Item                                                           | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|----------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 203      | Narco Comm 10A VHF Transceiver<br>Cert. Basis - TC 2A13        | _____          | 3.9             | 57.4                | 224             |
| 205      | Narco Nav 10 VHF Receiver<br>Cert. Basis - TC 2A13             | _____          | 1.9             | 58.6                | 111             |
| 207      | Narco Nav 11 VHF Receiver<br>Cert. Basis - TC 2A13             |                |                 |                     |                 |
|          | a. Single                                                      | _____          | 2.8             | 58.6                | 164             |
|          | b. Dual                                                        | _____          | 5.6             | 58.6                | 328             |
| 209      | Narco Comm 11A VHF Transceiver<br>Cert. Basis - TC 2A13        |                |                 |                     |                 |
|          | a. Single                                                      | _____          | 3.6             | 57.4                | 207             |
|          | b. Dual                                                        | _____          | 7.1             | 57.4                | 408             |
| 211      | Narco Comm 11B VHF Transceiver<br>Cert. Basis - TC 2A13        |                |                 |                     |                 |
|          | a. Single                                                      | _____          | 3.9             | 57.4                | 224             |
|          | b. Dual                                                        | _____          | 7.8             | 57.4                | 448             |
| 213      | Narco Nav 12 VHF Receiver<br>Cert. Basis - TC 2A13             | _____          | 3.4             | 58.6                | 199             |
| 215      | Narco Nav 14 VHF Receiver<br>Cert. Basis - TC 2A13             | _____          | 2.5             | 57.4                | 144             |
| 217      | Narco Comm 111 VHF Transceiver<br>Cert. Basis - TSO C37b, C38b |                |                 |                     |                 |
|          | a. Single                                                      | _____          | 3.0             | 57.4                | 172             |
|          | b. Dual                                                        | _____          | 6.0             | 57.4                | 344             |
| 219      | Narco Nav 111<br>Cert. Basis - TSO C36c, C40a, C66a            | _____          | 2.5             | 58.6                | 147             |



(m) Radio Equipment  
(Optional Equipment) (cont)

| Item No. | Item                                                                         | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb.-In.) |
|----------|------------------------------------------------------------------------------|----------------|-----------------|---------------------|------------------|
| 221      | Narco Comm 111B VHF Transceiver<br>Cert. Basis - TSO C37b, C38b              |                |                 |                     |                  |
|          | a. Single                                                                    | _____          | 3.9             | 57.4                | 224              |
|          | b. Dual                                                                      | _____          | 7.8             | 57.4                | 448              |
| 223      | Narco Nav 112 Receiver<br>Cert. Basis - TSO C36c, C40a, C66c, C34c           | _____          | 3.3             | 58.6                | 193              |
| 225      | Narco Nav 114 VHF Receiver<br>Cert. Basis - TSO C38b, C40a, C36c, C34c, C66a | _____          | 2.5             | 57.4                | 144              |
| 227      | Narco UGR-2A Glide Slope Receiver                                            | _____          | 2.4             | 173.8               | 417              |
|          | Cable                                                                        | _____          | 1.8             | 128.0               | 230              |
|          | Antenna                                                                      | _____          | .4              | 87.4                | 35               |
|          | Cable, Antenna                                                               | _____          | .5              | 145.0               | 73               |
|          | Cert. Basis - TC 2A13                                                        |                |                 |                     |                  |
| 229      | Narco UGR-3 Glide Slope Receiver                                             | _____          | 2.4             | 173.8               | 417              |
|          | Cable                                                                        | _____          | 1.8             | 128.0               | 230              |
|          | Antenna                                                                      | _____          | 0.4             | 87.4                | 35               |
|          | Cable, Antenna                                                               | _____          | 0.5             | 145.0               | 73               |
|          | Cert. Basis - TC 2A13                                                        |                |                 |                     |                  |
| 231      | Narco MBT-12-R Marker Beacon<br>Cert. Basis - TC 2A13                        | _____          | 3.1             | 69.1                | 214              |

**SECTION 6**  
**WEIGHT AND BALANCE**

**PIPER AIRCRAFT CORPORATION**  
**PA-28-181, CHEROKEE ARCHER II**

(m) Radio Equipment  
(Optional Equipment) (cont)

| Item No. | Item                                      | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|-------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 233      | King KN-74 R-Nav<br>Cert. Basis - TC 2A13 | _____          | 4.7             | 56.6                | 266             |
| 235      | King KN-60C DME<br>Cert. Basis - TC 2A13  | _____          | 7.3             | 59.0                | 431             |
| 236      | King KN-61 DME<br>Cert. Basis - TC 2A13   | _____          | 12.5            | 179.0               | 2237            |
| 237      | King KN-65 DME<br>Cert. Basis - TSO C66a  | _____          | 9.1             | 182.6               | 1662            |
| 238      | King KN-65A DME<br>Cert. Basis - TSO C66a | _____          | 13.0            | 174.9               | 2274            |
| 239      | Narco DME-190<br>Cert. Basis - TC 2A13    | _____          | 5.9             | 65.9                | 389             |
| 241      | King KR-85 ADF<br>Cert. Basis - TSO C41b  | _____          | 8.6             | 85.2                | 733             |
|          | a. Audio Amplifier                        | _____          | .8              | 51.0                | 41              |
| 243      | King KR-86 ADF<br>Cert. Basis - TC A3SO   |                |                 |                     |                 |
|          | a. First                                  | _____          | 6.7             | 91.6                | 614             |
|          | b. Second                                 | _____          | 9.7             | 107.0               | 1038            |
|          | c. Audio Amplifier                        | _____          | .8              | 51.0                | 41              |
| 245      | Narco ADF-140<br>Cert. Basis - TSO C41c   |                |                 |                     |                 |
|          | a. Single                                 | _____          | 6.0             | 91.2                | 547             |
|          | b. Dual                                   | _____          | 18.3            | 108.4               | 1984            |

(m) Radio Equipment  
(Optional Equipment) (cont)

| Item No. | Item                                                           | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|----------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 247      | King KMA-20 ( ) Audio Panel<br>Cert. Basis - TSO C35c, C50b    | _____          | 3.7             | 70.8                | 262             |
| 249      | Narco CP-125 Audio Selector<br>Panel<br>Cert. Basis - TC 2A13  | _____          | 2.2             | 55.0                | 121             |
| 251      | King KT76/78 Transponder<br>Cert. Basis - TSO C74b             | _____          | 3.1             | 58.1                | 180             |
| 253      | Narco AT-50A Transponder<br>Cert. Basis - TSO C74b             | _____          | 3.0             | 57.3                | 172             |
| 255      | Nav Receiving Antenna<br>Cert. Basis - TC 2A13                 |                |                 |                     |                 |
|          | a. Antenna                                                     | _____          | 0.5             | 265.0               | 133             |
|          | b. Cable                                                       | _____          | 0.9             | 157.0               | 141             |
| 257      | Comm Antennas<br>Cert. Basis - TC 2A13                         |                |                 |                     |                 |
|          | a. #1 Antenna                                                  | _____          | 0.3             | 157.8               | 47              |
|          | b. #1 Cable                                                    | _____          | 0.4             | 103.4               | 41              |
|          | c. #2 Antenna                                                  | _____          | 0.3             | 192.8               | 58              |
|          | d. #2 Cable                                                    | _____          | 0.5             | 120.9               | 60              |
| 259      | Single ADF Sense<br>Antenna and Cable<br>Cert. Basis - TC A3SO | _____          | 0.4             | 150.0               | 60              |

**SECTION 6**  
**WEIGHT AND BALANCE**

**PIPER AIRCRAFT CORPORATION**  
**PA-28-181, CHEROKEE ARCHER II**

(m) Radio Equipment  
(Optional Equipment) (cont)

| Item No. | Item                                                                  | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|-----------------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 261      | Anti-Static Kit<br>Cert. Basis - TC 2A13                              |                |                 |                     |                 |
|          | a. #1 Comm Antenna<br>and Cable                                       | _____          | 1.4             | 144.3               | 202             |
|          | b. #2 Comm Antenna<br>and Cable                                       | _____          | 1.5             | 170.7               | 256             |
|          | c. Low Frequency Antenna                                              | _____          | 0.5             | 147.5               | 74              |
|          | d. Static Wicks                                                       | _____          | -               | -                   | -               |
| 263      | Piper Automatic Locator,<br>Piper Dwg. 99890<br>Cert. Basis - TC 2A13 |                |                 |                     |                 |
|          | a. Transmitter, Piper<br>Dwg. 79265-0                                 | _____          | 1.7             | 236.2               | 402             |
|          | b. Transmitter, Piper<br>Dwg. 79265-6                                 | _____          | 1.3             | 236.2               | 307             |
|          | c. Transmitter, Piper<br>Dwg. 79761-4                                 | _____          | 1.7             | 236.2               | 402             |
|          | d. Antenna and Coax                                                   | _____          | 0.2             | 224.4               | 45              |
| 265      | Microphone<br>Cert. Basis - TC 2A13                                   |                |                 |                     |                 |
|          | a. (Carbon)<br>Piper Dwg. 68856-10                                    | _____          | 0.3             | 64.9                | 19              |
|          | b. (Dynamic)<br>Piper Dwg. 68856-11                                   | _____          | 0.6             | 69.9                | 42              |
|          | c. (Dynamic)<br>Piper Dwg. 68856-12                                   | _____          | 0.3             | 64.9                | 19              |
| 267      | Headset<br>Piper Dwg. 68856-10<br>Cert. Basis - TC 2A13               | _____          | 0.5             | 60.0                | 30              |

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

(n) Miscellaneous  
(Optional Equipment)

| Item No. | Item                                                                                                  | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|-------------------------------------------------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 281      | Fire Extinguisher,<br>Scott Aviation #42211-00,<br>Piper Dwg. 76167-2<br>Cert. Basis - TC 2A13        | _____          | 4.6             | 71.0                | 327             |
| 283      | Assist Step,<br>Piper Dwg. 65384-0<br>Cert. Basis - TC 2A13                                           | _____          | 1.8             | 156.0               | 281             |
| 285      | Inertia Safety Belts<br>(Rear) (2) 0.8 lbs. each<br>Piper Spec. PS50039-4-14<br>Cert. Basis - TC 2A13 | _____          | 1.6             | 140.3               | 224             |
| 287      | Nose Wheel Fairing<br>Piper Dwg. 65348-2<br>Cert. Basis - TC 2A13                                     | _____          | 3.6             | 36.3                | 131             |
| 289      | Main Wheel Fairings<br>Piper Dwg. 65237<br>Cert. Basis - TC 2A13                                      | _____          | 7.6             | 113.6               | 863             |
| 291      | Vert. Adj. Front Seats (Left)<br>Piper Dwg. 79591-0<br>Cert. Basis - TC 2A13                          | _____          | * 6.6           | 80.7                | 533             |
| 293      | Vert. Adj. Front Seat (Right)<br>Piper Dwg. 79591-1<br>Cert. Basis - TC 2A13                          | _____          | * 6.8           | 80.0                | 544             |
| 295      | Super Cabin Sound Proofing,<br>Piper Dwg. 79601-3<br>Cert. Basis - TC 2A13                            | _____          | 18.1            | 86.8                | 1571            |
| 297      | Lighter, 12V Universal<br>#200462<br>Cert. Basis - TC 2A13                                            | _____          | .2              | 62.9                | 13              |

\*Weight and moment difference between standard and optional equipment.

**SECTION 6**  
**WEIGHT AND BALANCE**

**PIPER AIRCRAFT CORPORATION**  
**PA-28-181, CHEROKEE ARCHER II**

(n) Miscellaneous  
(Optional Equipment) (cont)

| Item No. | Item                                                                                                   | Mark if Instl. | Weight (Pounds) | Arm (In.) Aft Datum | Moment (Lb-In.) |
|----------|--------------------------------------------------------------------------------------------------------|----------------|-----------------|---------------------|-----------------|
| 299      | Assist Strap,<br>Piper Dwg. 79455<br>Cert. Basis - TC 2A13                                             | _____          | .2              | 109.5               | 22              |
| 301      | Overhead Vent System<br>Piper Dwg. 76304-9<br>Cert. Basis - TC 2A13                                    | _____          | 6.4             | 159.6               | 1022            |
| 303      | Overhead Vent System with<br>Ground Ventilating Blower<br>Piper Dwg. 76304-10<br>Cert. Basis - TC 2A13 | _____          | 14.0            | 170.7               | 2390            |
| 305      | Alternate Static Source<br>Piper Dwg. 35493-2<br>Cert. Basis - TC 2A13                                 | _____          | .4              | 61.0                | 24              |

Calibrated Alternate Static Source

Placard Required: Yes \_\_\_\_\_ No \_\_\_\_\_

|     |                                                                              |       |      |       |      |
|-----|------------------------------------------------------------------------------|-------|------|-------|------|
| 307 | Headrest (2) (Front)<br>Piper Dwg. 79337-18<br>Cert. Basis - TC 2A13         | _____ | 2.2  | 94.5  | 208  |
| 309 | Headrest (2) (Rear)<br>Piper Dwg. 79337-18<br>Cert. Basis - TC 2A13          | _____ | 2.2  | 132.1 | 291  |
| 311 | Air Conditioning Installation<br>Piper Dwg. 99575-3<br>Cert. Basis - TC 2A13 | _____ | 67.4 | 102.8 | 6929 |



(n) Miscellaneous  
(Optional Equipment) (cont)

| Item<br>No. | Item                                                                           | Mark if<br>Instl. | Weight<br>(Pounds) | Arm (In.)<br>Aft Datum | Moment<br>(Lb-In.) |
|-------------|--------------------------------------------------------------------------------|-------------------|--------------------|------------------------|--------------------|
| 313         | Zinc Chromate Finish<br>Piper Dwg. 79700-2<br>Cert. Basis - TC 2A13            | _____             | 5.0                | 158.0                  | 790                |
| 315         | Stainless Steel Control<br>Cables, Piper Dwg. 79700-0<br>Cert. Basis - TC 2A13 | _____             | -                  | -                      | -                  |

TOTAL OPTIONAL EQUIPMENT

\_\_\_\_\_

EXTERIOR FINISH

Base Color \_\_\_\_\_

Registration No. Color \_\_\_\_\_

Trim Color \_\_\_\_\_

Type Finish \_\_\_\_\_

Accent Color \_\_\_\_\_

ISSUED: AUGUST 15, 1975

REPORT: VB-760  
6-51

THIS PAGE INTENTIONALLY LEFT BLANK

**TABLE OF CONTENTS**

**SECTION 7**

**DESCRIPTION AND OPERATION**

**OF THE AIRPLANE AND ITS SYSTEMS**

| Paragraph<br>No. |                                      | Page<br>No. |
|------------------|--------------------------------------|-------------|
| 7.1              | The Airplane .....                   | 7-1         |
| 7.3              | Airframe .....                       | 7-1         |
| 7.5              | Engine and Propeller .....           | 7-1         |
| 7.7              | Landing Gear .....                   | 7-3         |
| 7.9              | Flight Controls .....                | 7-5         |
| 7.11             | Engine Controls .....                | 7-6         |
| 7.13             | Fuel System .....                    | 7-8         |
| 7.15             | Electrical System .....              | 7-10        |
| 7.17             | Vacuum System .....                  | 7-15        |
| 7.19             | Instrument Panel .....               | 7-16        |
| 7.21             | Pitot-Static System .....            | 7-18        |
| 7.23             | Heating and Ventilating System ..... | 7-21        |
| 7.25             | Cabin Features .....                 | 7-21        |
| 7.27             | Baggage Area .....                   | 7-22        |
| 7.29             | Stall Warning .....                  | 7-22        |
| 7.31             | Finish .....                         | 7-22        |
| 7.33             | Air Conditioning .....               | 7-23        |
| 7.35             | Piper External Power .....           | 7-24        |
| 7.37             | Emergency Locator Transmitter .....  | 7-24        |

**SECTION 7  
DESCRIPTION AND OPERATION  
OF THE AIRPLANE AND ITS SYSTEMS**

**7.1 THE AIRPLANE**

The PA-28-181 Cherokee is a single-engine, low-wing monoplane of all metal construction. Its full four-place seating, two hundred pound baggage capacity, and economical operation, coupled with the lively performance of a 180 horsepower engine, make this Cherokee a versatile airplane in the business and personal aviation fields.

**7.3 AIRFRAME**

The basic airframe, except for a tubular steel engine mount, steel landing gear struts, and other miscellaneous steel parts, is of aluminum alloy construction. The extremities - the wing tips, the cowling, the tail surfaces - are of tough fiberglass or ABS thermoplastic. Aerobatics are prohibited in this airplane since the structure is not designed for aerobatic loads.

The semi-tapered wings are attached to each side of the fuselage by insertion of the butt ends of the respective main spars into a spar box carry-through which is an integral part of the fuselage structure, providing, in effect, a continuous main spar with splices at each side of the fuselage. There are also fore and aft attachments at the rear spar and at an auxiliary front spar.


The wing airfoil section is a laminar flow type, NACA65<sub>2</sub>-415 with the maximum thickness about 40% aft of the leading edge. This permits the main spar carry-through structure to be located under the rear seat, providing unobstructed cabin floor space ahead of the rear seat.

**7.5 ENGINE AND PROPELLER**

The Cherokee 181 is powered by a Lycoming O-360-A4M four cylinder, direct drive, horizontally opposed engine rated at 180 horsepower at 2700 rpm. It is furnished with a starter, a 60 ampere, 14 volt alternator, a shielded ignition, vacuum pump drive, a fuel pump, and a dry, automotive type carburetor air filter.

The exhaust system is of the cross-over type to reduce back pressure and improve performance. It is made entirely from stainless steel and is equipped with dual mufflers. A heater shroud around the mufflers is provided to supply heat for the cabin and windshield defrosting.

The Sensenich 76EM8S5-0-60 fixed-pitch propeller is made from a one-piece alloy forging.

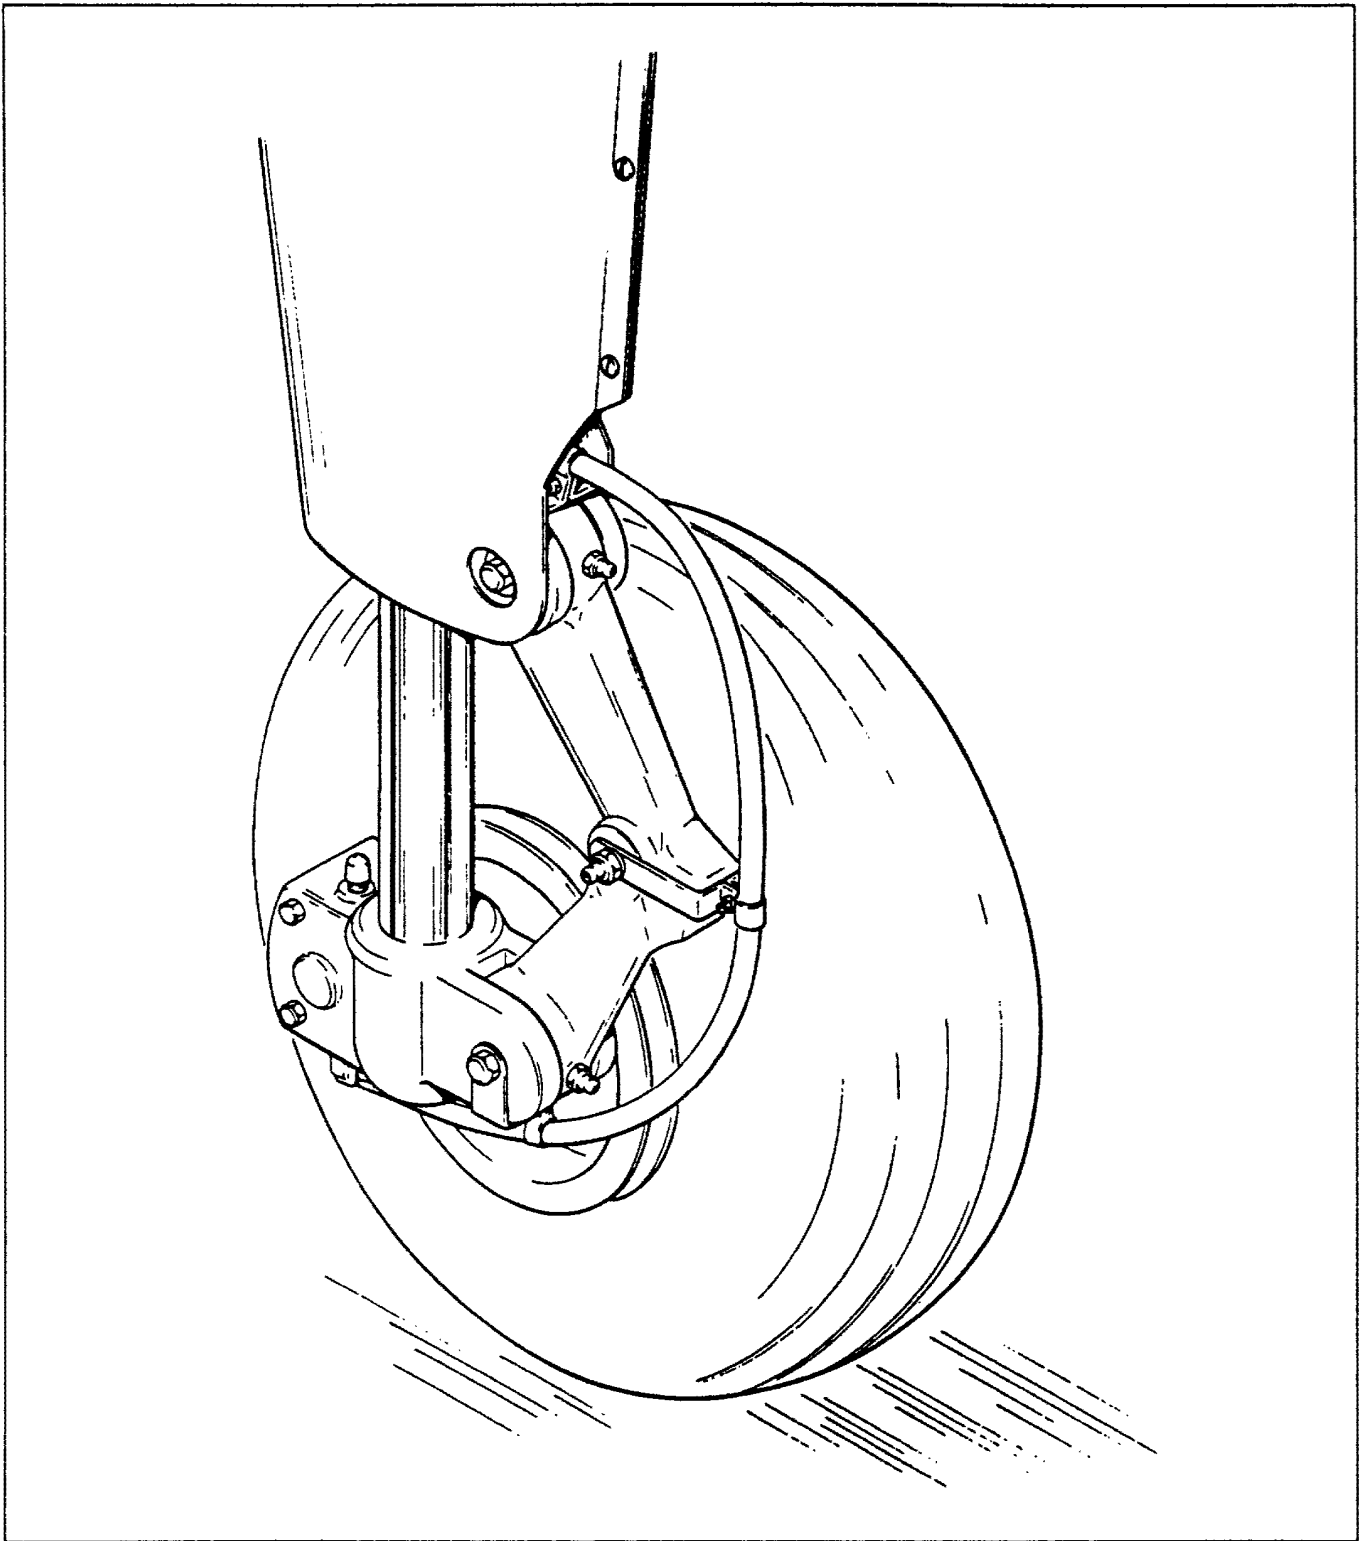

MAIN WHEEL ASSEMBLY

Figure 7-1

## 7.7 LANDING GEAR


The three landing gears use Cleveland 6.00 x 6 wheels, the main gear wheels (Figure 7-1) being provided with brake drums and Cleveland single disc hydraulic brake assemblies. All three wheels use 6.00 x 6, four-ply rating, Type III tires with tubes.

The nose gear is steerable through a 30 degree arc either side of center by use of the rudder pedals and brakes. A spring device incorporated in the rudder pedal torque tube assembly aids in rudder centering and provides rudder trim. The nose gear steering mechanism also incorporates a bungee assembly to reduce steering effort and to dampen shocks and bumps during taxiing. A shimmy dampener is included in the nose gear.

The three struts are of the air-oil type, with a normal extension of 3.25 inches for the nose gear and 4.50 inches for the main gear.

The standard brake system for this Cherokee consists of dual toe brakes attached to the rudder pedals and a hand lever and master cylinder located below and behind the left center of the instrument sub-panel. The toe brakes and the hand brake have their own brake cylinders, but they share a common reservoir. The brake fluid reservoir is installed on the top left front face of the fire wall. The parking brake is incorporated in the master cylinder and is actuated by pulling back on the brake lever, depressing the knob attached to the left side of the handle, and releasing the brake lever. To release the parking brake, pull back on the brake lever to disengage the catch mechanism and allow the handle to swing forward (refer to Figure 7-5).

THIS PAGE INTENTIONALLY LEFT BLANK

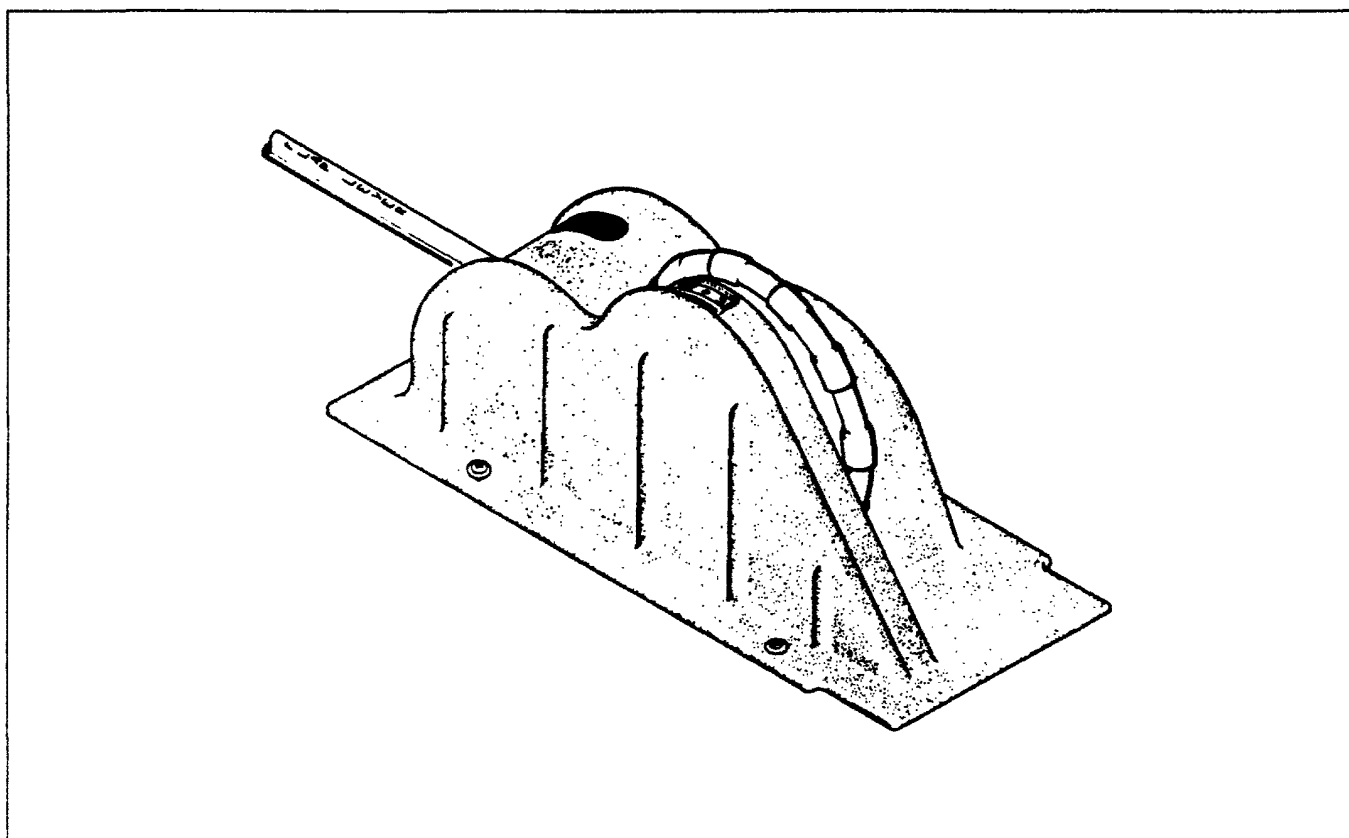

FLIGHT CONTROL CONSOLE

Figure 7-3

## 7.9 FLIGHT CONTROLS

Dual controls are provided as standard equipment, with a cable system used between the controls and the surfaces. The horizontal tail (stabilator) is of the all-movable slab type with a trim tab mounted on the trailing edge of the stabilator to reduce the control system forces. This tab is actuated by a control wheel on the floor between the front seats (Figure 7-3).

The stabilator provides extra stability and controllability with less size, drag and weight than conventional tail surfaces. The ailerons are provided with a differential action which tends to reduce adverse yaw in turning maneuvers, and which also reduces the amount of coordination required in normal turns. A rudder trim adjustment is mounted on the right side of the pedestal below the throttle quadrant and permits directional trim as needed in flight (refer to Figure 7-5).

The flaps are manually operated, balanced for light operating forces and spring-loaded to return to the up position. A past-center lock incorporated in the actuating linkage holds the flap when it is in the up position so that it may be used as a step on the right side. The flap will not support a step load except when in the full up position, so it must be completely retracted when used as a step. The flaps have three extended positions, 10, 25 and 40 degrees.




## **7.11 ENGINE CONTROLS**

Engine controls consist of a throttle control and a mixture control lever. These controls are located on the control quadrant on the lower center of the instrument panel (Figure 7-5) where they are accessible to both the pilot and the copilot. The controls utilize teflon-lined control cables to reduce friction and binding.

The throttle lever is used to adjust engine RPM. The mixture control lever is used to adjust the air to fuel ratio. The engine is shut down by the placing of the mixture control lever in the full lean position. In addition, the mixture control has a lock to prevent inadvertent activation of the mixture control. For information on the leaning procedure, see the Avco-Lycoming Operator's Manual.


The friction adjustment lever on the right side of the control quadrant may be adjusted to increase or decrease the friction holding the throttle and mixture controls or to lock the controls in a selected position.

The carburetor heat control lever is located to the right of the control quadrant on the instrument panel. The control is placarded with two positions: "ON" (down), "OFF" (up).

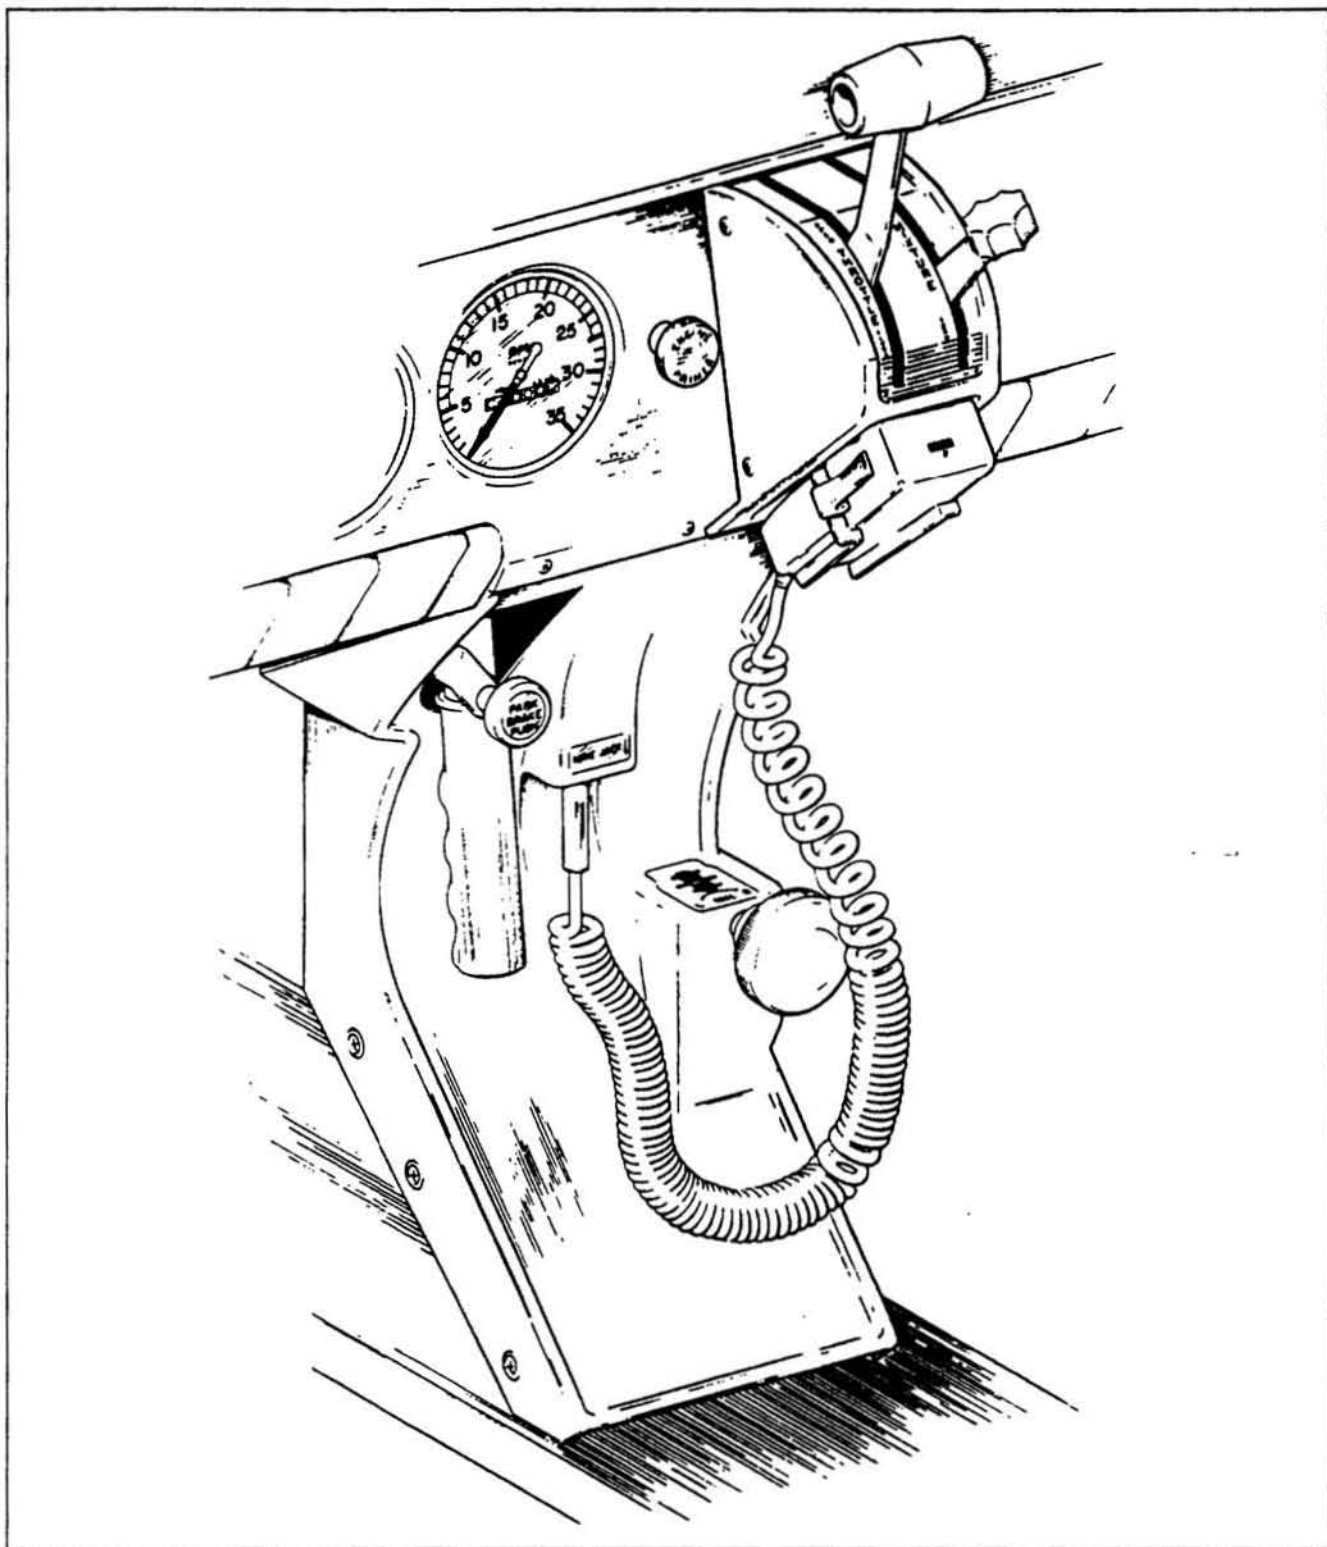

CONTROL QUADRANT AND CONSOLE

Figure 7-5

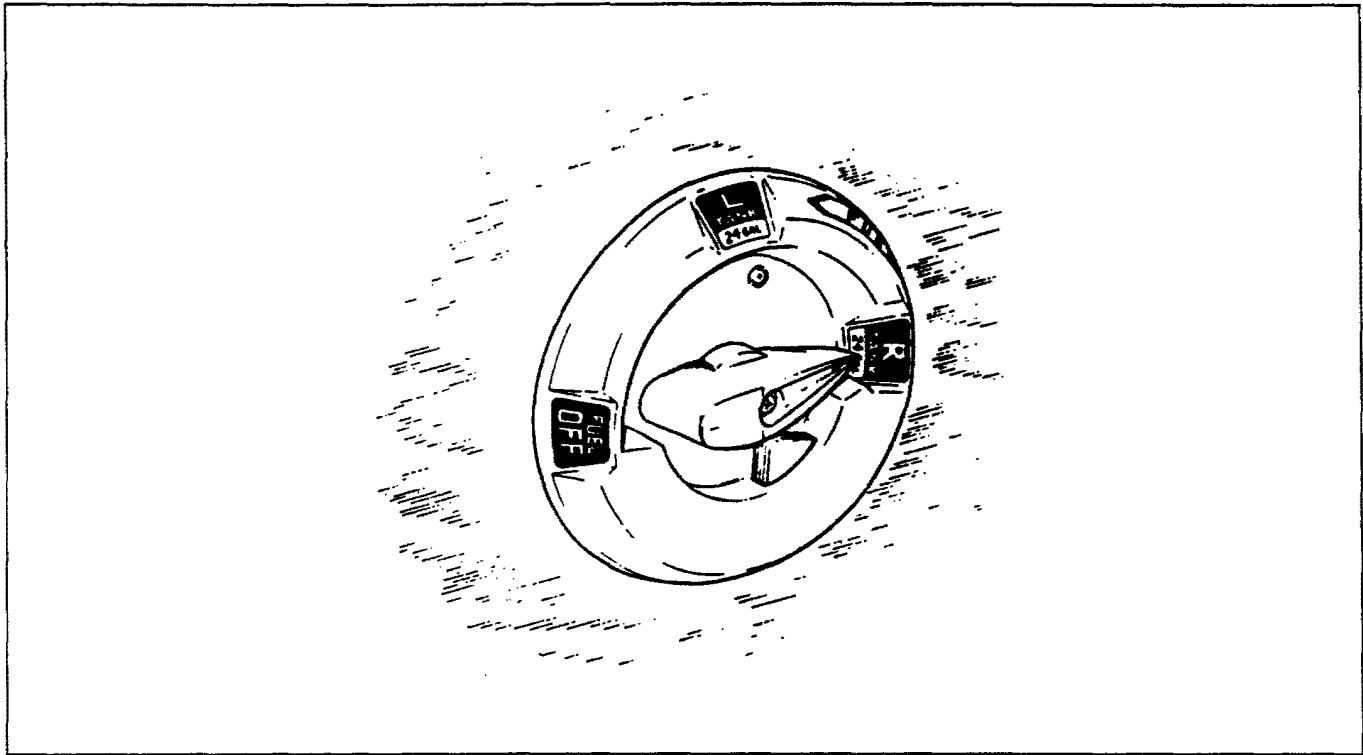

**FUEL SELECTOR**

Figure 7-7


### **7.13 FUEL SYSTEM**

Fuel is stored in two twenty-five gallon (24 gallons usable) tanks which are secured to the leading edge structure of each wing by screws and nut plates. This allows easy removal for service or inspection.

The fuel selector control (Figure 7-7) is located on the left side-panel, forward of the pilot's seat. The button on the selector cover must be depressed and held while the handle is moved to the OFF position. The button releases automatically when the handle is moved back into the ON position.

An auxiliary electric fuel pump is provided in case of failure of the engine driven pump. The electric pump should be on for all takeoffs and landings, and when switching tanks. The pump switch is located in the switch panel above the throttle quadrant.

Each tank has an individual quick drain located at the bottom, inboard rear corner, and should be drained to check for water before each flight (a special container is furnished for this operation). The fuel strainer, which is also equipped with a quick drain, is located on the front lower left corner of the fire wall. This strainer should be drained regularly to check for water or sediment accumulation. To drain the lines from the tanks, the tank selector valve must be switched to each tank in turn, with the electric pump on, and the gascolator drain valve opened (refer to paragraph 8.21 for the complete fuel system draining procedure).

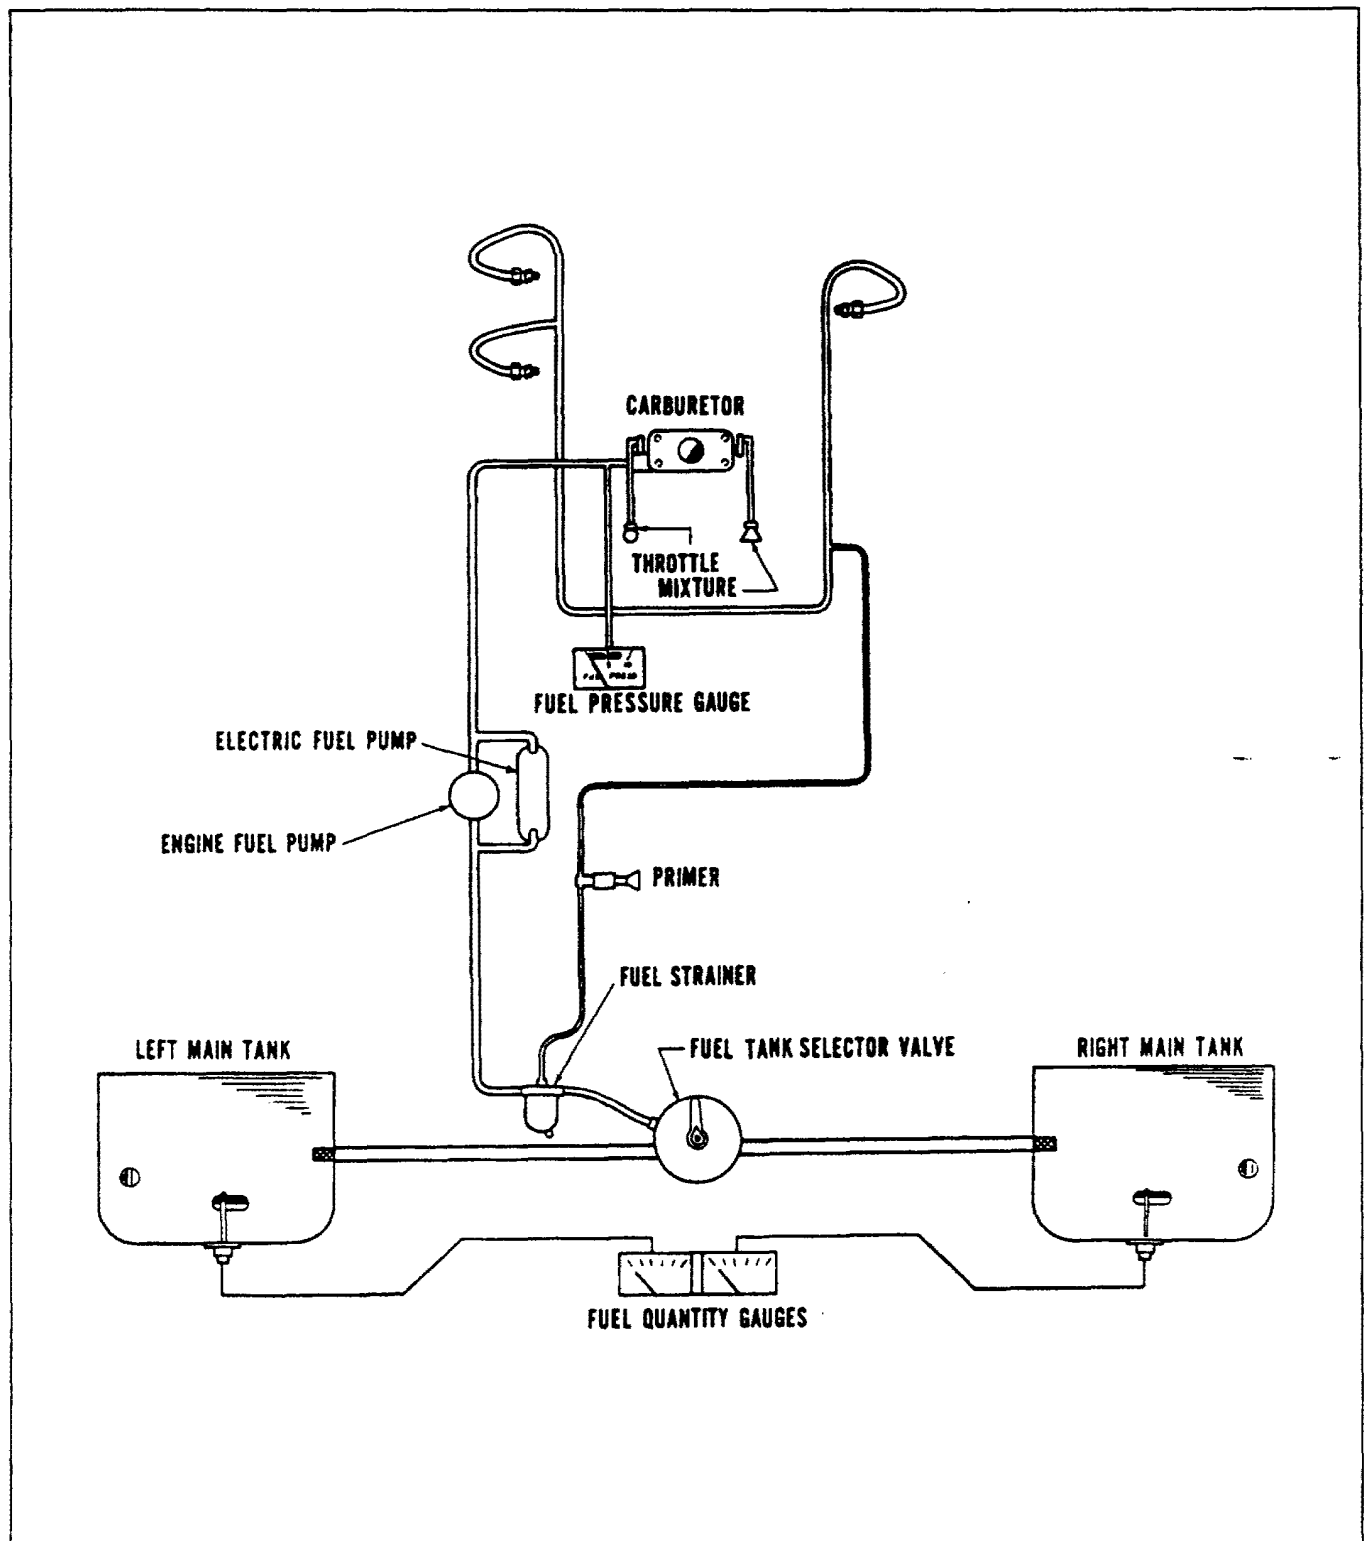

FUEL SYSTEM SCHEMATIC

Figure 7-9

Fuel quantity and pressure are indicated on gauges located in a cluster on the left side of the instrument panel.

An optional engine priming system is available to facilitate starting. The primer pump is located to the immediate left of the throttle quadrant (refer to Figure 7-5).

## **7.15 ELECTRICAL SYSTEM**

The electrical system includes a 14-volt, 60 amp alternator, a 12-volt battery, a voltage regulator, an overvoltage relay and a master switch relay (Figure 7-11). The battery is mounted in a stainless steel box immediately aft of the baggage compartment. The regulator and overvoltage relay are located on the forward left side of the fuselage behind the instrument panel.

Electrical switches are located on the right center instrument panel, and the circuit breakers are located on lower right instrument panel. A rheostat switch on the left side of the switch panel controls the navigation lights and the radio lights. The similar switch on the right side controls and dims the panel lights.

The alternator system offers many advantages over the generator system both in operation and maintenance. The main advantage is full electrical power output at lower engine RPM. This is a great improvement for radio and electrical equipment operation. Since the alternator output is available at all times, the battery will be charging for a greater percentage of use. This will make cold weather starting easier.

Standard electrical accessories include a starter, electric fuel pump, stall warning indicator, cigar lighter, fuel gauge, ammeter, and annunciator panel.

The annunciator panel includes alternator and low oil pressure indicator lights. When the optional gyro system is installed, the annunciator panel also includes a low vacuum indicator light. The annunciator panel lights are provided only as a warning to the pilot that a system may not be operating properly, and that he should check and monitor the applicable system gauge to determine when or if any necessary action is required.

Optional electrical accessories include navigation lights, anti-collision light, landing light, instrument lighting, and cabin dome light. Circuits will handle a full complement of communications and navigational equipment.

### **WARNING**


Strobe lights should not be operating when flying through overcast and clouds since reflected light can produce spacial disorientation. Do not operate strobe lights in close proximity to ground, during takeoff and landing.

The words "master switch" used hereafter in this manual indicate both sides of the switch; battery side "BAT" and alternator side "ALT" are to be depressed simultaneously to OFF or ON as directed.

Unlike previous generator systems, the ammeter does not indicate battery discharge; rather it displays in amperes the load placed on the alternator. With all electrical equipment off (except master switch) the ammeter will be indicating the amount of charging current demanded by the battery. As each item of electrical equipment is turned on, the current will increase to a total appearing on the ammeter. This total includes the battery. The average load for night flight, with radios on, is about 30 amperes. This 30 ampere value, plus approximately two amperes for a fully charged battery, will appear continuously under these flight conditions. The amount of current shown on the ammeter will tell immediately if the alternator system is operating normally, as the amount of current shown should equal the total amperage drawn by the equipment which is operating.


If no output is indicated on the ammeter during flight, reduce the electrical load by turning off all unnecessary electrical equipment. Check both 5 ampere field breaker and 60 ampere output breaker and reset if open. If neither circuit breaker is open, turn off the "ALT" switch for 1 second to reset the overvoltage relay. If ammeter continues to indicate no output, maintain minimum electrical load and terminate flight as soon as practical.

Maintenance on the alternator should prove to be a minor factor. Should service be required, contact the local Piper Dealer.

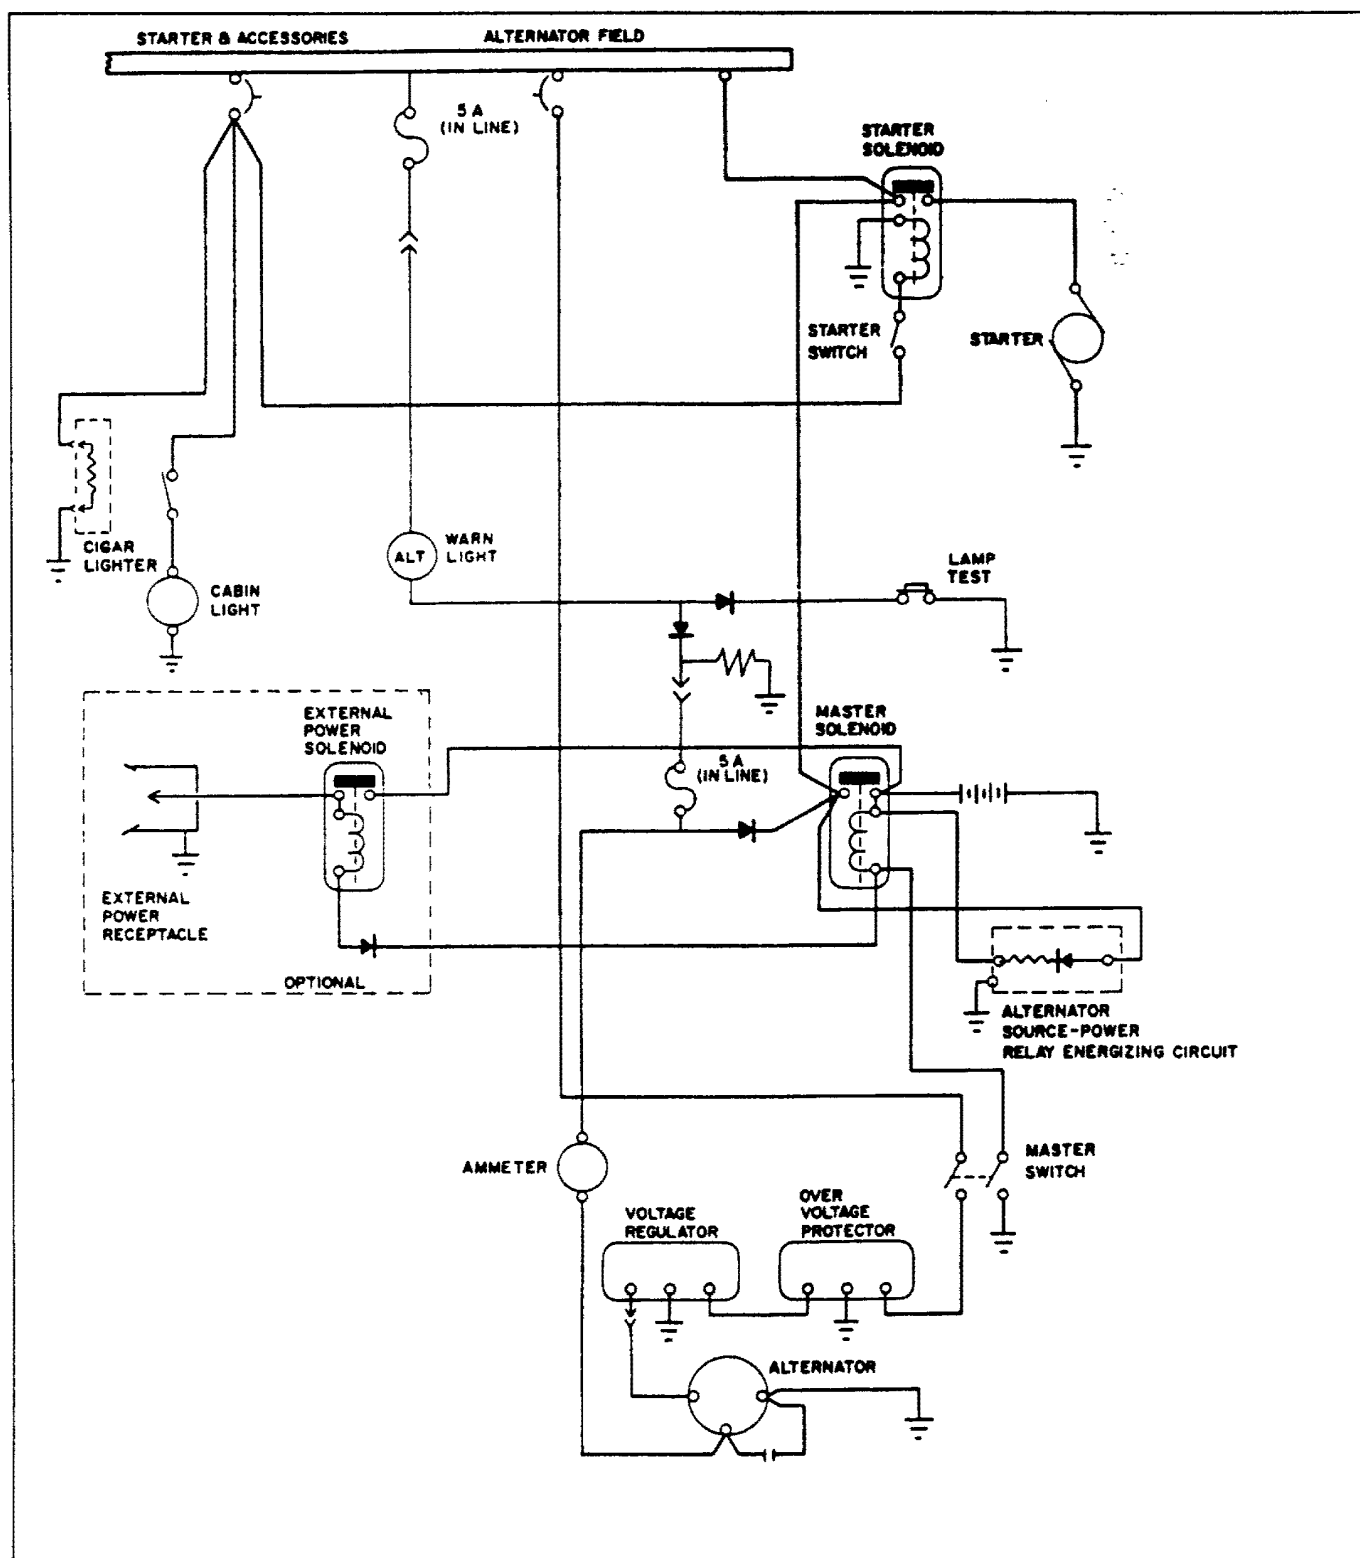

ALTERNATOR AND STARTER SCHEMATIC

Figure 7-11

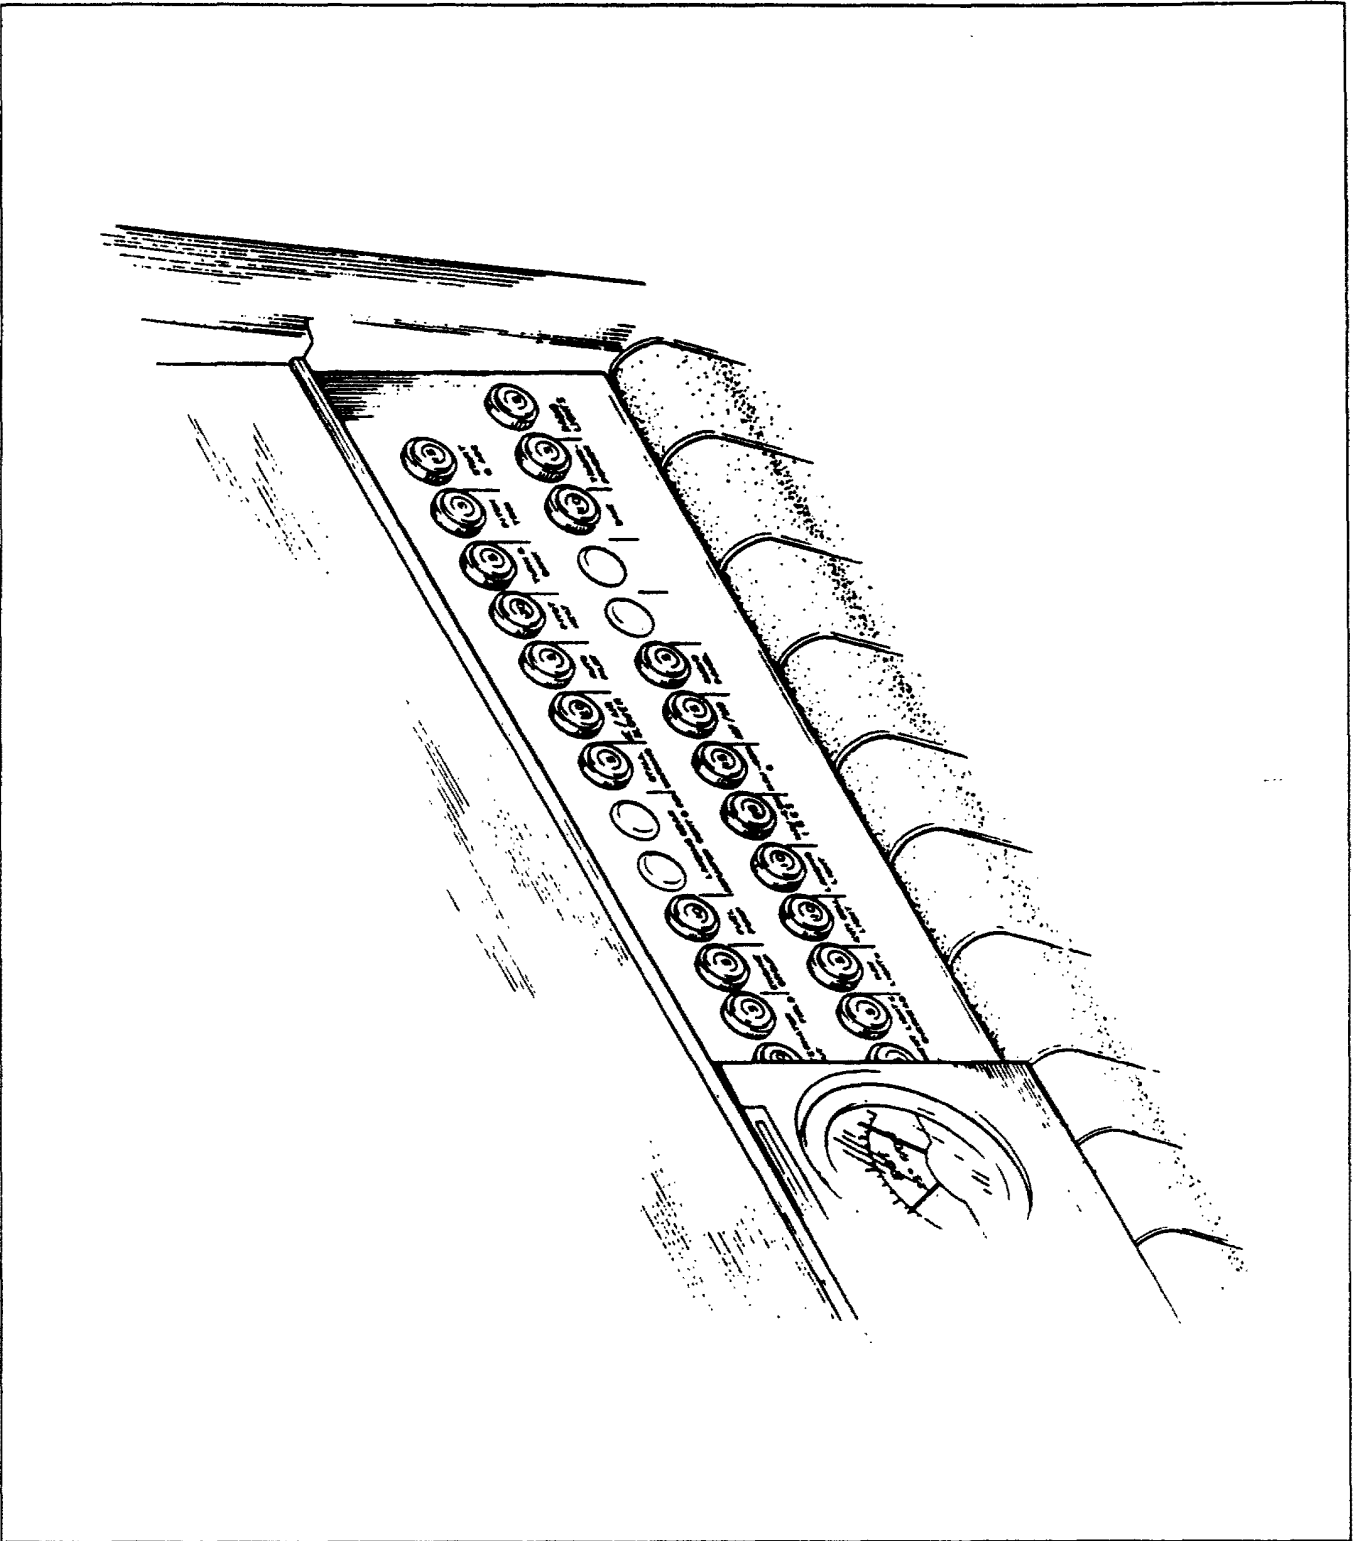

**CIRCUIT BREAKER PANEL**

Figure 7-13



THIS PAGE INTENTIONALLY LEFT BLANK

### 7.17 VACUUM SYSTEM

The vacuum system is designed to operate the air driven gyro instruments. This includes the directional and attitude gyros when installed. The system consists of an engine driven vacuum pump, a vacuum regulator, a filter and the necessary plumbing.


The vacuum pump is a dry type pump which eliminates the need for an air/oil separator and its plumbing. A shear drive protects the pump from damage. If the drive shears, the gyros will become inoperative.

The vacuum gauge, mounted on the right instrument panel to the right of the radios, provides valuable information to the pilot about the operation of the vacuum system. A decrease in pressure in a system that has remained constant over an extended period may indicate a dirty filter, dirty screens, possibly a sticking vacuum regulator or leak in system (a low vacuum indicator light is provided in the annunciator panel). Zero pressure would indicate a sheared pump drive, defective pump, possibly a defective gauge or collapsed line. In the event of any gauge variation from the norm, the pilot should have a mechanic check the system to prevent possible damage to the system components or eventual failure of the system.

A vacuum regulator is provided in the system to protect the gyros. The valve is set so the normal vacuum reads  $5.0 \pm .1$  inches of mercury, a setting which provides sufficient vacuum to operate all the gyros at their rated RPM. Higher settings will damage the gyros and with a low setting the gyros will be unreliable. The regulator is located behind the instrument panel and is accessible from below the instrument panel.

### **7.19 INSTRUMENT PANEL**

The instrument panel (Figure 7-15) of the Cherokee is designed to accommodate the customary advanced flight instruments and the normally required power plant instruments. The artificial horizon and directional gyro are vacuum operated through use of a vacuum pump installed on the engine, while the turn and back instrument is electrically operated. A vacuum gauge is mounted on the far right side of the instrument panel. A natural separation of the flight group and power group is provided by the placement of the flight group in the upper instrument panel and the power group in the center and lower instrument panels. The radios and circuit breakers are on the right hand instrument panel. Extra circuits are provided for a complete line of optional radio equipment. An annunciator panel is mounted in the upper instrument panel to warn the pilot of a possible malfunction in the alternator, oil pressure, or vacuum systems.

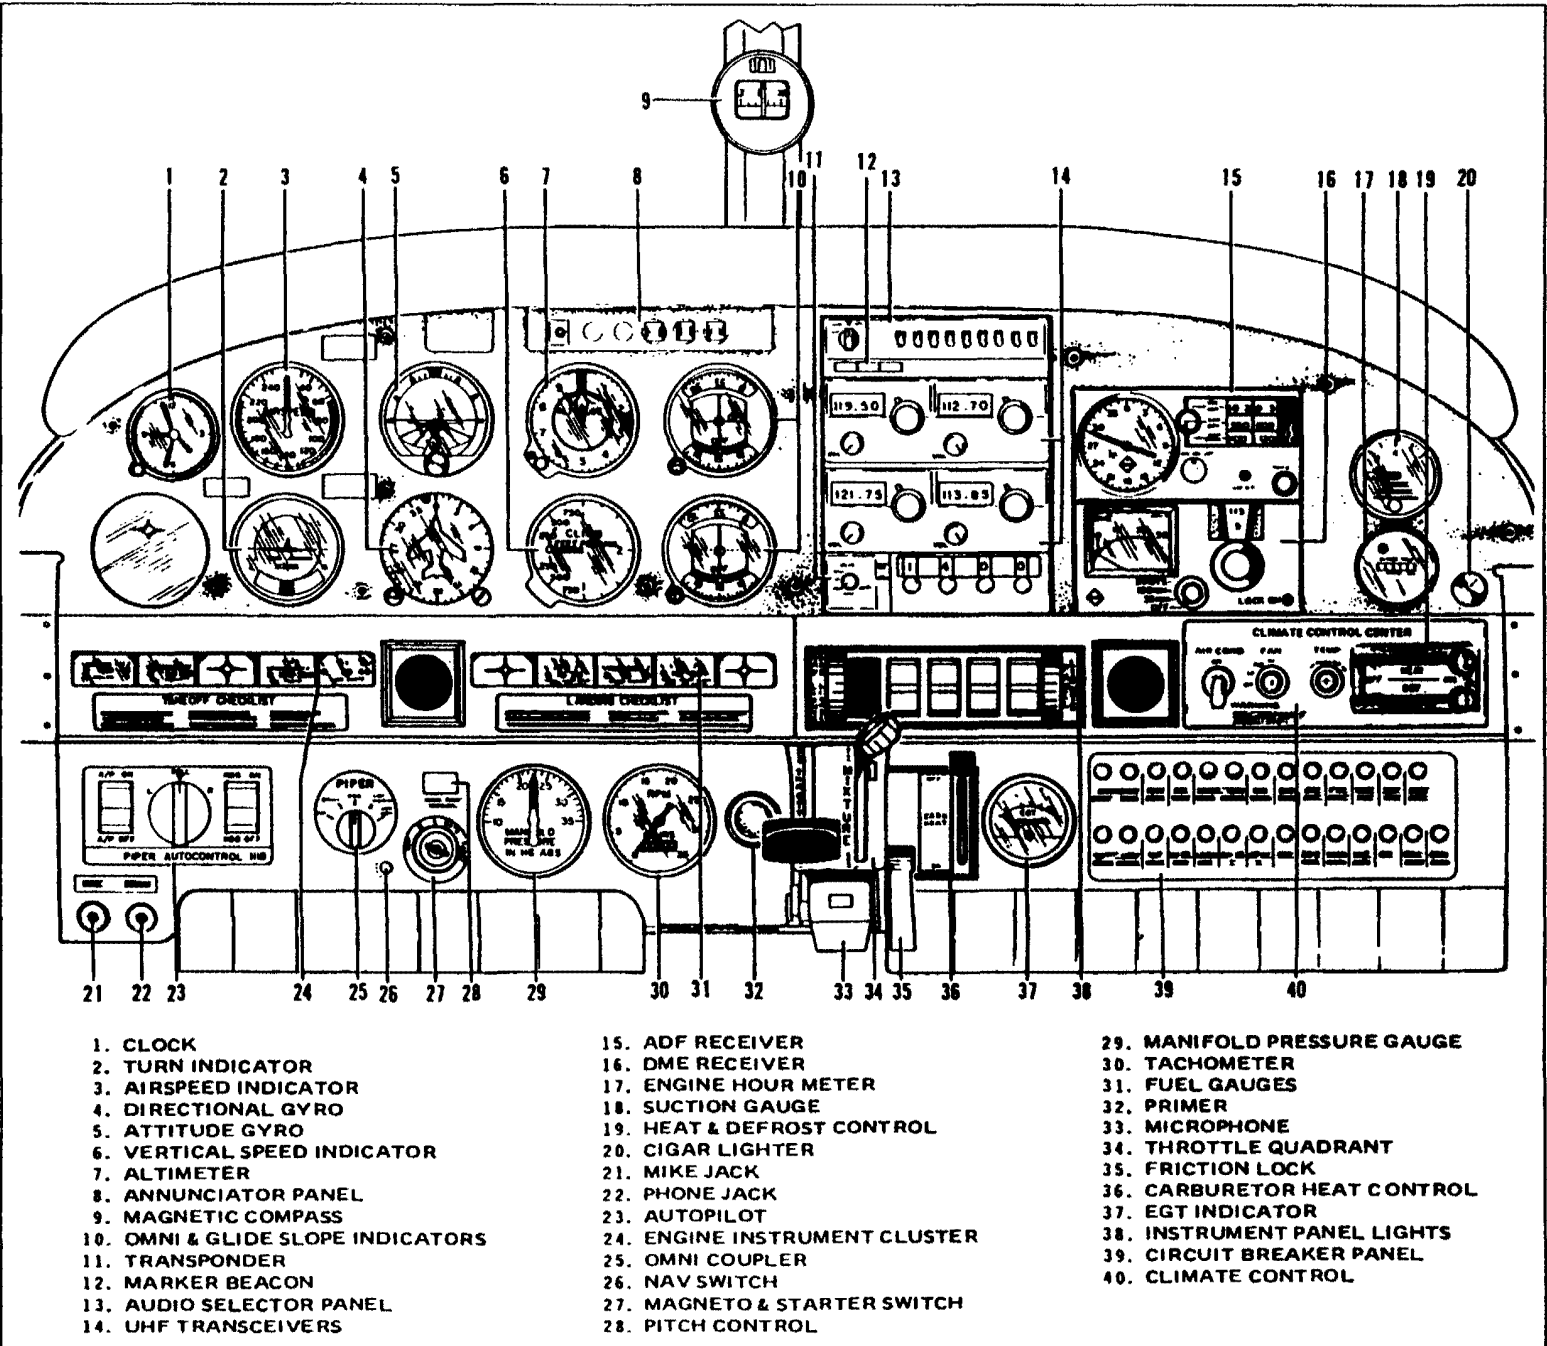

INSTRUMENT PANEL

Figure 7-15

## **7.21 PITOT-STATIC SYSTEM**

The system supplies both pitot and static pressure for the airspeed indicator, altimeter, and the optional vertical speed indicator (Figure 7-17).

Pitot and static pressure are picked up by a pitot head installed on the bottom of the left wing and carried through pitot and static lines within the wing and fuselage to the gauges on the instrument panel.

A static valve, which is mounted to the knee guard below the instrument panel on the left side, provides an alternate static source for the system when opened.


Both the pitot and static lines can be drained through separate drain valves located on the left lower side of the fuselage interior.

A heated pitot head, which alleviates problems with icing and heavy rain, is available as optional equipment. The switch for the heated pitot head is located on the electrical switch panel to the left of the right control wheel.

To prevent bugs and water from entering the pitot and static pressure holes, a cover should be placed over the pitot head. A partially or completely blocked pitot head will give erratic or zero readings on the instruments.


### **NOTE**

During the preflight, check to make sure the pitot cover is removed.

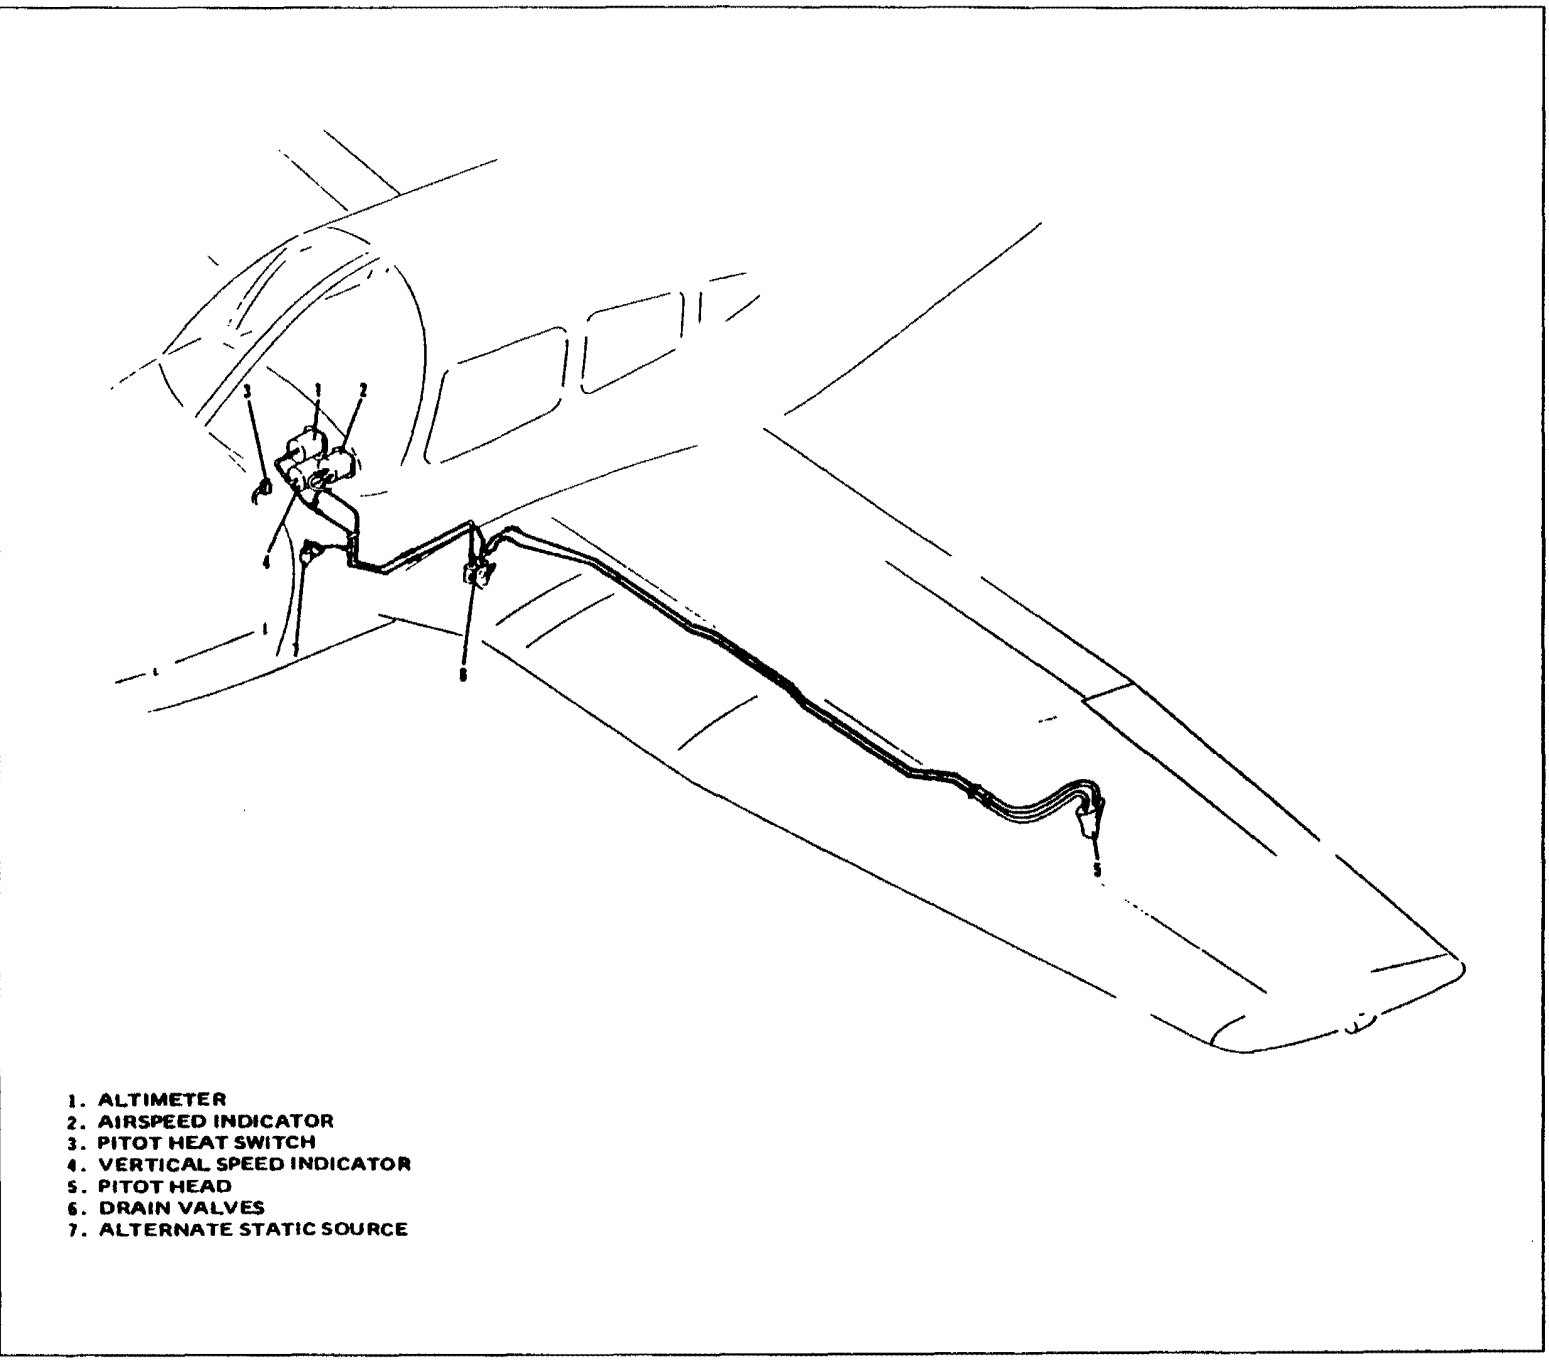

PITOT-STATIC SYSTEM

Figure 7-17

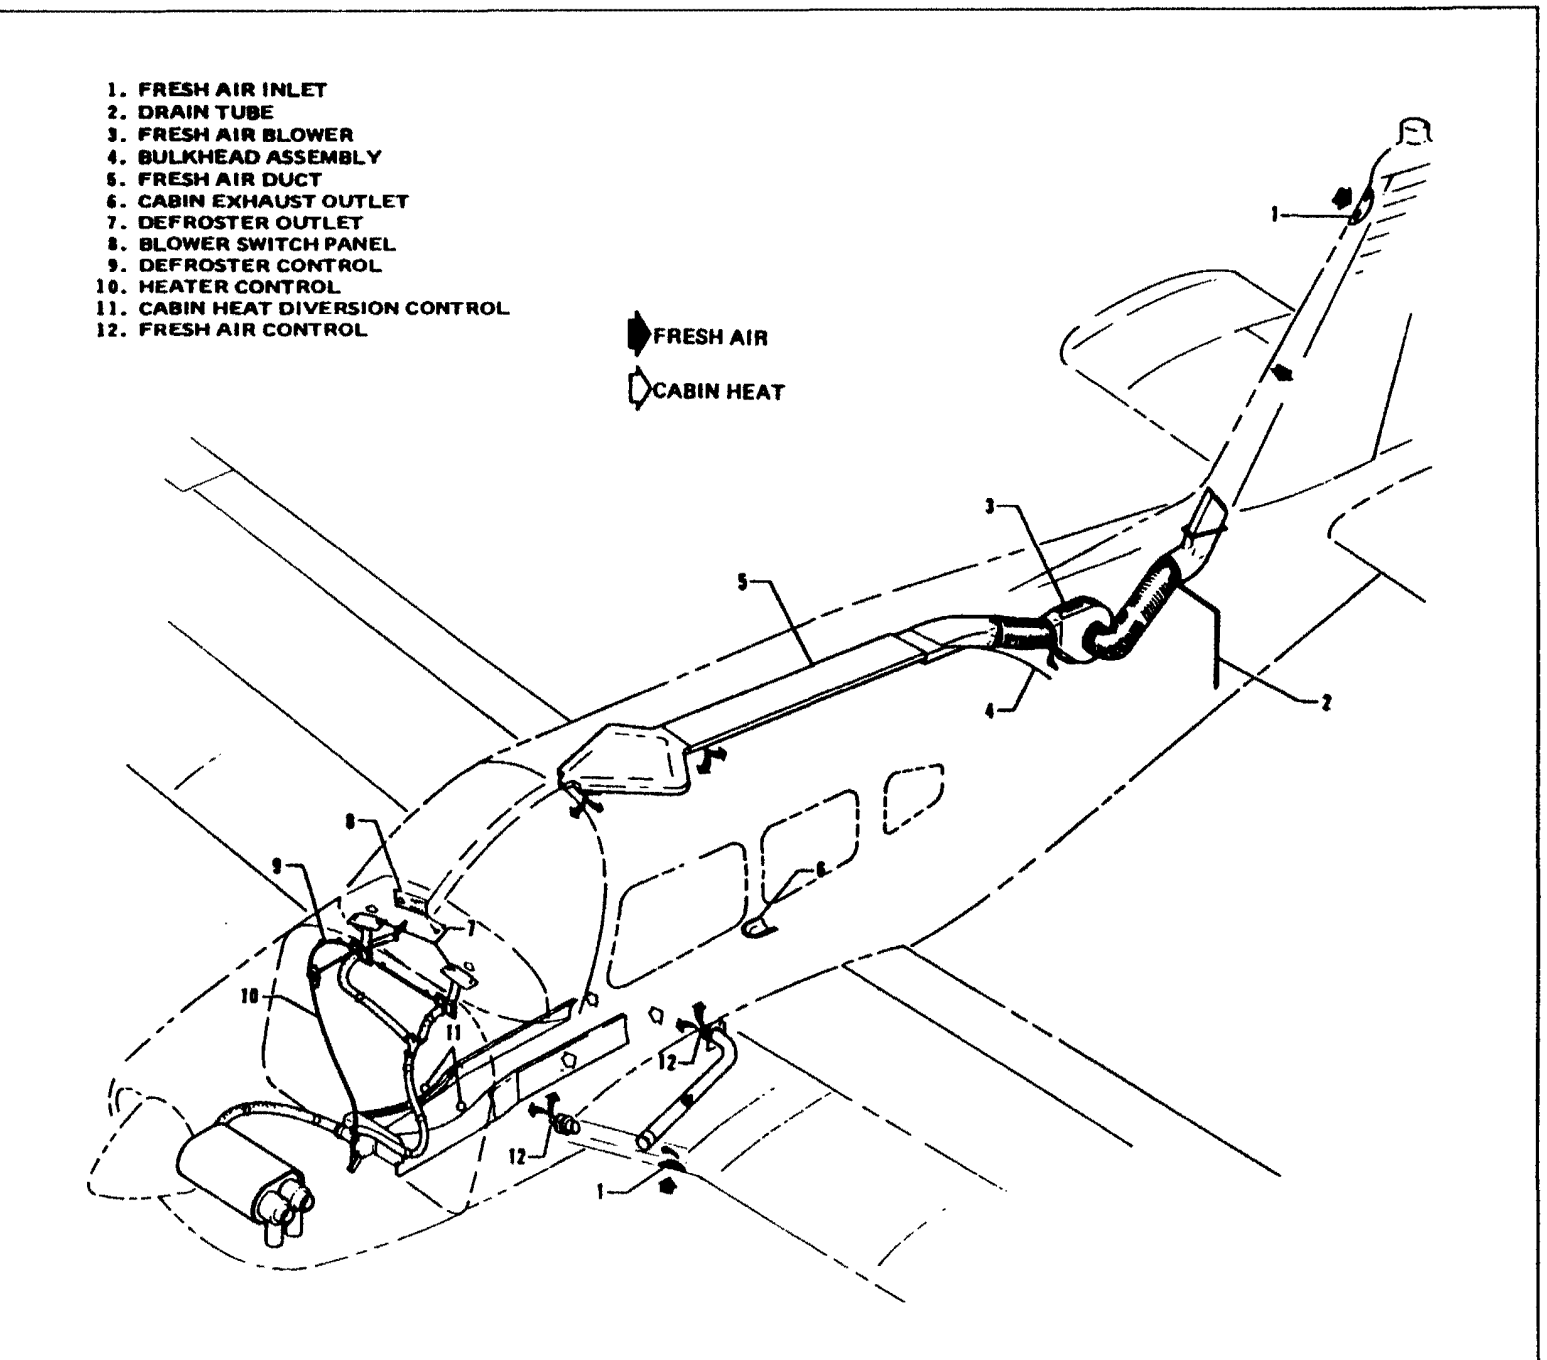

HEATING AND VENTILATING SYSTEM

Figure 7-19

### **7.23 HEATING AND VENTILATING SYSTEM**

Heat for the cabin interior and the defroster system is provided by a heater muff attached to the exhaust system (Figure 7-19). The amount of heat desired can be regulated with the controls located on the far right side of the instrument panel.

The air flow can be regulated between the front and rear seats by levers located on top of the heat ducts next to the console.

#### **CAUTION**

When cabin heat is operated, heat duct surface becomes hot. This could result in burns if arms or legs are placed too close to heat duct outlets or surface.

Fresh air inlets are located in the leading edge of the wing at the intersection of the tapered and straight sections. A large adjustable outlet is located on the side of the cabin near the floor at each seat location; overhead air outlets are offered as optional equipment. Air is exhausted through an outlet under the rear seat. A cabin air blower, incorporated in the ventilating system, is also available as optional equipment. An optional overhead ventilating system with a cabin air blower is available on models without air conditioning. This blower is operated by a "FAN" switch with 4 positions - "OFF," "LOW," "MED," or "HIGH."

### **7.25 CABIN FEATURES**

For ease of entry and exit and pilot-passenger comfort, the front seats are adjustable fore and aft. The back of the right front seat contains two latches, an outboard latch which allows the seat to be moved forward or aft for ease of entry, and an inboard latch which allows the seat back to be tilted forward to allow easy entry to the rear seats. The rear seats are easily removed to provide room for bulky items. Some rear seat installations incorporate leg retainers with latching mechanisms which must be released before the rear seats can be removed. Releasing the retainers is easily accomplished by turning the latching mechanisms 90° with a coin or screwdriver. Armrests are also provided for the front seats. All seats are available with optional headrests and optional vertical adjustment may be added to the front seats.

The cabin interior includes a pilot storm window, two sun visors, ash trays, two map pockets, and pockets on the backs of each front seat.

A single strap shoulder harness controlled by an inertia reel is standard equipment for the front seats, and is offered as an option for the rear seats. The shoulder strap is routed over the shoulder adjacent to the windows and attached to the lap belt in the general area of the person's inboard hip.

A check of the inertia reel mechanism is made by pulling sharply on the strap. The reel will lock in place under this test and prevent the strap from extending. Under normal movement the strap will extend and retract as required.



### **7.27 BAGGAGE AREA**

A 24 cubic foot baggage area, located behind the rear seats, is accessible either from the cabin or through a large 20 x 22 inch outside baggage door on the right side of the aircraft. Maximum capacity is 200 pounds. Tie-down straps are provided and should be used at all times.

#### **NOTE**

It is the pilot's responsibility to be sure when the baggage is loaded that the aircraft C.G. falls within the allowable C.G. Range (refer to Section 6 - Weight and Balance).

### **7.29 STALL WARNING**

An approaching stall is indicated by a small warning horn which is activated between five and ten miles per hour above stall speed. Mild airframe buffeting and gentle pitching may also precede the stall. Stall speeds are shown on graphs in the Performance Section. The stall warning horn emits a continuous sound and is activated by a lift detector installed on the leading edge of the left wing. During preflight, the stall warning system should be checked by turning the master switch "ON," lifting the detector and checking to determine if the horn is actuated.

### **7.31 FINISH**

All exterior surfaces are primed with etching primer and finished with a durable acrylic lacquer in a variety of tasteful colors to suit individual owners. To keep a new look, economy size "Touch-Up" spray paint cans are available from Piper Dealers.

### **7.33 AIR CONDITIONING\***

The air conditioning system is a recirculating air system. The major items include; evaporator, condenser, compressor, blower, switches and temperature controls.

The evaporator is located behind the left rear side of the baggage compartment. This cools the air that is used for air conditioning.

The condenser is mounted on a retractable scoop located on the bottom of the fuselage and to the rear of the baggage compartment area. The scoop extends when the air conditioner is "ON" and retracts to a flush position when the system is "OFF."

The compressor is mounted on the forward right underside of the engine. It has an electric clutch which automatically engages or disengages the compressor to the belt drive system of the compressor.

An electrical blower is mounted on the aft side of the rear cabin panel. Air from the baggage area is drawn through the evaporator by the blower and distributed through an overhead duct to individual outlets located adjacent to each occupant.

The switches and temperature control are located on the lower right side of the instrument panel in the climate control center panel. The temperature control regulates the desired temperature of the cabin. Turn the control clockwise for increased cooling, counterclockwise for decreased cooling.

Located inboard of the temperature control is the fan speed switch and the air conditioning "ON-OFF" switch. The fan can be operated independently of the air conditioning. However, it must be on for air conditioner operation. Turning either switch off will disengage the compressor clutch and retract the condenser door. Cooling air should be felt within one minute after the air conditioner is turned on.

#### **NOTE**

If the system is not operating in 5 minutes, turn the system "OFF" until the fault is corrected.

The "FAN" switch allows operation of the fan with the air conditioner turned "OFF" to aid cabin air circulation if desired. A "LOW," "MED" or "HIGH" flow of air can be selected to the air conditioner outlets located in the overhead duct. The outlets can be adjusted or turned off by each occupant to regulate individual cooling effect.

The "DOOR OPEN" indicator light is located to the left of the radio stack in front of the pilot. The light illuminates whenever the condenser door is open and remains on until the door is closed.

A circuit breaker located on the circuit breaker panel protects the air conditioning electrical system.

Whenever the throttle is in the full throttle position, it actuates a micro switch which disengages the compressor and retracts the scoop. This is done to obtain maximum power and maximum rate of climb. The fan continues to operate and the air will remain cool for approximately one minute. When the throttle is retarded approximately 1/4 inch, the clutch will engage and the scoop will extend, again supplying cool, dry air.

\*Optional equipment

### **7.35 PIPER EXTERNAL POWER\***

An optional starting installation known as Piper External Power (PEP) is accessible through a receptacle located on the right side of the fuselage aft of the wing. An external battery can be connected to the socket, thus allowing the operator to crank the engine without having to gain access to the airplane's battery.

### **7.37 EMERGENCY LOCATOR TRANSMITTER\***

The Emergency Locator Transmitter (ELT) when installed, is located in the aft portion of the fuselage just below the stabilator leading edge and is accessible through a plate on the right side of the fuselage. This plate is attached with three slotted-head nylon screws for ease of removal; these screws may be readily removed with a variety of common items such as a dime, a key, a knife blade, etc. If there are no tools available in an emergency the screw heads may be broken off by any means. The ELT is an emergency locator transmitter which meets the requirements of FAR 91.52. The unit operates on a self-contained battery.

The replacement date as required by FAA regulations is marked on the transmitter label. The battery should also be replaced if the transmitter has been used in an emergency situation or if accumulated test time exceeds one hour. The unit is equipped with a portable antenna to allow the locator to be moved from the airplane in case of emergency and used as a portable signal transmitter.

On the unit itself is a three position selector switch placarded "OFF," "ARM" and "ON." The "ARM" position is provided to set the unit to the automatic position so that it will transmit only after impact and will continue to transmit until the battery is drained to depletion or until the switch is manually moved to the "OFF" position. The "ARM" position is selected when the transmitter is installed at the factory and the switch should remain in that position whenever the unit is installed in the airplane. The "ON" position is provided so the unit can be used as a portable transmitter or in the event the automatic feature was not triggered by impact or to periodically test the function of the transmitter.

Select the "OFF" position when changing the battery, when rearming the unit if it has been activated for any reason, or to discontinue transmission.

#### **NOTE**

If the switch has been placed in the "ON" position for any reason, the "OFF" position has to be selected before selecting "ARM." If "ARM" is selected directly from the "ON" position, the unit will continue to transmit in the "ARM" position.

\*Optional equipment

A pilot's remote switch, located on the left side panel, is provided to allow the transmitter to be controlled from inside the cabin.

1. On some models the pilot's remote switch has three positions and is placarded "ON," "AUTO/ARM," and "OFF/RESET." The switch is normally left in the "AUTO/ARM" position. To turn the transmitter off, move the switch momentarily to the "OFF/RESET" position. The aircraft master switch must be "ON" to turn the transmitter "OFF." To activate the transmitter for tests or other reasons, move the switch upward to the "ON" position and leave it in that position as long as transmission is desired.
2. On other models the pilot's remote switch has two positions and is placarded "ON/RESET" and "ARM (NORMAL POSITION)." The switch is normally left in the down or "ARM" position. To turn the transmitter off, move the switch to the "ON/RESET" position for one second then return it to the "ARM" position. To activate the transmitter for tests or other reasons, move the switch upward to the "ON/RESET" position and leave it in that position as long as transmission is desired.

THIS PAGE INTENTIONALLY LEFT BLANK

## TABLE OF CONTENTS

### SECTION 8

#### AIRPLANE HANDLING, SERVICING AND MAINTENANCE

| Paragraph<br>No. |                                   | Page<br>No. |
|------------------|-----------------------------------|-------------|
| 8.1              | General .....                     | 8-1         |
| 8.3              | Airplane Inspection Periods ..... | 8-3         |
| 8.5              | Preventive Maintenance .....      | 8-4         |
| 8.7              | Airplane Alterations .....        | 8-5         |
| 8.9              | Ground Handling .....             | 8-6         |
| 8.11             | Engine Air Filter .....           | 8-8         |
| 8.13             | Brake Service .....               | 8-8         |
| 8.15             | Landing Gear Service .....        | 8-10        |
| 8.17             | Propeller Service .....           | 8-11        |
| 8.19             | Oil Requirements .....            | 8-11        |
| 8.21             | Fuel System .....                 | 8-11        |
| 8.23             | Tire Inflation .....              | 8-13        |
| 8.25             | Battery Service .....             | 8-13        |
| 8.27             | Cleaning .....                    | 8-13        |

## **SECTION 8**

### **AIRPLANE HANDLING, SERVICING, AND MAINTENANCE**

#### **8.1 GENERAL**

This section provides general guidelines relating to the handling, servicing, and maintenance of the Archer II. For complete maintenance instructions, refer to the PA-28 Service Manual.

Every owner should stay in close contact with an authorized Piper Service Center or Piper's Customer Services Department to obtain the latest information pertaining to their airplane, and to avail themselves of Piper Aircraft's support systems.

Piper Aircraft Corporation takes a continuing interest in having owners get the most efficient use from their airplane and keeping it in the best mechanical condition. Consequently, Piper Aircraft, from time to time, issues service releases including Service Bulletins, Service Letters, Service Spares Letters, and others relating to the airplane.

Piper Service Bulletins are of special importance and Piper considers compliance mandatory. These are sent directly to the latest FAA-registered owners in the United States (U.S.) and Piper Service Centers worldwide. Depending on the nature of the release, material and labor allowances may apply. This information is provided to all authorized Piper Service Centers.

Service Letters deal with product improvements and servicing techniques pertaining to the airplane. They are sent to Piper Service Centers and, if necessary, to the latest FAA-registered owners in the U.S. Owners should give careful attention to Service Letter information.

Service Spares Letters offer improved parts, kits, and optional equipment which were not available originally, and which may be of interest to the owner.

Piper Aircraft Corporation offers a subscription service for Service Bulletins, Service Letters, and Service Spares Letters. This service is available to interested persons such as owners, pilots, and mechanics at a nominal fee, and may be obtained through an authorized Piper Service Center or Piper's Customer Services Department.

Service manuals, parts catalogs, and revisions to both, are available from Piper Service Centers or Piper's Customer Services Department.

Any correspondence regarding the airplane should include the airplane model and serial number to ensure proper response.

THIS PAGE INTENTIONALLY LEFT BLANK



### **8.3 AIRPLANE INSPECTION PERIODS**

Piper Aircraft Corporation has developed inspection items and required inspection intervals for the PA-28 (see PA-28 Service and Inspection Manuals). The PA-28 Service Manual contains appropriate forms, and all inspection procedures should be complied with by a properly trained, knowledgeable, and qualified mechanic at an authorized Piper Service Center or a reputable repair shop. Piper Aircraft Corporation cannot accept responsibility for the continued airworthiness of any aircraft not maintained to these standards, and/or not brought into compliance with applicable Service Bulletins issued by Piper Aircraft Corporation, instructions issued by the engine, propeller, or accessory manufacturers, or Airworthiness Directives issued by the FAA.

A Progressive Inspection, approved by the Federal Aviation Administration (FAA), is also available to the owner. This involves routine and detailed inspections to allow maximum utilization of the airplane. Maintenance inspection costs are reduced, and the maximum standard of continued airworthiness is maintained. Complete details are available from Piper Aircraft Corporation.

In addition, but in conjunction with the above, the FAA requires periodic inspections on all aircraft to keep the Airworthiness Certificate in effect. The owner is responsible for assuring compliance with these inspection requirements and for maintaining proper documentation in logbooks and/or maintenance records.

A spectrographic analysis of the engine oil is available from several sources. This inspection, if performed properly, provides a good check of the internal condition of the engine. To be accurate, induction air filters must be cleaned or changed regularly, and oil samples must be taken and sent in at regular intervals.

## **8.5 PREVENTIVE MAINTENANCE**

The holder of a pilot certificate issued under Federal Aviation Regulations (FAR) Part 61 may perform certain preventive maintenance as defined in the FARs. This maintenance may be performed only on an aircraft which the pilot owns and operates, and which is not used in air carrier or air taxi/commercial operations service.

All other aircraft maintenance must be accomplished by a person or facility appropriately certificated by the Federal Aviation Administration (FAA) to perform that work.

Anytime maintenance is accomplished, an entry must be made in the appropriate aircraft maintenance records. The entry shall include:

- (1) The date the work was accomplished.
- (2) Description of the work.
- (3) Number of hours on the aircraft.
- (4) The certificate number of pilot performing the work.
- (5) Signature of the individual doing the work.

## **8.7 AIRPLANE ALTERATIONS**

If the owner desires to have his aircraft modified, he must obtain FAA approval for the alteration. Major alterations accomplished in accordance with Advisory Circular 43.13-2, when performed by an A & P mechanic, may be approved by the local FAA office. Major alterations to the basic airframe or systems not covered by AC 43.13-2 require a Supplemental Type Certificate.

The owner or pilot is required to ascertain that the following Aircraft Papers are in order and in the aircraft.

- (a) To be displayed in the aircraft at all times:
  - (1) Aircraft Airworthiness Certificate Form FAA-8100-2.
  - (2) Aircraft Registration Certificate Form FAA-8050-3.
  - (3) Aircraft Radio Station License if transmitters are installed.
  
- (b) To be carried in the aircraft at all times:
  - (1) Pilot's Operating Handbook.
  - (2) Weight and Balance data plus a copy of the latest Repair and Alteration Form FAA-337, if applicable.
  - (3) Aircraft equipment list.

Although the aircraft and engine logbooks are not required to be in the aircraft, they should be made available upon request. Logbooks should be complete and up to date. Good records will reduce maintenance cost by giving the mechanic information about what has or has not been accomplished.

## **8.9 GROUND HANDLING**

### **(a) Towing**

The airplane may be moved on the ground by the use of the nose wheel steering bar that is stowed below the forward ledge of the baggage compartment or by power equipment that will not damage or excessively strain the nose gear steering assembly. Towing lugs are incorporated as part of the nose gear fork.

#### **CAUTION**

When towing with power equipment, do not turn the nose gear beyond its steering radius in either direction, as this will result in damage to the nose gear and steering mechanism.

#### **CAUTION**

Do not tow the airplane when the controls are secured.

In the event towing lines are necessary, ropes should be attached to both main gear struts as high up on the tubes as possible. Lines should be long enough to clear the nose and/or tail by not less than fifteen feet, and a qualified person should ride in the pilot's seat to maintain control by use of the brakes.

### **(b) Taxiing**

Before attempting to taxi the airplane, ground personnel should be instructed and approved by a qualified person authorized by the owner. Engine starting and shut-down procedures as well as taxi techniques should be covered. When it is ascertained that the propeller back blast and taxi areas are clear, power should be applied to start the taxi roll, and the following checks should be performed:

- (1) Taxi a few feet forward and apply the brakes to determine their effectiveness.
- (2) While taxiing, make slight turns to ascertain the effectiveness of the steering.
- (3) Observe wing clearance when taxiing near buildings or other stationary objects. If possible, station an observer outside the airplane.
- (4) When taxiing over uneven ground, avoid holes and ruts.
- (5) Do not operate the engine at high RPM when running up or taxiing over ground containing loose stones, gravel, or any loose material that may cause damage to the propeller blades.

**(c) Parking**

When parking the airplane, be sure that it is sufficiently protected from adverse weather conditions and that it presents no danger to other aircraft. When parking the airplane for any length of time or overnight, it is suggested that it be moored securely.

- (1) To park the airplane, head it into the wind if possible.
- (2) Set the parking brake by pulling back on the brake lever and depressing the knob on the handle. To release the parking brake, pull back on the handle until the catch disengages; then allow the handle to swing forward.

**CAUTION**

Care should be taken when setting brakes that are overheated or during cold weather when accumulated moisture may freeze a brake.

- (3) Aileron and stabilator controls should be secured with the front seat belt and chocks used to properly block the wheels.

**(d) Mooring**

The airplane should be moored for immovability, security and protection. The following procedures should be used for the proper mooring of the airplane:

- (1) Head the airplane into the wind if possible.
- (2) Retract the flaps.
- (3) Immobilize the ailerons and stabilator by looping the seat belt through the control wheel and pulling it snug.
- (4) Block the wheels.
- (5) Secure tie-down ropes to the wing tie-down rings and to the tail skid at approximately 45 degree angles to the ground. When using rope of non-synthetic material, leave sufficient slack to avoid damage to the airplane should the ropes contract.

**CAUTION**

Use bowline knots, square knots or locked slip knots. Do not use plain slip knots.

**NOTE**

Additional preparations for high winds include using tie-down ropes from the landing gear forks and securing the rudder.

- (6) Install a pitot head cover if available. Be sure to remove the pitot head cover before flight.
- (7) Cabin and baggage doors should be locked when the airplane is unattended.

### **8.11 ENGINE AIR FILTER**

#### **(a) Removing Engine Air Filter**

- (1) Remove the lower cowl.**
- (2) Remove the wing nuts securing the filter. Remove the filter.**

#### **(b) Cleaning Engine Air Filter**

The induction air filter must be cleaned at least once every 50 hours, and more often, even daily, when operating in dusty conditions. Extra filters are inexpensive, and a spare should be kept on hand for use as a rapid replacement.

To clean the filter:

- (1) Tap the filter gently to remove dirt particles, being careful not to damage the filter. DO NOT wash the filter in any liquid. DO NOT attempt to blow out dirt with compressed air.**
- (2) If the filter is excessively dirty or shows any damage, replace it immediately.**
- (3) Wipe the filter housing with a clean cloth and install the filter. The usable life of the filter should be restricted to one year or 500 hours, whichever comes first.**


#### **(c) Installation Of Engine Air Filter**

After cleaning or when replacing the filter, install the filter in the reverse order of removal.

### **8.13 BRAKE SERVICE**

The brake system is filled with MIL-H-5606 (petroleum base) hydraulic brake fluid. The fluid level should be checked periodically or at every 50 hour inspection and replenished when necessary. The brake reservoir is located on the fire wall in the engine compartment. If the entire system must be refilled, fill with fluid under pressure from the brake end of the system. This will eliminate air from the system.

No adjustment of the brake clearances is necessary. If after extended service brake blocks become excessively worn, they should be replaced with new segments.

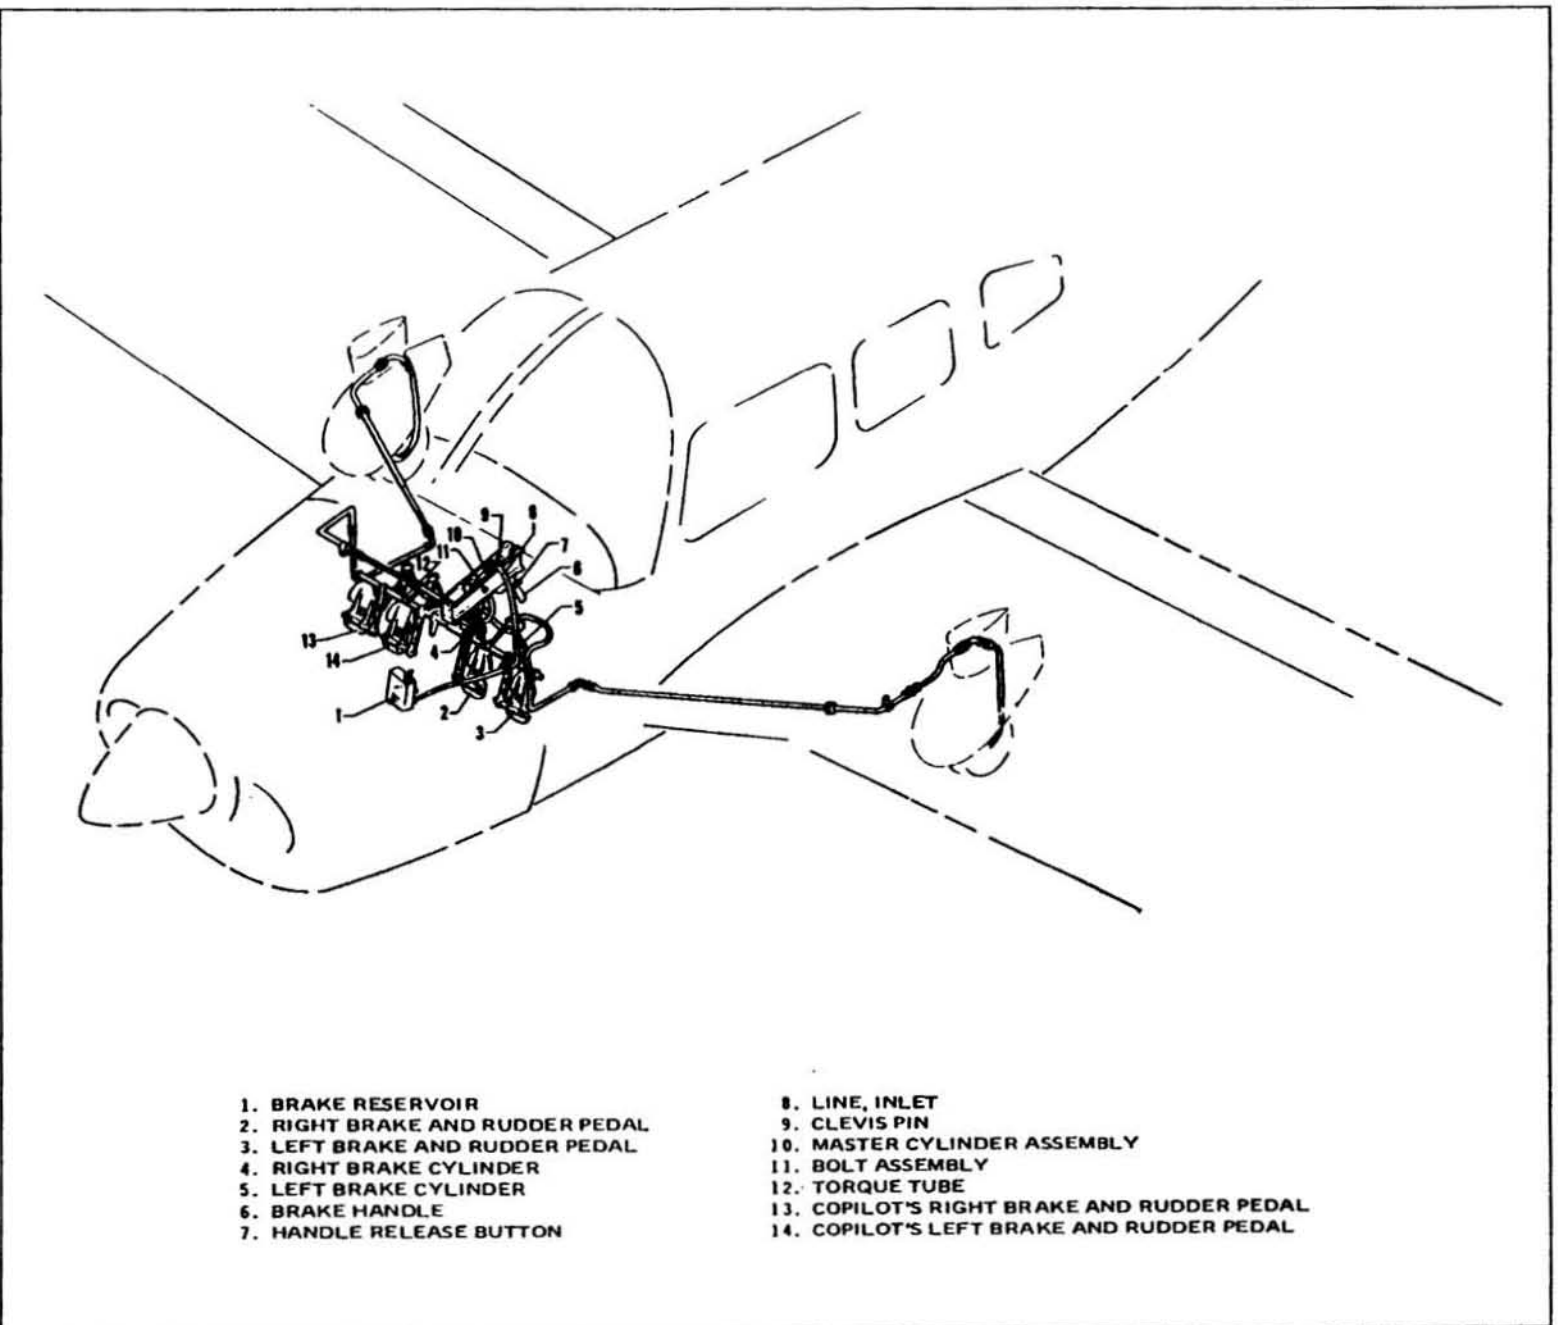

BRAKE SYSTEM

Figure 8-1

### **8.15 LANDING GEAR SERVICE**

The three landing gears use Cleveland Aircraft Products 6.00 x 6, four-ply rating, type III tires and tubes. (Refer to paragraph 8.23.)

Wheels are removed by taking off the hub cap, cotter pin, axle nut, and the two bolts holding the brake segment in place. Mark tire and wheel for reinstallation; then dismount by deflating the tire, removing the three through-bolts from the wheel and separating the wheel halves.

Landing gear oleos on the Cherokee Archer II should be serviced according to the instructions on the units. The main oleos should be extended under normal static load until  $4.50 \pm .25$  inches of oleo piston tube is exposed, and the nose gear should show  $3.25 \pm .25$  inches. Should the strut exposure be below that required, it should be determined whether air or oil is required by first raising the airplane on jacks. Depress the valve core to allow air to escape from the strut housing chamber. Remove the fiber plug and slowly raise the strut to full compression. If the strut has sufficient fluid, it will be visible up to the bottom of the filler plug hole and will then require only proper inflation.

Should fluid be below the bottom of the filler plug hole, oil should be added. Replace the plug with valve core removed; attach a clear plastic hose to the valve stem of the filler plug and submerge the other end in a container of hydraulic fluid. Fully compress and extend the strut several times, thus drawing fluid from the container and expelling air from the strut chamber. To allow fluid to enter the bottom chamber of the main gear strut housing, the torque link assembly must be disconnected to let the strut be extended a minimum of 10 inches (the nose gear torque links need not be disconnected). Do not allow the strut to extend more than 12 inches. When air bubbles cease to flow through the hose, compress the strut fully and again check fluid level. Reinstall the valve core and filler plug, and the main gear torque links, if disconnected.

With fluid in the strut housing at the correct level, attach a strut pump to the air valve and with the airplane on the ground, inflate the oleo strut to the correct height.

In jacking the aircraft for landing gear or other service, two hydraulic jacks and a tail stand should be used. At least 250 pounds of ballast should be placed on the base of the tail stand before the airplane is jacked up. The hydraulic jacks should be placed under the jack points on the bottom of the wing and the airplane jacked up until the tail skid is at the right height to attach the tail stand. After the tail stand is attached and the ballast added, jacking may be continued until the airplane is at the height desired.

The steering arms from the rudder pedals to the nose wheel are adjusted at the nose wheel by turning the threaded rod end bearings in or out. Adjustment is normally accomplished at the forward end of the rods and should be done in such a way that the nose wheel is in line with the fore and aft axis of the plane when the rudder pedals and rudder are centered. Alignment of the nose wheel can be checked by pushing the airplane back and forth with the rudder centered to determine that the plane follows a perfectly straight line. The turning arc of the nose wheel is  $30.0^\circ \pm 2^\circ$  in either direction and is limited by stops on the bottom of the forging.

The rudder pedal arm stops should be carefully adjusted so that the pedal arms contact the stops just after the rudder hits its stops. This guarantees that the rudder will be allowed to move through its full travel.



### 8.17 PROPELLER SERVICE

The spinner and backing plate should be frequently cleaned and inspected for cracks. Before each flight the propeller should be inspected for nicks, scratches, and corrosion. If found, they should be repaired as soon as possible by a rated mechanic, since a nick or scratch causes an area of increased stress which can lead to serious cracks or the loss of a propeller tip. The back face of the blades should be painted when necessary with flat black paint to retard glare. To prevent corrosion, the surface should be cleaned and waxed periodically.

### 8.19 OIL REQUIREMENTS

The oil capacity of the Lycoming O-360-A4M series engines is 8 quarts and the minimum safe quantity is 2 quarts. It is recommended that engine oil be drained and renewed every 50 hours. The oil filter element should be changed every 50 hours of operation. The interval between oil and oil filter changes should not exceed a total of four (4) months. Under unfavorable dusty conditions, the oil and oil filter should be changed more frequently.

It is recommended that single or multi viscosity aviation grade oils in accordance with latest issue of Textron Lycoming Service Instruction 1014 be used. The following seasonal aviation oil grades and seasonal ambient temperature ranges are recommended:

| Average Ambient Temperature | MIL-6082B Mineral SAE Grade | MIL-L-22851 Ashless Dispersant SAE Grades |
|-----------------------------|-----------------------------|-------------------------------------------|
| All Temperatures            | --                          | 15W-50 or 20W-50                          |
| Above 80°F                  | 60                          | 60                                        |
| Above 60°F                  | 50                          | 40 or 50                                  |
| 30°F to 90°F                | 40                          | 40                                        |
| 0°F to 70°F                 | 30                          | 30, 40 or 20W-40                          |
| 0°F to 90°F                 | 20W-50                      | 20W-50 or 15W-50                          |
| Below 10°F                  | 20                          | 30 or 20W-30                              |

When operating temperatures overlap indicated ranges, use the lighter grade oil.

#### NOTE

Refer to the latest issue of Textron Lycoming Service Instruction 1014 (Lubricating Oil Recommendations) for further information.

### 8.21 FUEL SYSTEM

#### (a) Servicing Fuel System

Refer to the PA-28 Cherokee Service Manual and Periodic Inspection Report for fuel system servicing and inspection.

#### (b) Fuel Requirements (AVGAS ONLY)

Aviation grade fuel with a minimum octane of 100/130 must be used in this airplane. Since the use of lower grades can cause serious damage in a short period of time, the engine warranty is invalidated by the use of lower octanes. Refer to latest issue of Textron Lycoming Service Instruction No. 1070 for alternate fuels and additional information.

THIS PAGE INTENTIONALLY LEFT BLANK

A summary of the current grades as well as the previous fuel designations is shown in the following chart:

FUEL GRADE COMPARISON CHART

| Previous Commercial<br>Fuel Grades (ASTM-D910) |        |                          | Current Commercial<br>Fuel Grades (ASTM-D910-75) |       |                          | Current Military<br>Fuel Grades (MIL-G-5572F) |        |                          |
|------------------------------------------------|--------|--------------------------|--------------------------------------------------|-------|--------------------------|-----------------------------------------------|--------|--------------------------|
| Grade                                          | Color  | Max. TEL<br>ml/U.S. gal. | Grade                                            | Color | Max. TEL<br>ml/U.S. gal. | Grade                                         | Color  | Maxi TEL<br>ml/U.S. gal. |
| 80/87                                          | red    | 0.5                      | 80                                               | red   | 0.5                      | 80/87                                         | red    | 0.5                      |
| 91/96                                          | blue   | 2.0                      | *100LL                                           | blue  | 2.0                      | none                                          | none   | none                     |
| 100/130                                        | green  | 3.0                      | 100                                              | green | **3.0                    | 100/130                                       | blue   | 2.0                      |
| 115/145                                        | purple | 4.6                      | none                                             | none  | none                     | 115/145                                       | purple | 4.6                      |

\* - Grade 100LL fuel in some overseas countries is currently colored green and designated as "100L."


\*\* - Commercial fuel grade 100 and grade 100/130 having TEL content of up to 4 ml/U.S. gallon are approved for use in all engines certificated for use with grade 100/130 fuel.

The operation of the aircraft is approved with an anti-icing additive in the fuel. When an anti-icing additive is used, it must reflect the specification MIL-I 27686, must be uniformly blended with the fuel while refueling, must not exceed .15% by volume of the refueled quantity, and to ensure its effectiveness must be blended at not less than .10% by volume. One and one half liquid ozs. per ten gallons of fuel would fall within this range. A blender supplied by the additive manufacturer should be used. Except for the information contained in this section, the manufacturer's mixing or blending instructions should be carefully followed.

#### CAUTIONS

Assure that the additive is directed into the flowing fuel stream. The additive flow should start after the stop before the fuel flow. Do not permit the concentrated additive to come in contact with the aircraft painted surfaces or the interior surfaces of the fuel tanks.

Some fuels have anti-icing additives preblended in the fuel at the refinery, so no further blending should be performed.

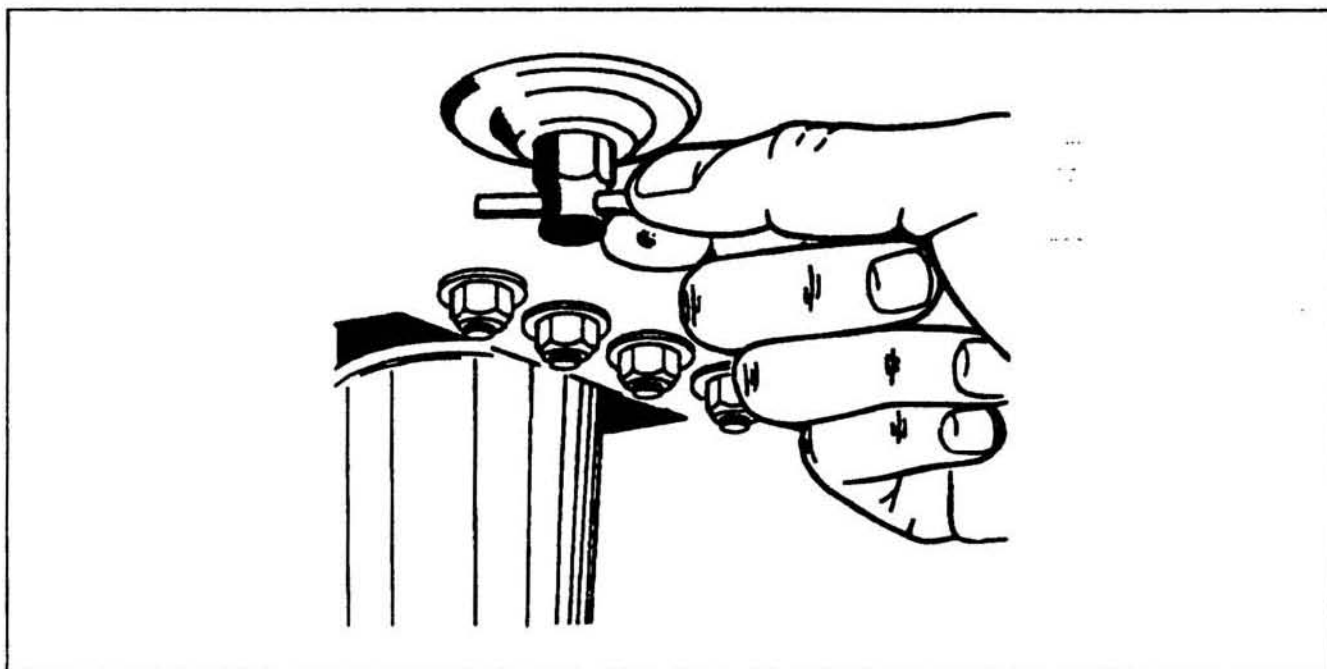

**FUEL DRAIN**

Figure 8-3

(c) Filling Fuel Tanks

Observe all required precautions for handling gasoline. Fuel is stored in two twenty-five gallon (24 gal. usable) tanks.

(d) Draining Fuel Valves and Lines

The fuel system should be drained daily prior to first flight and after refueling to avoid the accumulation of water or sediment. Each fuel tank is equipped with an individual quick drain located at the lower inboard rear corner of the tank. The fuel strainer is equipped with an easy drain valve. It is located on the front lower left corner of the fire wall. It is important that the fuel system be drained in the following manner:

- (1) Open the easy drain valve with the fuel selector valve on one tank, and allow fuel to flow for a few seconds.
- (2) Place a container under the drain and examine the contents for sediment and water.
- (3) When enough fuel has flowed to ensure that the lines and strainers are free of water and sediment, close the drain and dispose of the contents of the container.
- (4) Repeat the procedure with the fuel selector valved changed to the other tank.

**CAUTION**

When draining fuel, be sure that no fire hazard exists before starting the engine.

After using the fuel system quick drain, check from outside the airplane to be sure that it has closed completely and is not leaking.

(e) Draining Fuel System

The bulk of the fuel may be drained from the system by opening the valve at the inboard end of each fuel tank. Push up on the arms of the drain valve and turn counterclockwise to hold the drain open. The remaining fuel in the system may be drained through the filter bowl. Any individual tank may be drained by closing the selector valve and then draining the desired tank.

CAUTION

Whenever the fuel system is completely drained and fuel is replenished it will be necessary to run the engine for a minimum of three minutes at 1000 RPM on each tank to insure that no air exists in the fuel supply lines.

8.23 TIRE INFLATION

For maximum service from the tires, keep them inflated to the proper pressures - 18 psi for the nose gear and 24 psi for the main gear. All wheels and tires are balanced before original installation, and the relationship of tire, tube and wheel should be maintained upon reinstallation. Unbalanced wheels can cause extreme vibration in the landing gear; therefore, in the installation of new components, it may be necessary to rebalance the wheels with the tires mounted. When checking tire pressure, examine the tires for wear, cuts, bruises, and slippage.

8.25 BATTERY SERVICE

Access to the 12-volt battery is through an access panel at the right rear side of the baggage compartment. The battery box has a plastic tube which is normally closed off with a cap and which should be opened occasionally to drain off any accumulation of liquid. The battery should be checked for proper fluid level. DO NOT fill the battery above the baffle plates. DO NOT fill the battery with acid - use water only. A hydrometer check will determine the percent of charge in the battery.

If the battery is not up to charge, recharge starting at a 4 amp rate and finishing with a 2 amp rate. Quick charges are not recommended.

8.27 CLEANING

(a) Cleaning Engine Compartment

Before cleaning the engine compartment, place a strip of tape on the magneto vents to prevent any solvent from entering these units.

- (1) Place a large pan under the engine to catch waste.
- (2) With the engine cowling removed, spray or brush the engine with solvent or a mixture of solvent and degreaser. In order to remove especially heavy dirt and grease deposits, it may be necessary to brush areas that were sprayed.

**CAUTION**

Do not spray solvent into the alternator, vacuum pump, starter, or air intakes.

- (3) Allow the solvent to remain on the engine from five to ten minutes. Then rinse the engine clean with additional solvent and allow it to dry.

**CAUTION**

Do not operate the engine until excess solvent has evaporated or otherwise been removed.

- (4) Remove the protective tape from the magnetos.
- (5) Lubricate the controls, bearing surfaces, etc., in accordance with the Lubrication Chart.

**(b) Cleaning Landing Gear**

Before cleaning the landing gear, place a plastic cover or similar material over the wheel and brake assembly.

- (1) Place a pan under the gear to catch waste.
- (2) Spray or brush the gear area with solvent or a mixture of solvent and degreaser, as desired. Where heavy grease and dirt deposits have collected, it may be necessary to brush areas that were sprayed, in order to clean them.
- (3) Allow the solvent to remain on the gear from five to ten minutes. Then rinse the gear with additional solvent and allow to dry.
- (4) Remove the cover from the wheel and remove the catch pan.
- (5) Lubricate the gear in accordance with the Lubrication Chart.

**(c) Cleaning Exterior Surfaces**

The airplane should be washed with a mild soap and water. Harsh abrasives or alkaline soaps or detergents could make scratches on painted or plastic surfaces or could cause corrosion of metal. Cover areas where cleaning solution could cause damage. To wash the airplane, use the following procedure:

- (1) Flush away loose dirt with water.
- (2) Apply cleaning solution with a soft cloth, a sponge or a soft bristle brush.
- (3) To remove exhaust stains, allow the solution to remain on the surface longer.
- (4) To remove stubborn oil and grease, use a cloth dampened with naphtha.
- (5) Rinse all surfaces thoroughly.
- (6) Any good automotive wax may be used to preserve painted surfaces. Soft cleaning cloths or a chamois should be used to prevent scratches when cleaning or polishing. A heavier coating of wax on the leading surfaces will reduce the abrasion problems in these areas.

(d) Cleaning Windshield and Windows

- (1) Remove dirt, mud and other loose particles from exterior surfaces with clean water.
- (2) Wash with mild soap and warm water or with aircraft plastic cleaner. Use a soft cloth or sponge in a straight back and forth motion. Do not rub harshly.
- (3) Remove oil and grease with a cloth moistened with kerosene.

CAUTION

Do not use gasoline, alcohol, benzene, carbon tetrachloride, thinner, acetone, or window cleaning sprays.

- (4) After cleaning plastic surfaces, apply a thin coat of hard polishing wax. Rub lightly with a soft cloth. Do not use a circular motion.
- (5) A severe scratch or mar in plastic can be removed by rubbing out the scratch with jeweler's rouge. Smooth both sides and apply wax.

(e) Cleaning Headliner, Side Panels and Seats

- (1) Clean headliner, side panels, and seats with a stiff bristle brush, and vacuum where necessary.
- (2) Soiled upholstery, except leather, may be cleaned with a good upholstery cleaner suitable for the material. Carefully follow the manufacturer's instructions. Avoid soaking or harsh rubbing.

CAUTION

Solvent cleaners require adequate ventilation.

- (3) Leather should be cleaned with saddle soap or a mild hand soap and water.

(f) Cleaning Carpets

To clean carpets, first remove loose dirt with a whisk broom or vacuum. For soiled spots and stubborn stains use a nonflammable dry cleaning fluid. Floor carpets may be removed and cleaned like any household carpet.

THIS PAGE INTENTIONALLY LEFT BLANK



## **TABLE OF CONTENTS**

### **SECTION 9**

#### **SUPPLEMENTS**

| <b>Paragraph/Supplement<br/>No.</b> |                                               | <b>Page<br/>No.</b> |
|-------------------------------------|-----------------------------------------------|---------------------|
| 9.1                                 | General .....                                 | 9-1                 |
| 1                                   | Air Conditioning System Installation .....    | 9-3                 |
| 2                                   | AutoFlite II Autopilot Installation .....     | 9-7                 |
| 3                                   | AutoControl IIIB Autopilot Installation ..... | 9-9                 |
| 4                                   | Piper Electric Pitch Trim.....                | 9-13                |

**SECTION 9  
SUPPLEMENTS**

**9.1 GENERAL**

This section provides information in the form of Supplements which are necessary for efficient operation of the airplane when equipped with one or more of the various optional systems and equipment not provided with the standard airplane.

All of the Supplements provided by this section are "FAA Approved" and consecutively numbered as a permanent part of this Handbook. The information contained in each Supplement applies only when the related equipment is installed in the airplane.

THIS PAGE INTENTIONALLY LEFT BLANK

**SUPPLEMENT 1**

**AIR CONDITIONING INSTALLATION**

**SECTION 1 - GENERAL**

This supplement supplies information necessary for the efficient operation of the airplane when the optional air conditioning system is installed. The information contained within this supplement is to be used "as described" in conjunction with the complete handbook.

This supplement has been "FAA Approved" as a permanent part of this handbook and must remain in this handbook at all times when the optional air conditioning system is installed.

**SECTION 2 - LIMITATIONS**

- (a) To insure maximum climb performance the air conditioner must be turned "OFF" manually prior to takeoff to disengage the compressor and retract the condenser door. Also the air conditioner must be turned "OFF" manually before the landing approach in preparation for a possible go-around.
- (b) Placards  
In full view of the pilot, in the area of the air conditioner controls when the air conditioner is installed:

"WARNING - AIR CONDITIONER MUST BE OFF TO INSURE  
NORMAL TAKEOFF CLIMB PERFORMANCE."

In full view of the pilot, to the right of the engine gauges (condenser door light):

"AIR COND DOOR  
OPEN"

**SECTION 3 - EMERGENCY PROCEDURES**

No changes to the basic Emergency Procedures provided by Section 3 of this Pilot's Operating Handbook are necessary for this supplement.

## **SECTION 4 - NORMAL PROCEDURES**

Prior to takeoff, the air conditioner should be checked for proper operation as follows:

- (a) Check aircraft master switch "ON."
- (b) Turn the air conditioner control switch to "ON" and the fan switch to one of the operating positions - the "AIR COND DOOR OPEN" warning light will turn on, thereby indicating proper air conditioner condenser door actuation.
- (c) Turn the air conditioner control switch to "OFF" - the "AIR COND DOOR OPEN" warning light will go out, thereby indicating the air conditioner condenser door is in the up position.
- (d) If the "AIR COND DOOR OPEN" light does not respond as specified above, an air conditioner system or indicator bulb malfunction is indicated and further investigation should be conducted prior to flight.

The above operational check may be performed during flight if an in flight failure is suspected.

The condenser door light is located to the right of the engine instrument cluster in front of the pilot. The door light illuminates when the door is open and is off when the door is closed.

## **SECTION 5 - PERFORMANCE**

Operation of the air conditioner will cause slight decreases in cruise speed and range. Power from the engine is required to run the compressor, and the condenser door, when extended, causes a slight increase in drag. When the air conditioner is turned off there is normally no measurable difference in climb, cruise or range performance of the airplane.

### **NOTE**

To insure maximum climb performance the air conditioner must be turned off manually before takeoff to disengage the compressor and retract the condenser door. Also the air conditioner must be turned off manually before the landing approach in preparation for a possible go-around.

Although the cruise speed and range are only slightly affected by the air conditioner operation, these changes should be considered in preflight planning. To be conservative, the following figures assume that the compressor is operating continuously while the airplane is airborne. This will be the case only in extremely hot weather.

- (a) The decrease in true airspeed is approximately 5 mph at all power settings.
- (b) The decrease in range may be as much as 37 statute miles for the 48 gallon capacity.

The climb performance is not compromised measurably with the air conditioner operating since the compressor is declutched and the condenser door is retracted, both automatically, when a full throttle position is selected. When the full throttle position is not used or in the event of a malfunction which would cause the compressor to operate and the condenser door to be extended, a decrease in rate of climb of as much as 100 fpm can be expected. Should a malfunction occur which prevents condenser door retraction when the compressor is turned off, a decrease in rate of climb of as much as 50 fpm can be expected.

THIS PAGE INTENTIONALLY LEFT BLANK

## **SUPPLEMENT 2**

### **AUTOFLITE II AUTOPILOT INSTALLATION**

#### **SECTION 1 - GENERAL**

This supplement supplies information necessary for the operation of the airplane when the optional AutoFlite II Autopilot is installed. The information contained within this supplement is to be used "as described" in conjunction with the complete handbook.

This supplement has been "FAA Approved" as a permanent part of this handbook and must remain in this handbook at all times when the optional AutoFlite II Autopilot is installed.

#### **SECTION 2 - LIMITATIONS**

- (a) Autopilot use prohibited above 165 MPH CAS.
- (b) Autopilot "OFF" during takeoff and landing.

#### **SECTION 3 - EMERGENCY PROCEDURES**

- (a) In case of malfunction DEPRESS and hold interrupt switch on pilot's control wheel.
- (b) Toggle switch on instrument panel "OFF."
- (c) Unit may be overpowered manually.
- (d) In climb, cruise or descent configuration a malfunction with a 3 second delay in recovery initiation may result in 45° bank and 180' altitude loss. Maximum altitude loss measured at 165 MPH CAS in a descent.
- (e) In approach configuration a malfunction with a 1 second delay in recovery initiation results in 18° bank and 10' altitude loss.

#### **SECTION 4 - NORMAL PROCEDURES**

- (a) Engagement
  - (1) Toggle Switch on instrument panel - ON.
  - (2) Interrupt Switch on left hand side of pilot's control wheel - RELEASED.
- (b) Disengagement
  - (1) Depress Interrupt Switch on pilot's control wheel (or)
  - (2) Toggle Switch on instrument panel - OFF.
- (c) Heading Changes
  - (1) Depress Interrupt Switch, make Heading Change, release Interrupt Switch.
  - (2) Move Trim Knob on instrument for Drift Correction from a constant heading.
  - (3) Move Trim Command Knob on instrument for right or left banked turns.



- (d) OMNI Tracker
  - (1) Center Turn Command Knob and push IN to engage Tracker.
  - (2) Trim Knob - push IN for high sensitivity.

**SECTION 5 - PERFORMANCE**

No changes to the basic performance provided by Section 5 of this Pilot's Operating Handbook are necessary for this supplement.

### **SUPPLEMENT 3**

## **AUTOCONTROL IIIB AUTOPILOT INSTALLATION**

### **SECTION 1 - GENERAL**

This supplement supplies information necessary for the operation of the airplane when the optional Piper AutoControl IIIB Autopilot is installed. The information contained within this supplement is to be used "as described" in conjunction with the complete handbook.

This supplement has been "FAA Approved" as a permanent part of this handbook and must remain in this handbook at all times when the optional Piper AutoControl IIIB Autopilot is installed.

### **SECTION 2 - LIMITATIONS**

- (a) Autopilot use prohibited above 165 MPH CAS.
- (b) Autopilot "OFF" during takeoff and landing.

### **SECTION 3 - EMERGENCY OPERATION**

- (a) In an emergency the AutoControl IIIB can be disconnected by:
  - (1) Pushing the roll ON-OFF Rocker Switch "OFF."
  - (2) Pulling the Autopilot Circuit Breaker.
- (b) The autopilot can be overpowered at either control wheel.
- (c) An autopilot runaway, with a 3 second delay in the initiation of recovery while operating in a climb, cruise or descending flight, could result in a 45° bank and 180' altitude loss. Maximum altitude loss measured at 165 MPH in a descent.
- (d) An autopilot runaway, with a 1 second delay in the initiation of recovery, during an approach operation, coupled or uncoupled, could result in a 18° bank and 10' altitude loss.

### **SECTION 4 - NORMAL PROCEDURES**

#### **PREFLIGHT**

- (a) **AUTOPILOT**
  - (1) Place Radio Coupler in "HDG" Mode (if installed) and place the AP "ON-OFF" switch to the "ON" position to engage roll section. Rotate roll command knob left and right and observe that control wheel describes a corresponding left and right turn, then center knob.
  - (2) Set correct compass heading on D.G. and turn HDG bug to aircraft heading. Engage "HDG" mode rocker switch and rotate HGD bug right and left. Aircraft control wheel should turn same direction as bug. Grasp control wheel and manually override servo, both directions.

**(b) RADIO COUPLER -(OPTIONAL)**

- (1) Tune and identify VOR or VOT station. Position Radio Coupler to OMNI Mode. Engage Autopilot ROLL and HDG switches. Set HDG bug to aircraft heading and rotate O.B.S. to cause OMNI indicator Needle to swing left and right slowly. Observe that control wheel rotates in direction of needle movement.
- (2) Disengage AP "ON-OFF" switch. Reset Radio Coupler control to HDG.

**IN-FLIGHT**

- (a) Trim airplane (ball centered).
- (b) Check air pressure vacuum to ascertain that the directional gyro and attitude gyro are receiving sufficient air.
- (c) Roll Section.
  - (1) To engage, center ROLL knob, push AP "ON-OFF" switch to "ON" position. To turn, rotate console ROLL knob in desired direction. (Maximum angle of bank should not exceed 30°.)
  - (2) For heading mode, set directional gyro with magnetic compass. Push directional gyro HDG knob in, rotate bug to aircraft heading. Push console heading rocker (HDG) switch to "ON" position. To select a new aircraft heading, push D.G. heading knob "IN" and rotate, in desired direction of turn, to the desired heading.
- (d) Radio Coupling — VOR/ILS with Standard directional gyro. (Optional)
  - (1) For VOR Intercepts and Tracking:

Select the desired VOR course and set the HDG bug to the same heading. Select OMNI mode on the coupler and HDG Mode on the autopilot console.
  - (2) For ILS Front Course Intercepts and Tracking:

Tune the localizer frequency and place the HDG bug on the inbound, front course heading. Select LOC-NORM mode on the coupler and HDG mode on the autopilot console.
  - (3) For LOC Back Course Intercepts and Tracking:

Tune the localizer frequency and place the HDG bug on the inbound course heading to the airport. Select LOC-REV mode with coupler and HDG mode on the autopilot console.

**SECTION 5 - PERFORMANCE**

No changes to the basic performance provided by Section 5 of this Pilot's Operating Handbook are necessary for this supplement.

THIS PAGE INTENTIONALLY LEFT BLANK

THIS PAGE INTENTIONALLY LEFT BLANK

**SUPPLEMENT 4**

**PIPER ELECTRIC PITCH TRIM**

**SECTION 1 - GENERAL**

This supplement supplies information necessary for the operation of the airplane when the optional Piper Electric Pitch Trim is installed. The information contained within this supplement is to be used "as described" in conjunction with the complete handbook.

This supplement has been "FAA Approved" as a permanent part of this handbook and must remain in this handbook at all times when the optional Piper Electric Pitch Trim is installed.

**SECTION 2 - LIMITATIONS**

No changes of the basic limitations provided by Section 2 of this Pilot's Operating Handbook are necessary for this supplement.

**SECTION 3 - EMERGENCY PROCEDURES**

- (a) In case of malfunction, PRESS disconnect switch located above the ignition switch.
- (b) In case of malfunction, overpower the electric trim at either control wheel.
- (c) Maximum altitude change with a 4 second delay in recovery initiation is 800 feet and occurs in the descent configuration. Maximum altitude change in the approach configuration with a 4 second recovery delay is 100 feet.

**SECTION 4 - NORMAL PROCEDURES**

The electric trim system may be turned ON or OFF by a switch located above the ignition switch. The pitch trim may be changed when the electric trim system is turned on either by moving the manual pitch trim control wheel or by operating the trim control switch on the pilot's control yoke. To prevent excessive speed increase in the event of an electric trim run-away malfunction, the system incorporates an automatic disconnect feature which renders the system inoperative above approximately 165 MPH IAS. The disconnected condition does not affect the manual trim system.

**SECTION 5 - PERFORMANCE**

No changes to the basic performance provided by Section 5 of this Pilot's Operating Handbook are necessary for this supplement.

THIS PAGE INTENTIONALLY LEFT BLANK

**TABLE OF CONTENTS**

**SECTION 10**

**SAFETY TIPS**

| Paragraph<br>No. |                   | Page<br>No. |
|------------------|-------------------|-------------|
| 10.1             | General .....     | 10-1        |
| 10.3             | Safety Tips ..... | 10-1        |



**SECTION 10**

**SAFETY TIPS**

**10.1 GENERAL**

This section provides safety tips of particular value in the operation of the Cherokee Archer II.

**10.3 SAFETY TIPS**

- (a) Learn to trim for takeoff so that only a very light back pressure on the control wheel is required to lift the airplane off the ground.
- (b) The best speed for takeoff is about 61 MPH IAS (53 KTS IAS) under normal conditions. Trying to pull the airplane off the ground at too low an airspeed decreases the controllability of the airplane in the event of engine failure.
- (c) Flaps may be lowered at airspeeds up to 115 MPH CAS (100 KTS CAS). To reduce flap operating loads, it is desirable to have the airplane at a slower speed before extending the flaps.
- (d) Before attempting to reset any circuit breaker, allow a two to five minute cooling off period.
- (e) Before starting the engine, check that all radio switches, light switches and the pitot heat switch are in the off position so as not to create an overloaded condition when the starter is engaged.
- (f) Strobe lights should not be operating when flying through overcast and clouds, since reflected light can produce spacial disorientation. Do not operate strobe lights when taxiing in the vicinity of other aircraft.
- (g) The rudder pedals are suspended from a torque tube which extends across the fuselage. The pilot should become familiar with the proper positioning of his feet on the rudder pedals so as to avoid interference with the torque tube when moving the rudder pedals or operating the toe brakes.
- (h) In an effort to avoid accidents, pilots should obtain and study the safety related information made available in FAA publications such as regulations, advisory circulars, Aviation News, AIM and safety aids.
- (i) The shape of the wing fuel tanks is such that in certain maneuvers the fuel may move away from the tank outlet. If the outlet is uncovered, the fuel flow will be interrupted and a temporary loss of power may result. Pilots can prevent inadvertent uncovering of the outlet by avoiding maneuvers which could result in uncovering the outlet.

Extreme running turning takeoffs should be avoided as fuel flow interruption may occur.

Prolonged slips or skids which result in excess of 2000 ft. of altitude loss, or other radical or extreme maneuvers which could cause uncovering of the fuel outlet must be avoided as fuel flow interruption may occur when tank being used is not full.

THIS PAGE INTENTIONALLY LEFT BLANK